


LED Lighting Catalogue

Building & Industrial Lights 2022



ERIK C[®]
concepts

160
lm/w

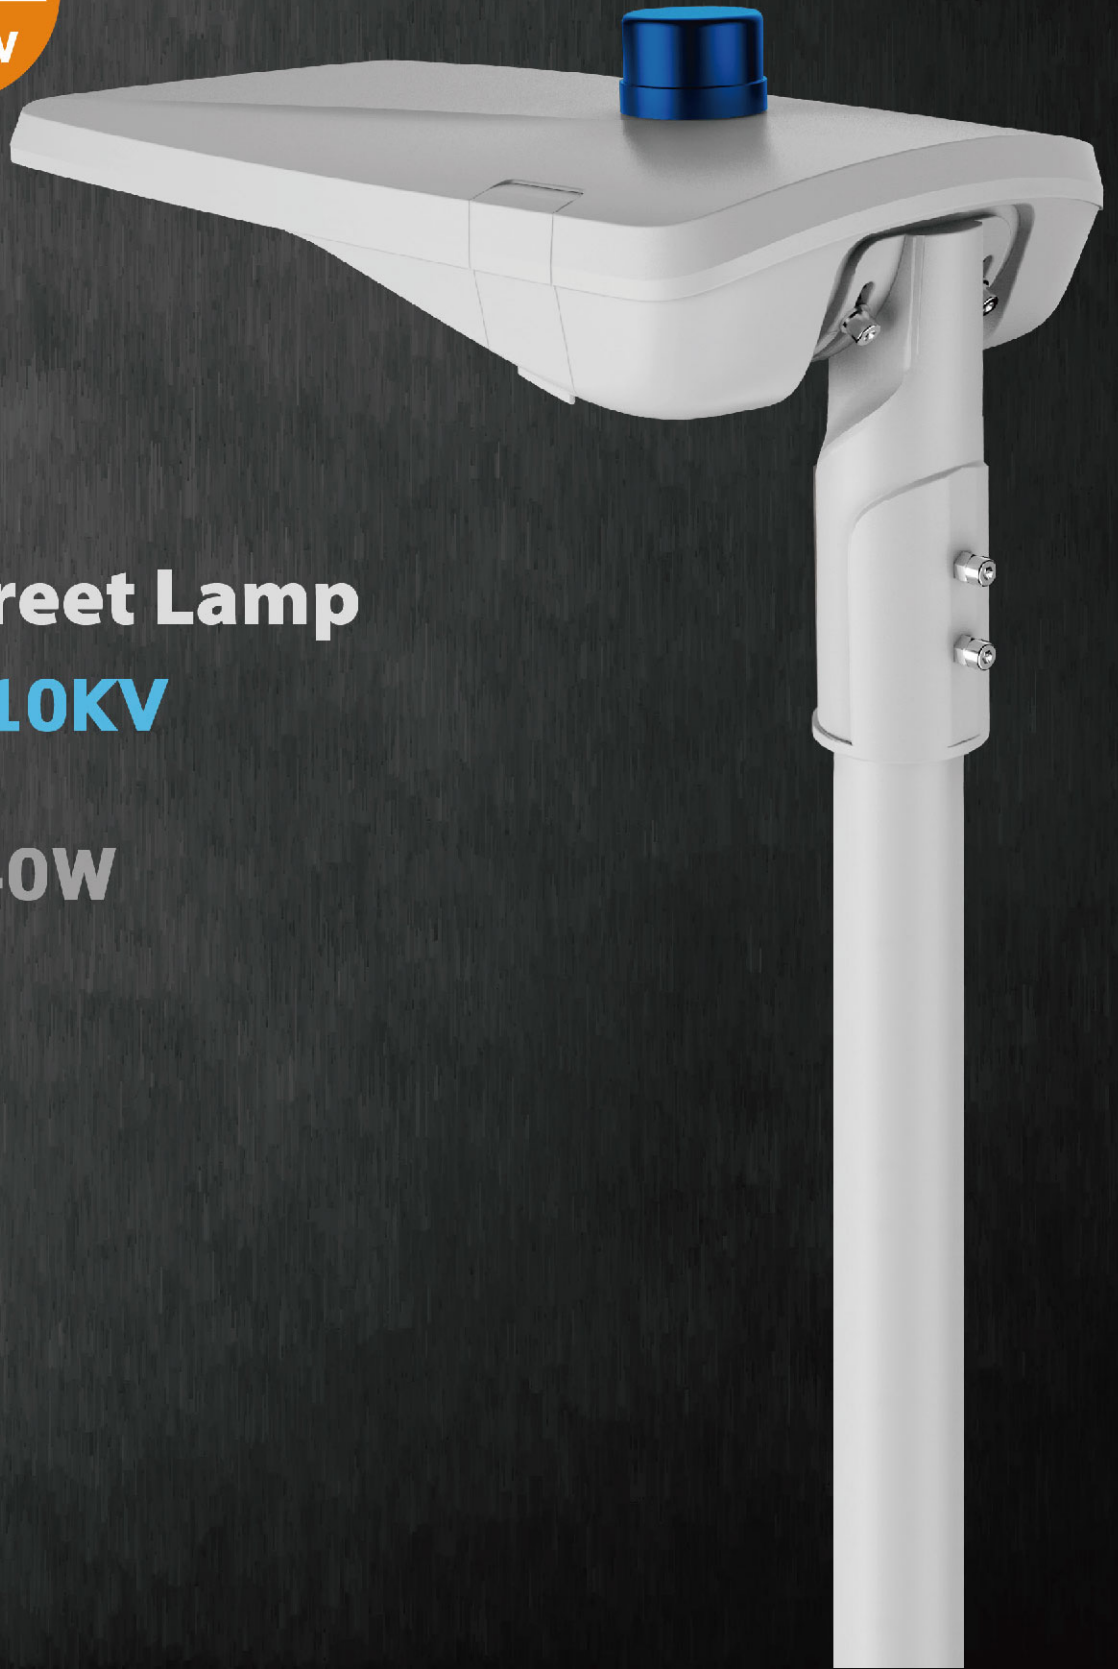

LED Street Lamp

IP65 & 10KV

0-10V

100-240W

Main Street Lamps




LUMILEDS

10KV

160lm/w



Product Details

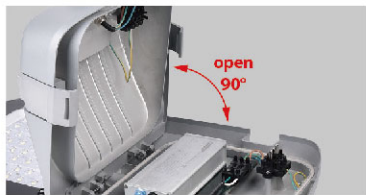


Power-off Protection





Adjustable by +15°~-15°



LUMILEDS SMD3030

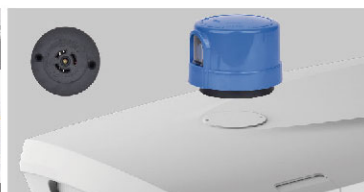

Photocell optionally

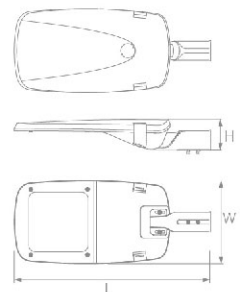

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
RL895	100-277	100	16000	≥80	>0.95	50000	Alu.+Glass	423*179*56	1/0.025/7.5
RL895	100-277	150	24000	≥80	>0.95	50000	Alu.+Glass	505*210*70	1/0.025/7.5
RL895	100-277	200	32000	≥80	>0.95	50000	Alu.+Glass	725*347*156	1/0.036/9
RL895	100-277	240	38400	≥80	>0.95	50000	Alu.+Glass	785*376*165	1/0.036/9

Main Street Lamps








LUMILEDS

10KV

160lm/w



Product Details

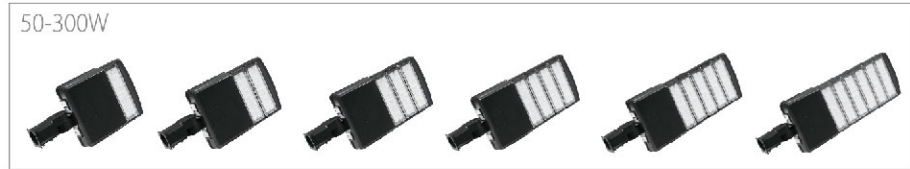

Item No.	Voltage [V]	Wattage [W]	LED Module [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
RL110	100-277	50	8000	≥70	>0.9	50000	Alu.+PC	328*291*89	1/0.030/5.5
RL110	100-277	100	16000	≥70	>0.9	50000	Alu.+PC	409*291*89	1/0.034/6.75
RL110	100-277	150	24000	≥70	>0.9	50000	Alu.+PC	491*291*89	1/0.039/7.99
RL110	100-277	200	32000	≥70	>0.9	50000	Alu.+PC	571*291*89	1/0.044/9.25
RL110	100-277	250	40000	≥70	>0.9	50000	Alu.+PC	651*291*89	1/0.047/10.5
RL110	100-277	300	48000	≥70	>0.9	50000	Alu.+PC	732*291*89	1/0.051/11.85

Main Street Lamps








LUMILEDS

10KV

140lm/w



Product Details

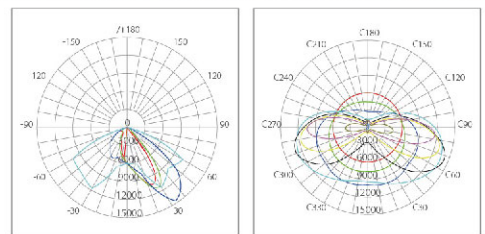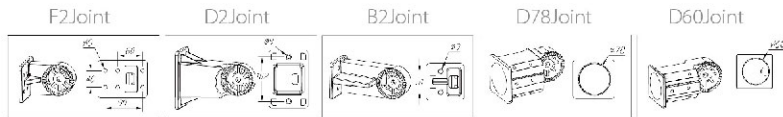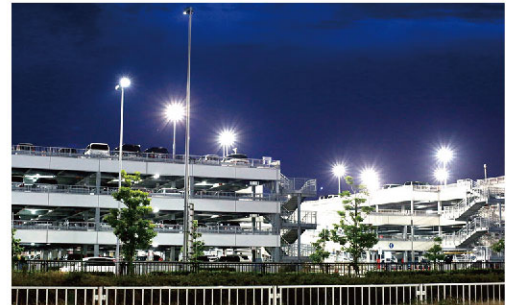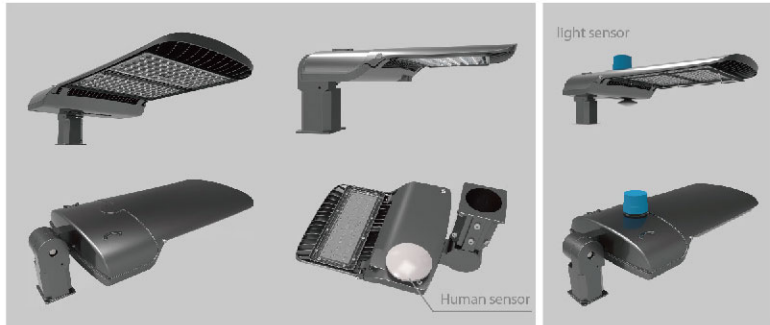

Item No.	Voltage [V]	Wattage [W]	LED Module [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
RL116	100-277	50	7000	≥70	>0.9	50000	Alu.+PC	507*308*81	1/0.018/5.5
RL116	100-277	100	14000	≥70	>0.9	50000	Alu.+PC	565*375*82	1/0.025/7.5
RL116	100-277	150	21000	≥70	>0.9	50000	Alu.+PC	565*375*82	1/0.025/7.5
RL116	100-277	200	28000	≥70	>0.9	50000	Alu.+PC	785*376*101	1/0.036/8.5
RL116	100-277	300	42000	≥70	>0.9	50000	Alu.+PC	785*376*101	1/0.036/8.5

Main Street Lamps



LUMILEDS




10KV

150lm/w

0-10V



Product Details

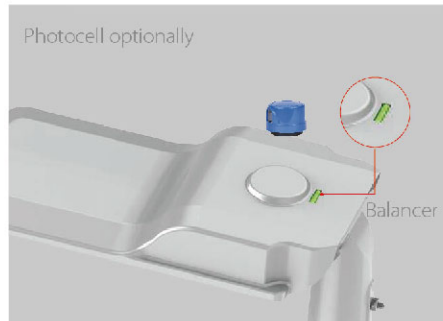

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
RL898	100-277	50	7500	≥70	>0.9	30000	Alu.+Glass	565*200*89	1/0.025/7.5
RL898	100-277	100	15000	≥70	>0.9	30000	Alu.+Glass	611*240*89	1/0.025/7.5
RL898	100-277	150	22500	≥70	>0.9	30000	Alu.+Glass	680*260*89	1/0.036/9
RL898	100-277	200	30000	≥70	>0.9	30000	Alu.+Glass	680*260*89	1/0.036/9

Auxiliary Street Lamps


IP65

120lm/w


30-150W



Product Details

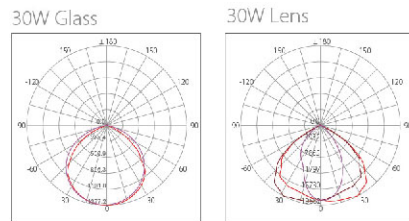

- SMD2835**
- 40°+45°**
- 105°-glass**
- 135°80°-lens**

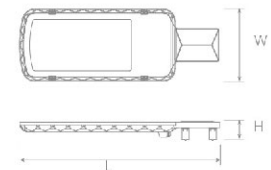

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
RL182-30W-Glass	220-240	30	3000	≥70	>0.9	20000	Alu.+glass	293*126*53	10/0.04/7.1
RL182-50W-Glass	220-240	50	5000	≥70	>0.9	20000	Alu.+glass	347*136*53	6/0.04/7
RL182-100W-Glass	220-240	100	10000	≥70	>0.9	20000	Alu.+glass	455*170*53	6/0.04/12.9
RL182-150W-Glass	220-240	150	15000	≥70	>0.9	20000	Alu.+glass	550*200*53	4/0.04/14
RL182-30W-Lens	220-240	30	3600	≥70	>0.9	20000	Alu.+PC	293*126*53	10/0.04/7.1
RL182-50W-Lens	220-240	50	6000	≥70	>0.9	20000	Alu.+PC	347*136*53	6/0.04/7
RL182-100W-Lens	220-240	100	12000	≥70	>0.9	20000	Alu.+PC	455*170*53	6/0.04/12.9
RL182-150W-Lens	220-240	150	18000	≥70	>0.9	20000	Alu.+PC	550*200*53	4/0.04/14

Auxiliary Street Lamps



IP65

130lm/w


30-200W




Product Details

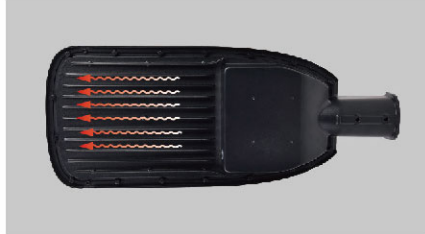

100W Lens



100W glass




SMD2835



-40° +40°



50x120°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
RL160	100-240V	50	6000	≥70	>0.9	20000	Alu.	385*165*50	4/0.025/6.8
RL160	100-240V	100	12000	≥70	>0.9	20000	Alu.	500*210*65	2/0.026/5.2
RL160	100-240V	150	18000	≥70	>0.9	20000	Alu.	600*245*70	1/0.015/4
RL160	100-240V	200	240000	≥70	>0.9	20000	Alu.	587*242*80	2/0.036/6.5

Auxiliary Street Lamps

IP65

100lm/w



Product Details





30-150W



SMD3030



150W

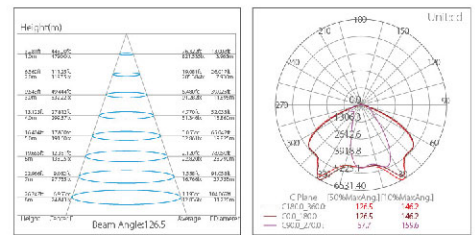

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
RL179	100-240	30	3000	≥80	>0.9	30000	Alu.+PC	130*53*340	20/0.064/13.6
RL179	100-240	50	5000	≥80	>0.9	30000	Alu.+PC	155*55*390	10/0.044/9.6
RL179	100-240	100	10000	≥80	>0.9	30000	Alu.+PC	160*65*450	10/0.048/14
RL179	100-240	150	15000	≥80	>0.9	30000	Alu.+PC	170*65*570	5/0.041/10


Auxiliary Street Lamps

IP65


100lm/w



Product Details

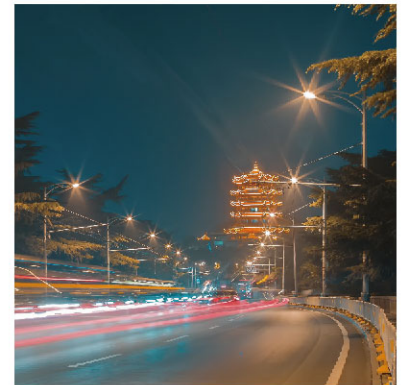

 **SMD3030**
 **-40°+55°**
 **TYPE II**

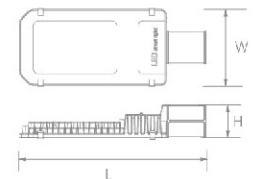

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
RL178W	100-240	50	5000	≥70	>0.9	30000	Alu.+Tempered glass	180*88*490	10 / 0.08 / 20.7
RL178W	100-240	100	10000	≥70	>0.9	30000	Alu.+Tempered glass	215*88*562	6 / 0.068 / 18
RL178W	100-240	150	15000	>70	>0.9	30000	Alu.+Tempered glass	234*98*627	4 / 0.067 / 22

Courtyard Street Lamps



LUMILEDS


IP65

Available colors

Black Dark Grey Silver Grey



Product Details

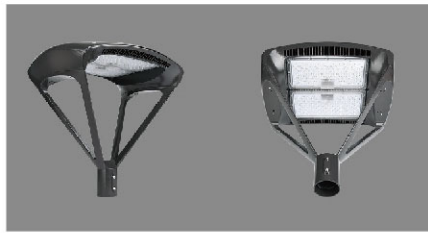

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
PA302	100-277	35	3000	≥70	>0.9	50 000	Alu.+PC	558*400*585	1/0.179/15.5
PA302	100-277	50	5000	≥70	>0.9	50 000	Alu.+PC	558*400*585	1/0.179/15.5
PA302	100-277	100	10000	≥70	>0.9	50 000	Alu.+PC	558*400*585	1/0.179/15.5
PA302	100-277	150	15000	≥70	>0.9	50 000	Alu.+PC	558*400*585	1/0.179/15.5
PA302	100-277	200	20000	≥70	>0.9	50 000	Alu.+PC	558*400*585	1/0.179/15.5
PA302	100-277	300	30000	≥70	>0.9	50 000	Alu.+PC	558*400*585	1/0.179/15.5

Courtyard Street Lamps



LUMILEDS


IP65

Available colors

Black Dark Grey Silver Grey



Product Details

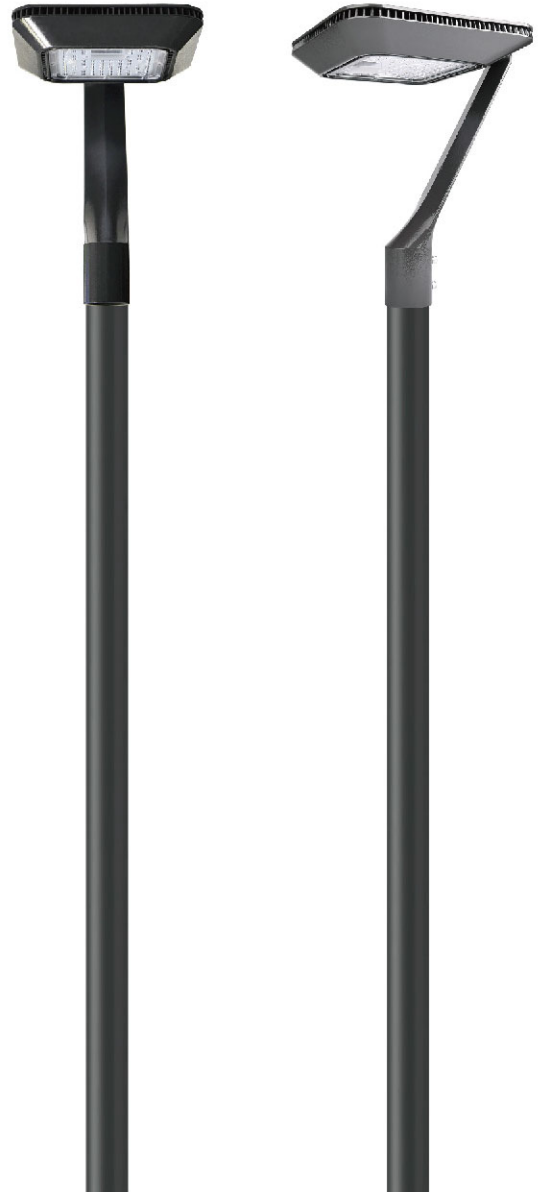

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
PA301	100-277	20	1900	≥70	>0.9	50 000	Alu.+PC	286*240*340	1/0.038/6
PA301	100-277	35	3325	≥70	>0.9	50 000	Alu.+PC	286*240*340	1/0.038/6
PA301	100-277	50	4750	≥70	>0.9	50 000	Alu.+PC	351*300*436	1/0.067/6
PA301	100-277	100	9500	≥70	>0.9	50 000	Alu.+PC	351*300*436	1/0.067/6



Stadium & Tunnel Lamps



Stadium & Tunnel Lights



LUMILEDS
IP66 & 20KV
0-10V/DMX/DALI
135lm/w



Product Details

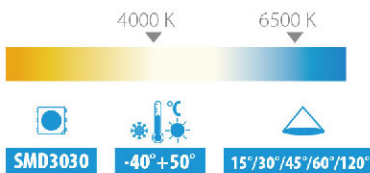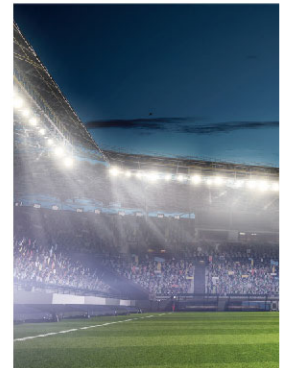

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
QL101C	100-240	500	67500	≥70	>0.9	50000	Alu.	563*313*413	1/0.060/11
QL101C	100-240	1000	135000	≥70	>0.9	50000	Alu.	665*603*574	1/0.134/27.3
QL101C	100-240	1500	202500	≥70	>0.9	50000	Alu.	665*885*811	1/0.198/41
QL101C	100-240	2000	270000	≥70	>0.9	50000	Alu.	1166*603*573	1/0.221/54.6





Stadium & Tunnel Lights



LUMILEDS
IP66 & 20KV
0-10V/DMX/DALI
145lm/w



Product Details

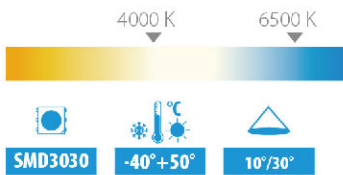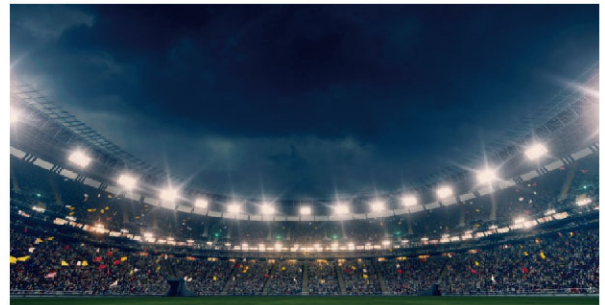

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [DxL:mm]	Packing [Pcs / M ³ / KG]
QL102C	100-240	300	39000	≥70	>0.9	50000	Alu.	Φ381*391	1/0.113/13.6
QL102C	100-240	400	52000	≥70	>0.9	50000	Alu.	Φ381*391	1/0.113/13.6
QL102C	100-240	500	65000	≥70	>0.9	50000	Alu.	Φ381*391	1/0.113/13.6
QL102C	100-240	750	97500	≥70	>0.9	50000	Alu.	Φ478*508	1/0.170/27.2
QL102C	100-240	1000	130000	≥70	>0.9	50000	Alu.	Φ478*508	1/0.170/27.2
QL102C	100-240	1250	162500	≥70	>0.9	50000	Alu.	Φ478*508	1/0.170/27.2

Stadium & Tunnel Lights





LUMILEDS

IP66 & IK08

130lm/w



Product Details

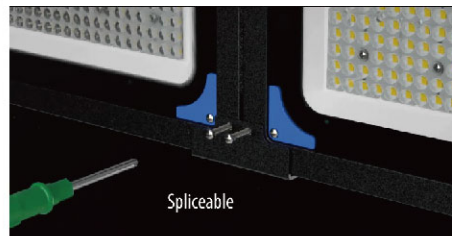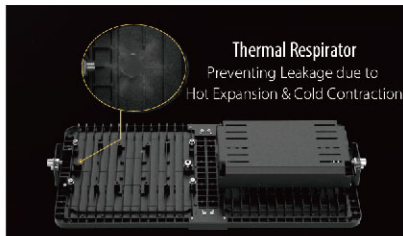

4000 K 6500 K

SMD2835 -40°+50° 10°/15°/30°/45°/60°/90°/120°

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
QL105C	100-277	250	32500	≥70	>0.9	50000	Alu.	336*350*97	1/0.018/5.7
QL105C	100-277	500	65000	≥70	>0.9	50000	Alu.	654*360*100	1/0.035/12
QL105C	100-277	750	97500	≥70	>0.9	50000	Alu.	970*360*100	1/0.052/17.3
QL105C	100-277	1000	130000	≥70	>0.9	50000	Alu.	656*680*100	1/0.066/23

Stadium & Tunnel Lights



LUMILEDS

IP66

130lm/w




Product Details:



PC lens
Even light diffusion, no glare



The lighting area can be adjusted as required

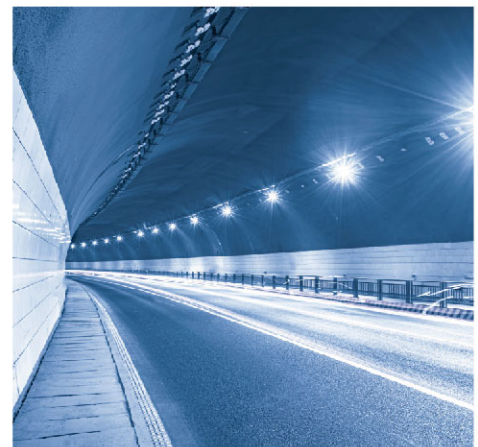

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
QL103C	100-240	100	13000	≥70	>0.9	30000	Alu.	175*350*75	1/0.014/1.6
QL103C	100-240	200	26000	≥70	>0.9	30000	Alu.	250*350*75	1/0.016/2.4
QL103C	100-240	300	39000	≥70	>0.9	30000	Alu.	340*350*75	1/0.018/3.3
QL103C	100-240	400	52000	≥70	>0.9	30000	Alu.	410*350*75	1/0.023/4.2
QL1033C	100-240	500	65000	≥70	>0.9	30000	Alu.	485*350*75	1/0.027/5.0

Stadium & Tunnel Lights





LUMILEDS

IP65



130lm/w



Product Details:

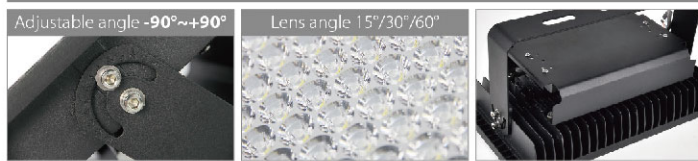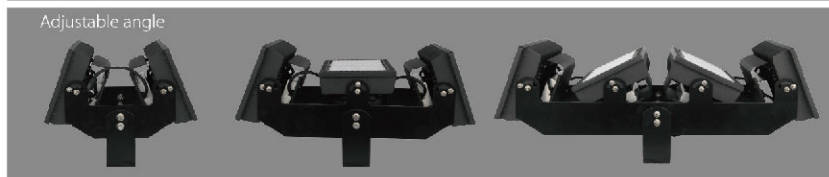

500W

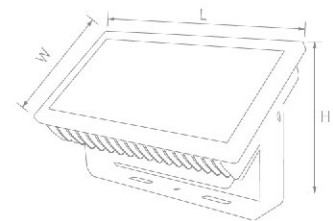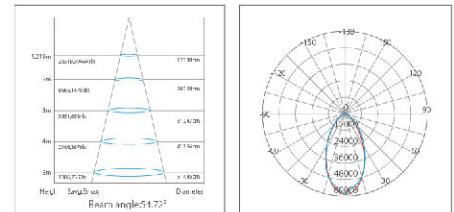

3000 K 4000 K 6500 K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG661-250W-C	100-277	250	32500	≥70	>0.9	50000	Alu.	401*215*128	1/0.026/8
LG661-500W-C	100-277	500	65000	≥70	>0.9	50000	Alu.	462*405*283	1/0.060/18
LG661-750W-C	100-277	750	97500	≥70	>0.9	50000	Alu.	698*405*283	1/0.076/27
LG661-1000W-C	100-277	1000	130000	≥70	>0.9	50000	Alu.	954*405*285	1/0.137/31.9

Stadium & Tunnel Lights





LUMILEDS

IP65




100lm/w



Product Details

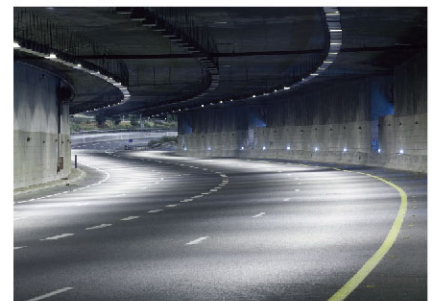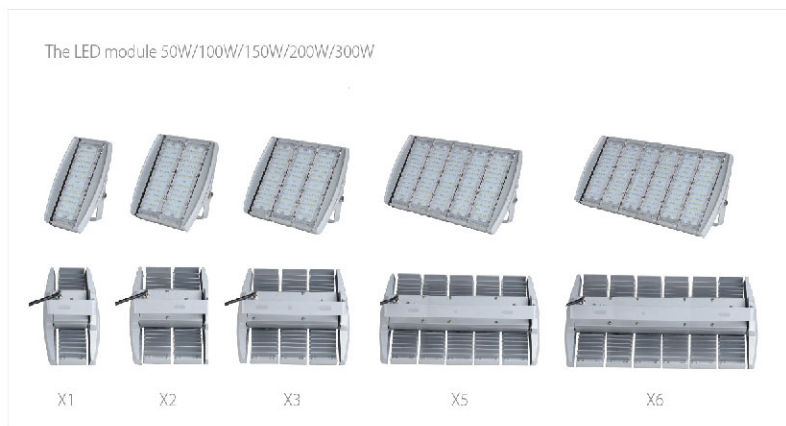

50W

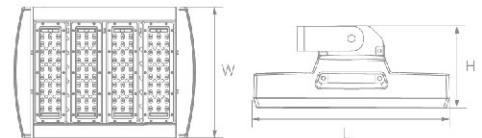

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG603	100-277	50	5000	≥70	>0.9	50000	Alu.+PC	161*281*118	4/0.045/14
LG603	100-277	100	10000	≥70	>0.9	50000	Alu.+PC	237*281*118	2/0.025/10
LG603	100-277	150	15000	≥70	>0.9	50000	Alu.+PC	322*281*118	1/0.035/7.5
LG603	100-277	200	20000	≥70	>0.9	50000	Alu.+PC	402*281*118	1/0.050/10
LG603	100-277	300	30000	≥70	>0.9	50000	Alu.+PC	483*281*118	1/0.075/12



Floodlights

LED Floodlights



Color Temp.
adjustable




120lm/w

IP65 & IK08

IP54 & IK06



Product Details:

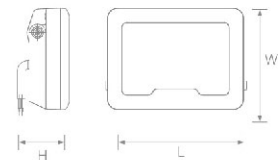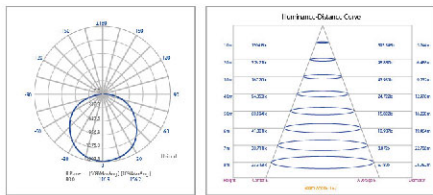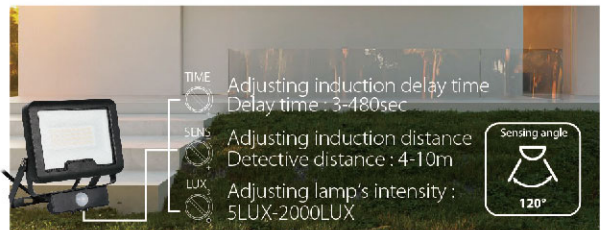

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG155C-TDC	220-240	20	2400	≥80	>0.9	30000	Alu.+Glass	141*105*44	24/0.023/15.6
LG155C-TDC	220-240	30	3600	≥80	>0.9	30000	Alu.+Glass	181*130*44	18/0.041/16.2
LG155C-TDC	220-240	50	6000	≥80	>0.9	30000	Alu.+Glass	218*155*44	12/0.034/15.6
LG155C-TDC	220-240	100	12000	≥80	>0.9	30000	Alu.+Glass	300*200*52	6/0.034/16.8
LG155C-TDC-DPIR	220-240	20	2400	≥80	>0.9	30000	Alu.+Glass	147*60*178	20/0.043/16.8
LG155C-TDC-DPIR	220-240	30	3600	≥80	>0.9	30000	Alu.+Glass	183*60*204	15/0.045/16.8
LG155C-TDC-DPIR	220-240	50	6000	≥80	>0.9	30000	Alu.+Glass	218*60*242	10/0.042/15

LED Floodlights



Die-casting Aluminum
90lm/w
IP65 /IP44



CE **RoHS** **ErP2.0**

Optional Cover




Optional accessories




20W-50W are available with infrared induction

- LUX** Adjusting lamp's intensity 5-2000 lx
- TIME** Adjusting induction delay time Delay time 5-480ses
- SENS** Adjusting induction distance Detective distance 2-8m



3000 K 4000 K 6500 K

SMD2835 **-40°+40°** **110°**

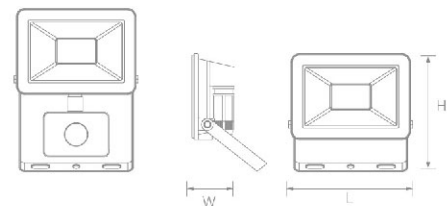

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG157C	220-240	10	900	≥80	>0.5	30000	Alu.+Glass	104*58*74	50/0.038/13.5
LG157C	220-240	20	1800	≥80	>0.7	30000	Alu.+Glass	123*58*95	30/0.032/11.5
LG157C	220-240	30	2700	≥80	>0.9	30000	Alu.+Glass	148*58*112	30/0.044/15
LG157C	220-240	50	4500	≥80	>0.9	30000	Alu.+Glass	198*59*147	15/0.038/13.5
LG157C	220-240	100	9000	≥80	>0.9	30000	Alu.+Glass	274*195*37	5/0.035 / 6.93
LG157C	220-240	150	13500	≥80	>0.9	30000	Alu.+Glass	336*246*42	5/0.055 /12
LG157C	220-240	200	18000	≥80	>0.9	30000	Alu.+Glass	381*275*45	4/ 0.053/13.4

LED Floodlights

RGBW



Remote control

RGBW+CCT


IP65

CE **RoHS** **ErP2.0**





Product Details:

The product takes the lighting effect actually

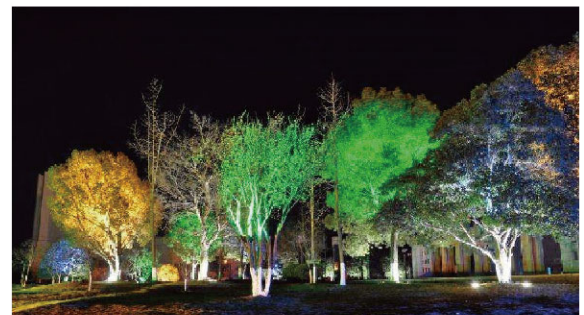

Instructions for remote control

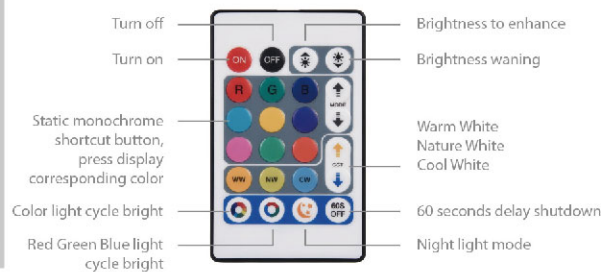

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	LED ChipType	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG1166- RGBW	220-240	15	1250	2835+5054	/	>0.5	30000	Alu.+PC	120*90*25	40/0.026/14

ISPOT Ultra Thin Design

with Respirator

100lm/w

IP65

NO Frame



Product Details

Respirator

1. Prolong LED lifespan
2. Eliminate moisture inside
3. Better heat dissipation

Backside beautiful arc design and heat dissipation are perfectly combined

Ultra Thin Design



15mm/10W/20W/30W

4mm

4mm toughened glass



SMD2835 **-40°+40°** **110°**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG168	220-240	10	1000	≥70	>0.5	30000	Alu.	120*31*88	40/0.029/13.2
LG168	220-240	20	2000	≥70	>0.9	30000	Alu.	162*31*118	30/0.039/17.2
LG168	220-240	30	3000	≥70	>0.9	30000	Alu.	196*31*142	20/0.037/15.8
LG168	220-240	50	5000	≥70	>0.9	30000	Alu.	235*33*164	15/0.04/17.6
LG168	220-240	70	7000	≥70	>0.9	30000	Alu.	275*41*200	4/0.035/9.5
LG168	220-240	100	10000	≥70	>0.9	30000	Alu.	300*48*220	4/0.045/12

ISPOT Ultra Thin Design





100lm/w

IP44



CE **RoHS** **ErP2.0**

Product Details

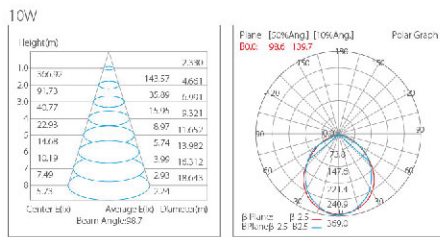

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ² / KG]
LG168C-10W-DPIR	220-240	10	1000	≥80	>0.9	30000	Alu.	120*31*150	40/0.029/13.2
LG168C-20W-DPIR	220-240	20	2000	≥80	>0.9	30000	Alu.	162*31*180	30/0.039/17.2
LG168C-30W-DPIR	220-240	30	3000	≥80	>0.9	30000	Alu.	196*31*207	20/0.037/15.8
LG168C-50W-DPIR	220-240	50	5000	≥80	>0.9	30000	Alu.	235*33*229	15/0.04/17.6

ISPOT LED flood lights



100lm/w

IP44




CE **RoHS** **ErP 2.0**





Product Details



✓ inclined bracket, convenient for installation

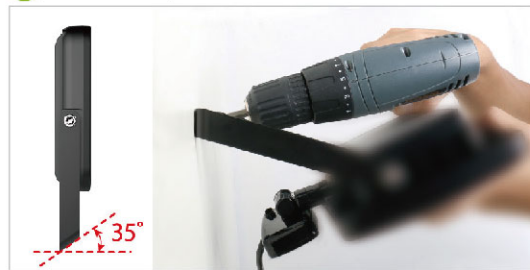

50W

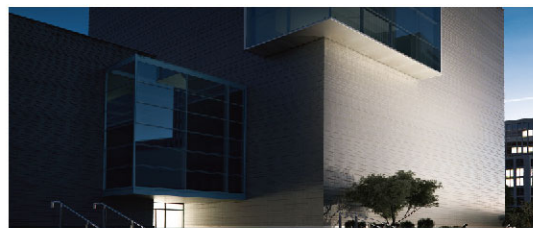

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG158S	220-240V	10	1000	≥70	>0.5	30000	Alu.	131*40*188	20/0.025/15
LG158S	220-240V	20	2000	≥70	>0.5	30000	Alu.	184*49*225	20/0.040/20
LG158S	220-240V	30	3000	≥70	>0.9	30000	Alu.	215*60*260	10/0.035/15
LG158S	220-240V	50	5000	≥70	>0.9	30000	Alu.	230*60*295	10/0.045/22

LED Floodlights

10-300w

120lm/w

IP65



Optional

Product details

SMD

With lens



High grade construction stainless steel

IP65






Counter flow design for cooling and protection, avoid leaves, insects and other accumulations

Inclined bracket, convenient for installation

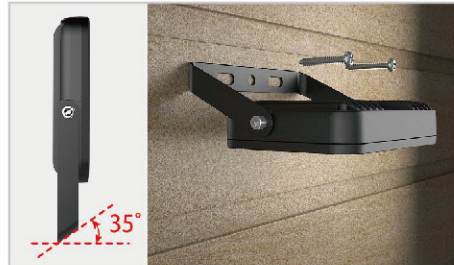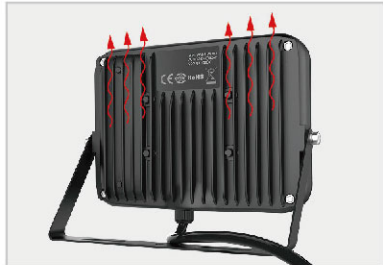

10W



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG158	220-240V	10	1200	≥70	>0.5	30000	Alu.	110*26*95	60/0.035/14.8
LG158	220-240V	20	2400	≥70	>0.5	30000	Alu.	132*28*115	40/0.035/13.4
LG158	220-240V	30	3600	≥70	>0.9	30000	Alu.	185*30*160	40/0.053/24.8
LG158	220-240V	50	6000	≥70	>0.9	30000	Alu.	216*32*185	20/0.041/18.2
LG158	220-240V	70	8400	≥70	>0.9	30000	Alu.	275*41*205	20/0.048/21.3
LG158	220-240V	100	12000	≥70	>0.9	30000	Alu.	328*41*268	4/0.021/9.31
LG158	220-240V	150	18000	≥70	>0.9	30000	Alu.	380*45*305	4/0.031/12.9
LG158	220-240V	300	360000	≥70	>0.9	30000	Alu.	539*49*376	1/0.025/8.1

LED Floodlights




100lm/w

IP65 / IP44






CE **RoHS** **ErP2.0**

Products

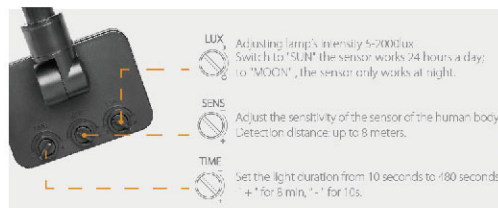

Counter flow design for cooling and protection, avoid leaves, insects and other accumulations

Inclined bracket, convenient for installation

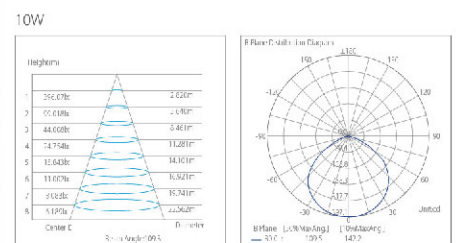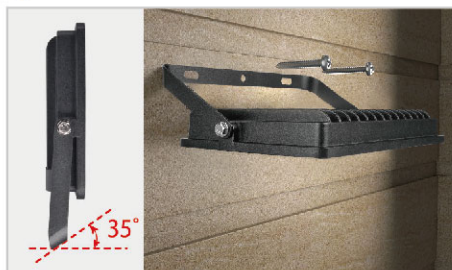

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG162	220-240V	10	1000	≥70	>0.9	20000	Alu.+glass	90*63*25	80/0.031/10.6
LG162	220-240V	20	2000	≥70	>0.9	20000	Alu.+glass	108*82*28	60/0.030/11.8
LG162	220-240V	30	3000	≥70	>0.9	20000	Alu.+glass	143*102*30	40/0.032/13
LG162	220-240V	50	5000	≥70	>0.9	20000	Alu.+glass	183*132*30	20/0.027/12

LED Floodlights

RGB



Remote control



IP65

Product Details:

The actual lighting effect of the product



Mounting options



Three mounting options to cover all area lighting applications.

RGB




SMD2835



-20°+40°



110°



Item No.	Voltage [V]	Wattage [W]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG189L-10W3-RGB	100~240	10	≥80	>0.5	30000	Alu.+Glass	103x77x23	60/0.02/11
LG189L-20W3-RGB	100~240	20	≥80	>0.5	30000	Alu.+Glass	135.5x108x24	40/0.03/12
LG189L-30W3-RGB	100~240	30	≥80	>0.9	30000	Alu.+Glass	176x136x25.5	40/0.03/15
LG189L-50W3-RGB	100~240	50	≥80	>0.9	30000	Alu.+Glass	210x162.8x28	20/0.03/18

LED Floodlights

10-500w

120lm/w

IP65



CE **RoHS** **ErP2.0**

Products



Product Details:





Optional Cover 10~50W



Ultra thin Design



High grade construction stainless steel Exquisite workmanship and high quality 200W

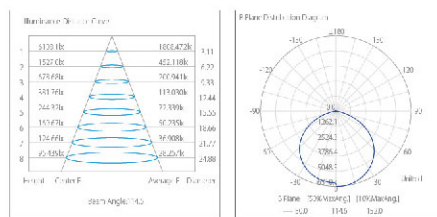

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG189	220-240	10	1200	≥80	>0.7	30000	Alu.+Glass	103*77*23	60/0.025/12
LG189	220-240	20	2400	≥80	>0.7	30000	Alu.+Glass	136*108*24	40/0.027/14
LG189	220-240	30	3600	≥80	>0.9	30000	Alu.+Glass	176*136*25.5	20/0.022/10
LG189	220-240	50	6000	≥80	>0.9	30000	Alu.+Glass	210*163*28	10/0.017/9
LG189	220-240	100	12000	≥80	>0.9	30000	Alu.+Glass	255*198*36	10/0.028/11
LG189	220-240	150	18000	≥80	>0.9	30000	Alu.+Glass	315*233*38	5/0.034/15
LG189	220-240	200	24000	≥80	>0.9	30000	Alu.+Glass	410*298*40	4/0.015/14
LG189	220-240	300	36000	≥80	>0.9	30000	Alu.+Glass	521*378*53	10/0.11/8
LG189	220-240	400	48000	≥80	>0.9	30000	Alu.+Glass	696*419*56	12/0.16/10
LG189	220-240	500	60000	≥80	>0.9	30000	Alu.+Glass	696*419*56	12/0.16/10

LED Floodlights



80lm/w
IP65 / IP44



Product Details:



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG171-10W-L-PIR	220-240	10	750	≥70	>0.5	30000	Alu.+PC	102*150.5*54	50 / * / *
LG171-20W-L-PIR	220-240	20	1500	≥70	>0.5	30000	Alu.+PC	102*150.5*54	50 / * / *
LG171-30W-L-PIR	220-240	30	2250	≥70	>0.9	30000	Alu.+PC	127*171.5*54	30 / * / *
LG171-50W-L-PIR	220-240	50	3750	≥70	>0.9	30000	Alu.+PC	167*200*54	20 / * / *
LG171-10W-DOB	100-240	10	800	≥70	>0.5	30000	Alu.+PC	85.6*67.6*29	100 / * / *
LG171-20W-DOB	100-240	20	1600	≥70	>0.5	30000	Alu.+PC	101*83*29.5	50 / * / *
LG171-30W-DOB	100-240	30	2400	≥70	>0.5	30000	Alu.+PC	126*103*29	40 / * / *
LG171-50W-DOB	100-240	50	4000	≥70	>0.5	30000	Alu.+PC	167*134*30.5	20 / * / *
LG171-100W-DOB	100-240	100	8000	≥70	>0.5	30000	Alu.+PC	226*185*30.5	10 / * / *
LG171-10W-L	220-240	10	750	≥70	>0.5	30000	Alu.+PC	85.6*67.6*29	100 / * / *
LG171-20W-L	220-240	20	1500	≥70	>0.5	30000	Alu.+PC	101*83*29.5	50 / * / *
LG171-30W-L	220-240	30	2250	≥70	>0.9	30000	Alu.+PC	126*103*29	40 / * / *
LG171-50W-L	220-240	50	3750	≥70	>0.9	30000	Alu.+PC	167*134*30.5	20 / * / *
LG171-70W-L	220-240	70	5250	≥70	>0.9	30000	Alu.+PC	195*162*30.5	10 / * / *
LG171-100W-L	220-240	100	7500	≥70	>0.9	30000	Alu.+PC	226*185*30.5	10 / * / *

LED Floodlights







10-300W
100lm/w
IP65/IP44



CE **RoHS** **ErP 2.0**

Product Details:

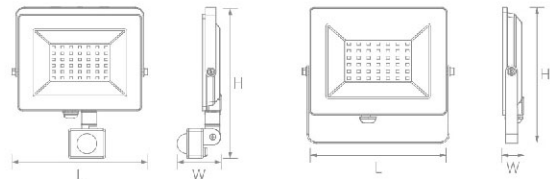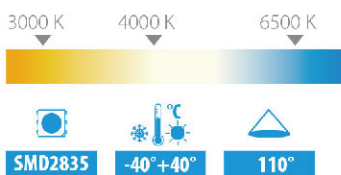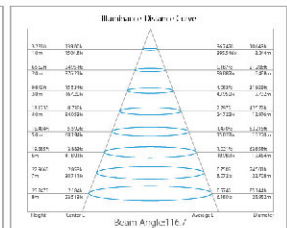

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG175S	220-240	20	2000	≥80	>0.5	20000	Alu.	117.6*90*21	30/0.04/10
LG175S	220-240	30	3000	≥80	>0.9	20000	Alu.	140.6*110*21	30/0.05/13.5
LG175S	220-240	50	5000	≥80	>0.9	20000	Alu.	183*143*22	20/0.06/15
LG175	220-240	10	1000	≥80	>0.5	20000	Alu.	81.2*63*21	50/0.030/11
LG175	220-240	20	2000	≥80	>0.5	20000	Alu.	117.6*90*21	40/0.035/12
LG175	220-240	30	3000	≥80	>0.9	20000	Alu.	140.6*110*21	20/0.032/15
LG175	220-240	50	5000	≥80	>0.9	20000	Alu.	183*143*22	20/0.056/18
LG175	220-240	70	7000	≥80	>0.9	20000	Alu.	183*143*22	10/0.045/10
LG175	220-240	100	10000	≥80	>0.9	20000	Alu.	205*150*22	10/0.054/13
LG175	220-240	150	15000	≥80	>0.9	20000	Alu.	265*188*52	10/0.058/13
LG175	220-240	200	20000	≥80	>0.9	20000	Alu.	380*306*55	4/0.046/12
LG175	220-240	300	30000	≥80	>0.9	20000	Alu.	420*300*42	4/0.058/15

LED Floodlights

10-400W

IP65



Product Details:






With border

Die-casting Aluminum

With Respirator

Ultra Thin

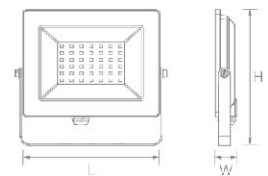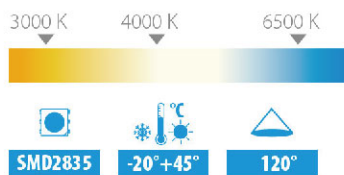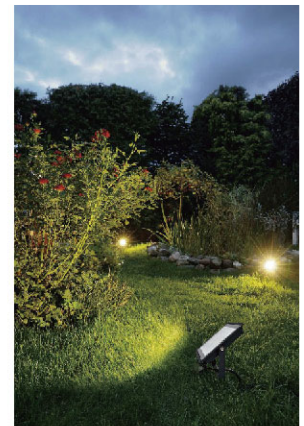

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG195	100-240	10	800	≥80	>0.5	25000	Alu.+Glass	101*81*26	60/0.017/10.5
LG195	100-240	20	1600	≥80	>0.9	25000	Alu.+Glass	118*93*28	60/0.023/14
LG195	100-240	30	2400	≥80	>0.9	25000	Alu.+Glass	160*120*28	40/0.026/13
LG195	100-240	50	4000	≥80	>0.5	25000	Alu.+Glass	204*159*28	40/0.045/15
LG195	100-240	100	8000	≥80	>0.5	25000	Alu.+Glass	271*211*38	20/0.039/18.5
LG195	100-240	150	12000	≥80	>0.9	25000	Alu.+Glass	322*230*38	20/0.046/21
LG195	100-240	200	16000	≥80	>0.9	25000	Alu.+Glass	381*280*40	5/0.026/13.5
LG195	100-240	300	24000	≥80	>0.9	25000	Alu.+Glass	420*320*50	5/0.033/18.5
LG195	100-240	400	32000	≥80	>0.9	25000	Alu.+Glass	460*345*50	4/0.036/21.5



LED Floodlights

10-400W

IP65



Product Details:

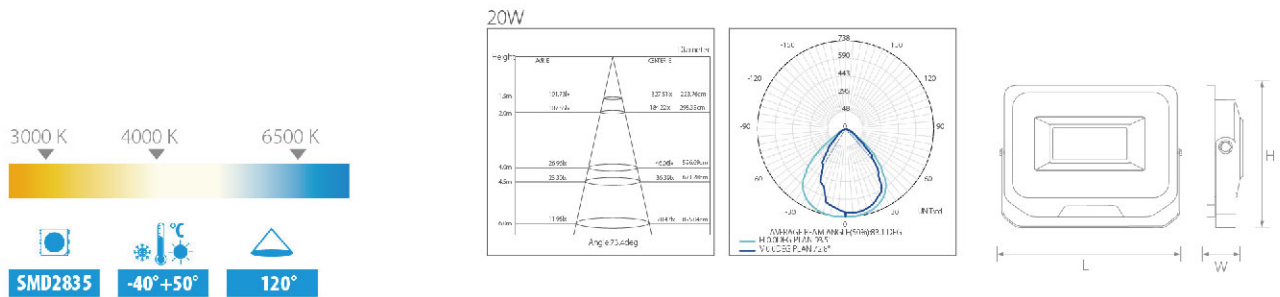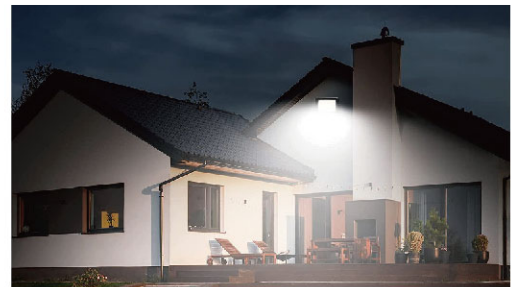

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
LG145	100-265	10	720	≥70	>0.5	30000	Alu.+Glass	103*25*68	40/0.029/8.8
LG145	100-265	20	1440	≥70	>0.5	30000	Alu.+Glass	100*34*80	40/0.029/8.8
LG145	100-265	30	2160	≥70	>0.5	30000	Alu.+Glass	132*34*102	40/0.029/8.8
LG145	100-265	50	3600	≥70	>0.5	30000	Alu.+Glass	175*38*130	30/0.035/11.2
LG145	100-265	70	5040	≥70	>0.5	30000	Alu.+Glass	220*38*173	10/0.028/9.4
LG145	100-265	100	7200	≥70	>0.5	30000	Alu.+Glass	255*38*195	10/0.028/9.4
LG145	100-265	150	10800	≥70	>0.5	30000	Alu.+Glass	290*45*220	10/0.035/11.9
LG145	100-265	200	14400	≥70	>0.5	30000	Alu.+Glass	340*45*240	10/0.038/12.9
LG145	100-265	300	21600	≥70	>0.5	30000	Alu.+Glass	395*48*290	5/0.024/7.9
LG145	100-265	400	28800	≥70	>0.5	30000	Alu.+Glass	455*48*335	4/0.023/7.8



LED Floodlights

160lm/w

IP65



Product details

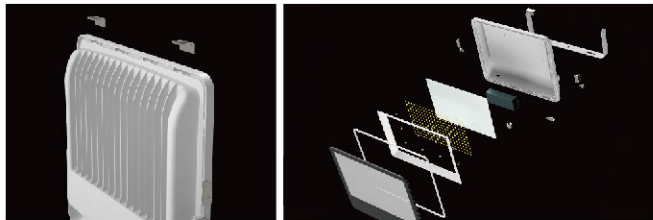

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
LG194	100-277	20	3200	≥70	>0.9	50000	Alu.	223*181*35	20/0.046/13.8
LG194	100-277	30	4800	≥70	>0.9	50000	Alu.	223*181*35	20/0.046/14
LG194	100-277	50	8000	≥70	>0.9	50000	Alu.	253*211*35	15/0.045/13.5
LG194	100-277	100	16000	≥70	>0.9	50000	Alu.	284*241*40	10/0.041/12.5
LG194	100-277	150	24000	≥70	>0.9	50000	Alu.	314*272*43	5/0.029/7
LG194	100-277	200	32000	≥70	>0.9	50000	Alu.	344*301*43	5/0.034/8.5



LED Floodlights




100lm/w
100-300w
IP65



Product details

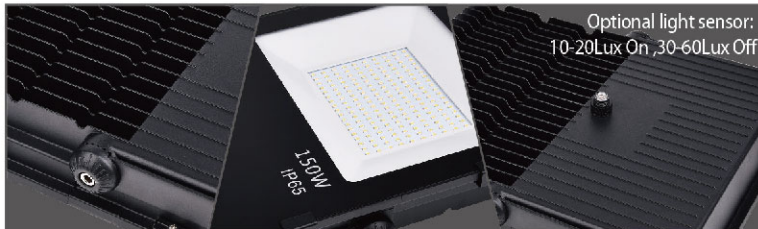

1. Die casting aluminum shell, interactive struction, greatly improve the heat dissipation;
2. Ultra thin design;
3. Unique space for sticker, more reasonable;
4. Bracket with adjustable gear for easy angle adjustment.



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ² / KG]
LG198	100-240	100	10000	≥70	>0.9	30000	Alu.	341*257*59	2/0.019/8
LG198	100-240	150	15000	≥70	>0.9	30000	Alu.	374*280*63	2/0.027/9
LG198	100-240	200	20000	≥70	>0.9	30000	Alu.	417*299*68	1/0.024/5
LG198	100-240	300	30000	≥70	>0.9	30000	Alu.	482*345*73	1/0.04/9


LED Floodlights

10-500w

IP65




Product Details:

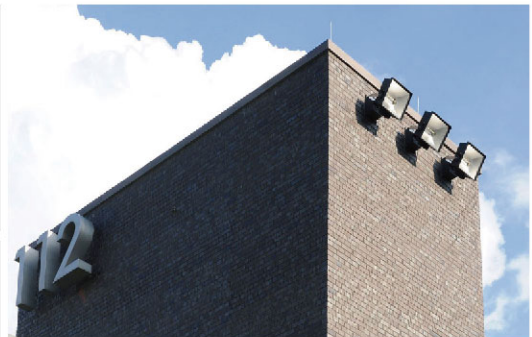

3000 K 4000 K 6500 K

SMD2835 **-40°+45°** **110°**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ² / KG]
LG149	100-265	10	800	≥80	>0.5	30000	Alu.	99*34*79	50/0.025/10
LG149	100-265	20	1600	≥80	>0.5	30000	Alu.	118*35*88	50/0.023/12
LG149	100-265	30	2400	≥80	>0.9	30000	Alu.	160*35*120	30/0.031/11
LG149	100-265	50	4000	≥80	>0.9	30000	Alu.	210*55*170	10/0.050/7
LG149	100-265	100	8000	≥80	>0.9	30000	Alu.	280*70*230	5/0.040/7.5
LG149	100-265	200	16000	≥80	>0.9	30000	Alu.	350*90*278	4/0.046/7
LG149	100-265	300	24000	≥80	>0.9	30000	Alu.	370*80*435	2/0.030/7.5
LG149	100-265	500	40000	≥80	>0.9	30000	Alu.	440*100*520	1/0.022/8.5



LED Floodlights

30-300w

IP65



Product Details:

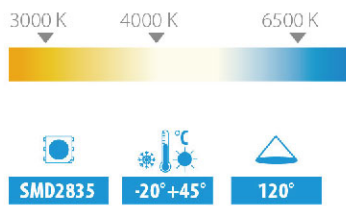

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
LG197	100-240	30	2400	≥70	>0.5	25000	Alu.+Glass	159*176*34	20/0.025/16
LG197	100-240	50	4000	≥70	>0.5	25000	Alu.+Glass	206*244*40	20/0.051/17
LG197	100-240	100	8000	≥70	>0.9	25000	Alu.+Glass	258*300*41	10/0.039/16
LG197	100-240	150	12000	≥70	>0.9	25000	Alu.+Glass	286*323*44	10/0.051/13
LG197	100-240	200	16000	≥70	>0.9	25000	Alu.+Glass	325*365*49	5/0.036/14.5
LG197	100-240	300	24000	≥70	>0.9	25000	Alu.+Glass	368*411*54	5/0.050/9.5

Movable Work Lights



LG158-H



LG158-L



LG158-D



LG158-D2

   **ErP IP65**

With Tripod-stand , the height 1.5M, and 3*1.0mm² rubber cable 1.5M with plug



 **SMD2835**  **-40°+50°**  **110°**

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/M ³ /KG]
LG158-H	220-240V	20	1800	≥80	>0.5	30000	Alu.	220*65*210	10/0.047/10
LG158-L	220-240V	20	1800	≥80	>0.5	30000	Alu.	240*60*300	5/0.0296/5
LG158-D	220-240V	20	1800	≥80	>0.5	30000	Alu.	650*130*210	2/0.044/5
LG158-D2	220-240V	2*20	3600	≥80	>0.5	30000	Alu.	650*135*215	2/0.044/5.5


Movable Work Lights

IP65

90lm/w



Product Details

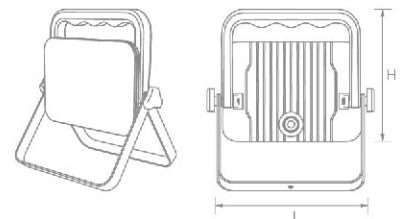

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs/M ³ /KG]
LG168A	100-240V	20	1800	≥70	>0.5	30000	Alu.	/	/
LG168A	100-240V	30	2700	≥70	>0.9	30000	Alu.	/	/



Highbay lamps

LED Highbay Lamps



LUMILEDS

IK08


ANTI-IMPACT

IP65



170lm/w



Optional Accessories

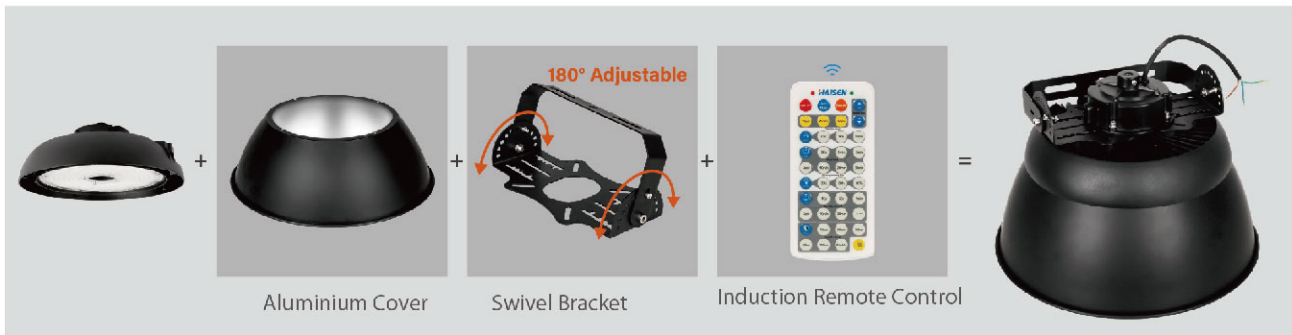

Functions

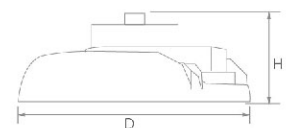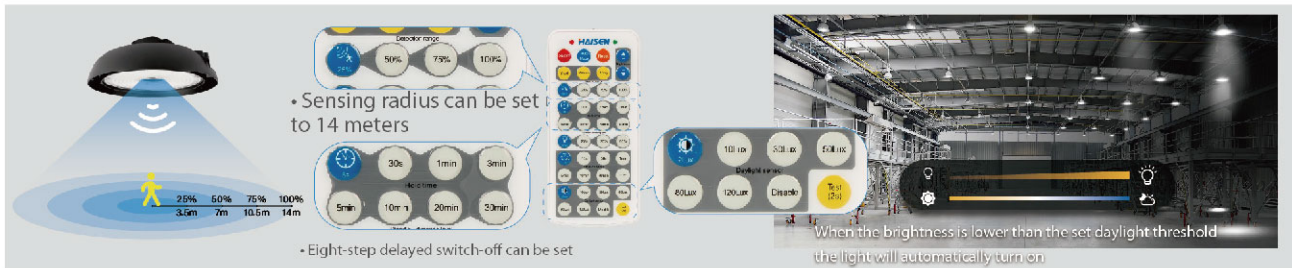

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ² / KG]
HL150	100-277	100	17000	≥70	>0.9	50000	Alu.	Ø258*115	4/0.030/18
HL150	100-277	150	25500	≥70	>0.9	50000	Alu.	Ø298*115	4/0.040/20.7
HL150	100-277	200	34000	≥70	>0.9	50000	Alu.	Ø298*115	4/0.040/20.7

LED Highbay Lamps



SAMSUNG




IP69K

ANTI-IMPACT

170lm/w



Product Features



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ² / KG]
HL305	100-270	100	17000	≥80	>0.95	50000	Alu.+PC	Ø340*120	1/0.025/3.2
HL305	100-270	150	25500	≥80	>0.95	50000	Alu.+PC	Ø340*120	1/0.025/3.2

LED Highbay Lamps





SAMSUNG

IP65



180lm/W



Product Details

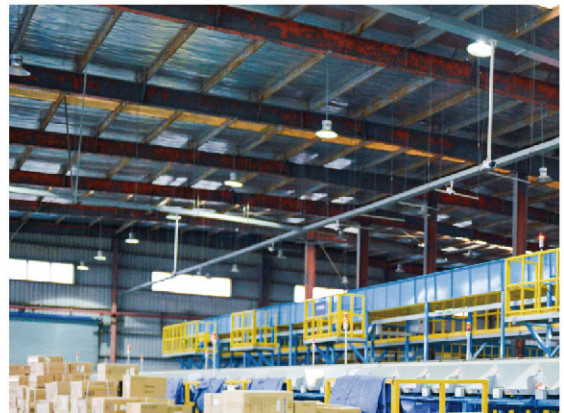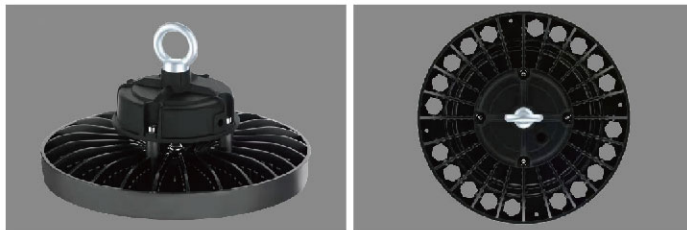

Optional Accessories

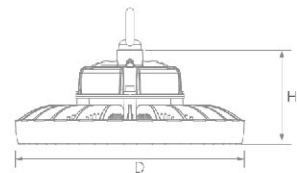

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ³ / KG]
HL151	100-240	100	18000	≥80	>0.9	50000	Alu.+PC	Ø275*53	1/0.004/2.9
HL151	100-240	150	22500	≥80	>0.9	50000	Alu.+PC	Ø319*67	1/0.006/3.6
HL151	100-240	200	36000	≥80	>0.9	50000	Alu.+PC	Ø356*70	1/0.009/4.1

LED Highbay Lamps






LUMILEDS

IP65


140lm/W



Optional lens/Glass

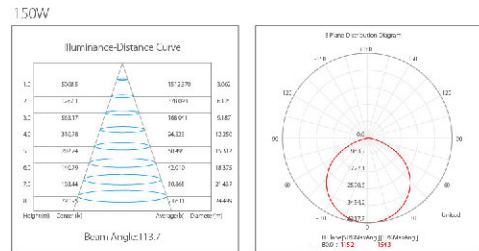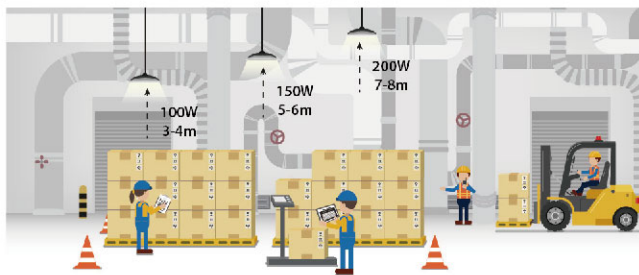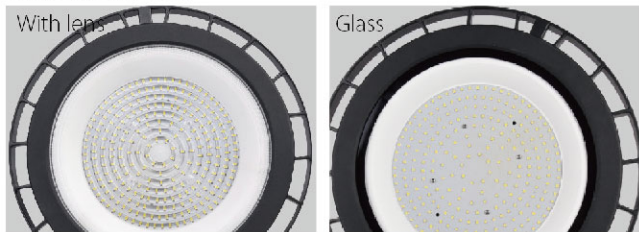

Select products according to your actual need



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ² / KG]
HL118	100-277	100	14000	≥80	>0.9	30000	Alu.+PC	Ø270*107	1/0.04/4.5
HL118	100-277	150	21000	≥80	>0.9	30000	Alu.+PC.	Ø317*108	1/0.04/4.5
HL118	100-277	200	28000	≥80	>0.9	30000	Alu.+PC	Ø365*123	1/0.04/4.5

LED Highbay Lamps

IP65

120lm/W





CE ErP2.0 **2 YR** **WARRANTY**

Product Details

Aluminum Die-casting





High Quality SMD2835 Chips

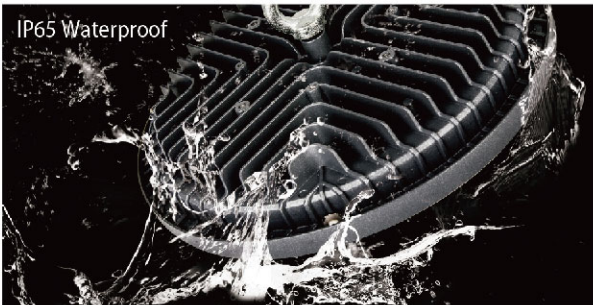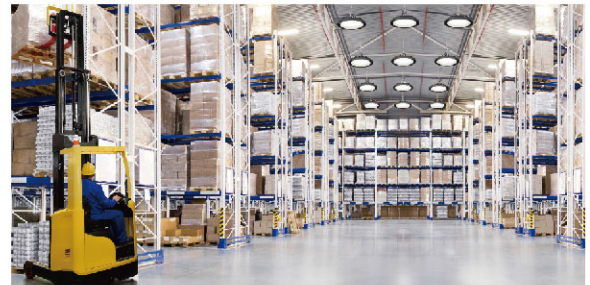

IP65 Waterproof


150W



3000 K 4000 K 6500 K



SMD2835 **-20° +40°** **90°**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ² / KG]
HL120C	220-240	100	14000	≥80	>0.9	30000	Alu.+PC	Ø238*50	6/0.030/8.3
HL120C	220-240	150	21000	≥80	>0.9	30000	Alu.+PC	Ø275*48	6/0.036/10.5
HL120C	220-240	200	28000	≥80	>0.9	30000	Alu.+PC	Ø308*48	6/0.045/13.9

LED Highbay Lamps

IP65

120lm/w



Product Details



 **SMD3030**
 **-40°+50°**
 **110°**

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ² / KG]
HL139	220-240	100	12000	≥80	>0.9	20000	Alu.	Ø300*160	2/0.009/4
HL139	220-240	150	18000	≥80	>0.9	20000	Alu.	Ø350*160	1/0.010/3.5
HL139	220-240	200	24000	≥80	>0.9	20000	Alu.	Ø400*160	1/0.012/5

LED Highbay Lamps

IP65 & Ik08

140lm/w


0-10V DIM

4KV

surge protection




Mounting method

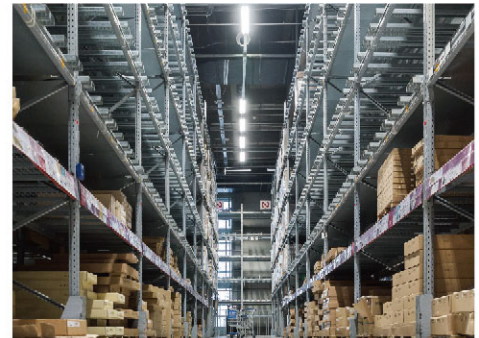


60°/90° Option

60°*90°/80°*150° Option

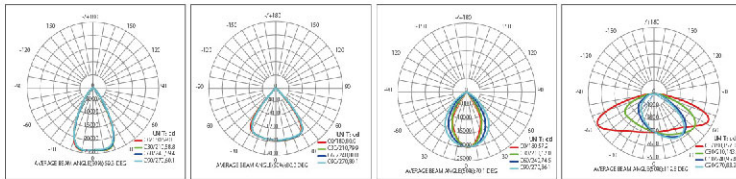

3000 K 4000 K 5000 K 5700 K 6500 K

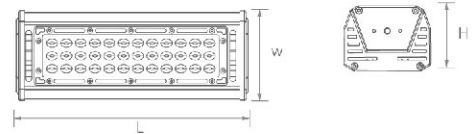

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ² / KG]
HL155	100-277	100	14000	≥80	>0.95	50000	Alu.	578*120*90	1/0.007/8.3
HL155	100-277	150	21000	≥80	>0.95	50000	Alu.	848*120*90	1/0.009/10.5
HL155	100-277	200	28000	≥80	>0.95	50000	Alu.	1118*120*90	1/0.002/13.9
HL155	100-277	300	42000	≥80	>0.95	50000	Alu.	1388*120*90	1/0.016/15.2



Tri-proof Fixtures

Separated Tri-proof Fixtures

IK08

ANTI-IMPACT

IP65

100lm/w





Color Temp.
adjustable





Emergency function
Charging time: 16hours
Working time: 3hours



Product Details

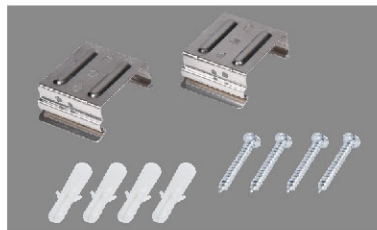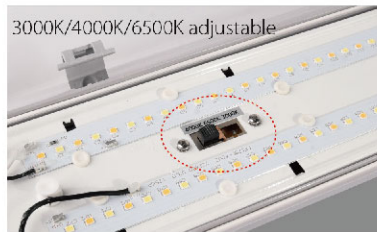

20W



Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.



SMD2835



-20°+40°



120°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF179-20W-CCT	220-240	20	2000	≥80	>0.9	30000	PC	650*105*68	6/0.043/1.2
FF179-40W-EM+CCT	220-240	20/40	4000	≥80	>0.9	30000	PC	1260*105*68	6/0.053/2.2
FF179-40W-TG+CCT	220-240	20/40	4000	≥80	>0.9	30000	PC	1260*105*68	6/0.053/2.2

Separated Tri-proof Fixtures

IK08

ANTI-IMPACT

IP65

130lm/w



Product Details



Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
FF126-C	220-240	21	2700	≥80	>0.9	50000	PC+PC	590*72*61	9/0.08/18.64
FF126-C	220-240	40	5250	≥80	>0.9	50000	PC+PC	1180*72*61	6/0.1/15.25
FF126-C	220-240	55	7150	≥80	>0.9	50000	PC+PC	1480*72*61	6/0.15/19.64

Separated Tri-proof Fixtures

IK08

ANTI-IMPACT

IP65




Product Details



Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.

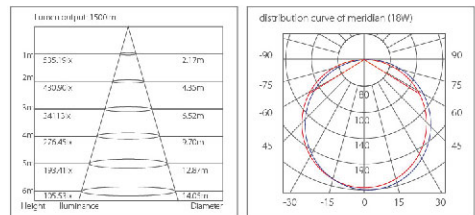

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF125	220-240	18	1440	≥70	>0.5	20000	HIPS+PS	568x70x56	12 / 0.037 / 9.76
FF125	220-240	36	2880	≥70	>0.5	20000	HIPS+PS	1168x70x56	12 / 0.074 / 15.18
FF125	220-240	48	3600	≥70	>0.5	20000	HIPS+PS	1468x70x56	9 / 0.071 / 13.46

Separated Tri-proof Fixtures

IK08

ANTI-IMPACT

IP65





3 CCT adjust

2 power adjust

130lm/w

CE ^{RoHS} ErP2.0

Product Details

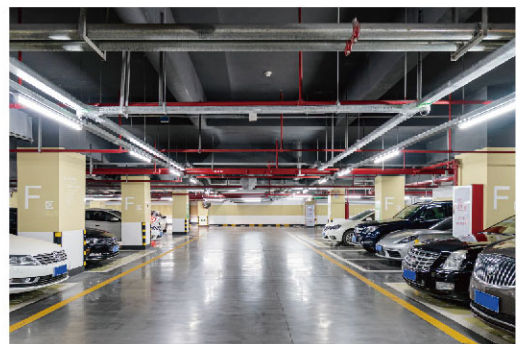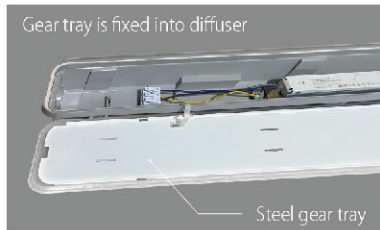

Applications :

Can be applied in application warehouses, car parks, supermarkets, food factory, clean room, marine, etc.

Accessories



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
FF234C	200-240V	20	2600	>80	>0.5	30000	PC	64*10.3*8.4	6 / 0.042 / 9.76
FF234C	200-240V	40	5200	>80	>0.9	30000	PC	124*10.3*8.4	6 / 0.078 / 15.18
FF234C	200-240V	50	6500	>80	>0.9	30000	PC	154*10.3*8.4	6 / 0.096 / 13.46
FF234C	200-240V	60	7800	>80	>0.9	30000	PC	154*10.3*8.4	6 / 0.096 / 13.46
FF234C	200-240V	80	10400	>80	>0.9	30000	PC	184*10.3*8.4	6 / 0.115 / 15.46



Emergency function
Charging time: 16hours
Working time: 3hours

Separated Tri-proof Fixtures

IK08


ANTI-IMPACT

IP65

130lm/w



CE **RoHS** **ErP2.0**

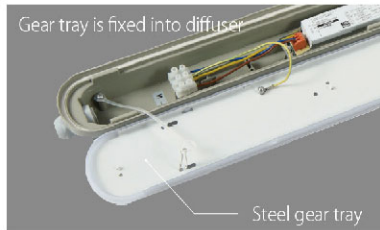

Applications :

Can be applied in application warehouses, car parks, supermarkets, food factory, clean room, marine, etc.

Accessories




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
FF235C	200-240V	18	2340	>80	>0.5	30000	PC	580*76*72	6 / 0.042 / 9.76
FF235C	200-240V	36	4680	>80	>0.9	30000	PC	1165*76*72	6 / 0.078 / 15.18
FF235C	200-240V	50	6500	>80	>0.9	30000	PC	1465*76*72	6 / 0.096 / 13.46


Integrated Tri-proof Fixtures

IP65

140lm/w



3 CCT adjust



2 power adjust




Microwave sensor option




Emergency function option

CE **RoHS** **ErP2.0**


Product Details

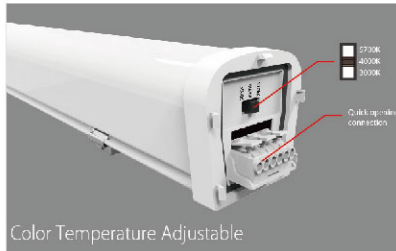

Color Temperature Adjustable

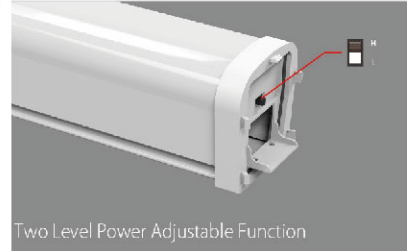

Two Level Power Adjustable Function

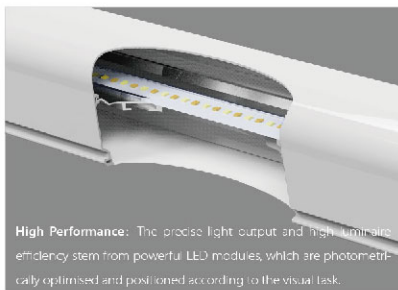

High Performance: The precise light output and high luminaires efficiency stem from powerful LED modules, which are photometrically optimised and positioned according to the visual task.



Energy Efficient: This fixture is instant on at full brightness and puts out from as low as 4200, and to a max of 7000 lumens (50 watts) depending on the wattage and color setting you put the switches at.



SMD2835



-40° +50°



120°

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF223C	220-240	17	2380	≥80	≥0.5	50000	PC	657*70*70	12/0.034/9.16
FF223C	220-240	32	4480	≥80	≥0.9	50000	PC	1257*70*70	9/0.08/11.28
FF223C	220-240	50	7000	≥80	≥0.9	50000	PC	1557*70*70	6/0.07/11.28

Integrated Tri-proof Fixtures

IK06


ANTI-IMPACT

IP69K


140lm/w



Product Details



Applications :
Can be applied in wet interior, dusty place and outdoor places such as Cellars, Sheds, Plant rooms, Warehousees, Open and closed parking areas, Workstations, Corridors, etc.

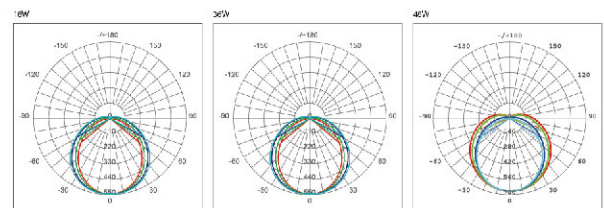

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF138	220-240	18	2430	≥80	>0.9	30000	PC+PMMA	686*74*74	12/0.034/9.16
FF138	220-240	36	5040	≥80	>0.9	30000	PC+PMMA	1281*48*65	9/0.08/11.28
FF138	220-240	48	6720	≥80	>0.9	30000	PC+PMMA	1581*48*65	6/0.07/11.28


Integrated Tri-proof Fixtures

IK08

ANTI-IMPACT

IP65

110lm/w



3 CCT adjust



Tri-Color Temperature



Product Details




Accessories



Applications :

Can be applied in application warehouses, car parks, supermarkets, food factory, clean room, marine, etc.

3000 K 4000 K 6500 K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
FF232C-18	200-240	18	2000	≥80	>0.5	30000	PC	600*53*41	20/0.03/6
FF232C-36	200-240	36	4100	≥80	>0.9	30000	PC	1200*53*41	20/0.05/8.8
FF232C-48	200-240	48	5500	≥80	>0.9	30000	PC	1500*53*41	15/0.63/9.5
FF232C-60	200-240	60	7000	≥80	>0.9	30000	PC	1500*53*41	15/0.63/9.5

Integrated Tri-proof Fixtures

IK08

ANTI-IMPACT

IP65

100lm/w



Quick wiring



One-piece extrusion housing



Accessories



Applications :

Can be applied in application warehouses, car parks, supermarkets, food factory, clean room, marine, etc.



SMD2835



-40°+50°



120°

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF230C-18	220-240	18	1800	≥80	≥0.5	20000	PC	600*75*47	12/0.04/8.7
FF230C-36	220-240	36	3600	≥80	≥0.9	20000	PC	1200*75*47	12/0.07/12.5
FF230C-48	220-240	48	4800	≥80	≥0.9	20000	PC	1500*75*47	12/0.09/14.8

Integrated Tri-proof Fixtures



IK06

ANTI-IMPACT

IP65




Product Details

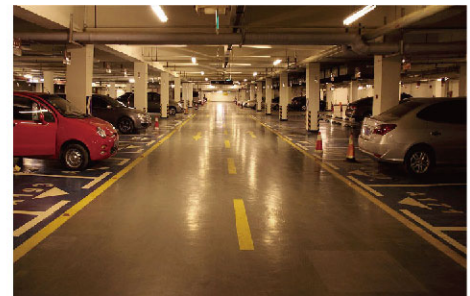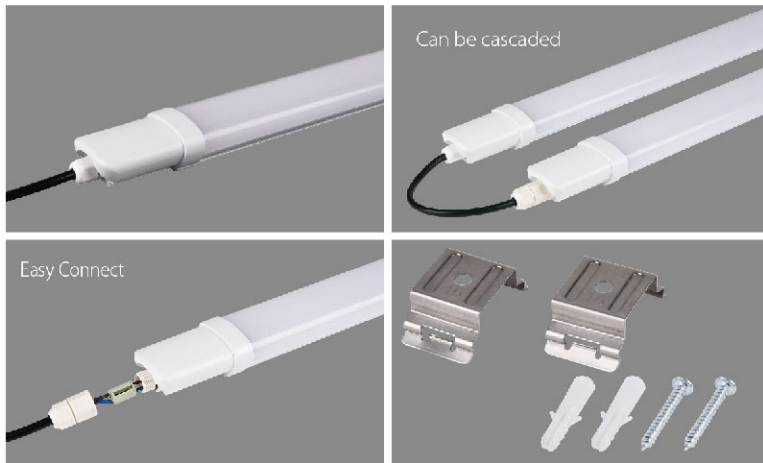

Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.

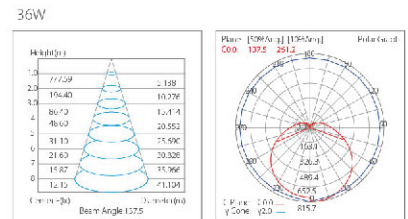

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M³ / KG]
FF115	220-240	18	1600	≥80	>0.9	20000	PC	700*53*35	20 / 0.034 / 7.6
FF115	220-240	36	3500	≥80	>0.9	20000	PC	1230*53*35	20 / 0.058 / 11.4
FF115	220-240	45	4100	≥80	>0.9	20000	PC	1530*53*35	20 / 0.076 / 13.4

Integrated Tri-proof Fixtures

IK06

ANTI-IMPACT





IP65



Economical



Product Details

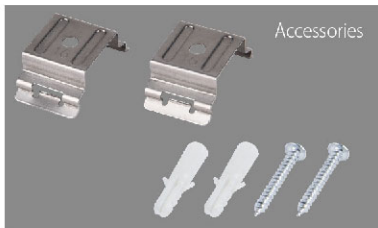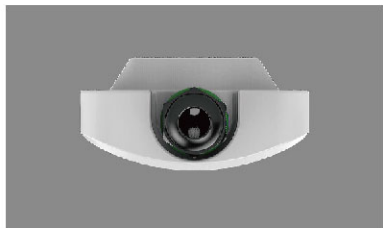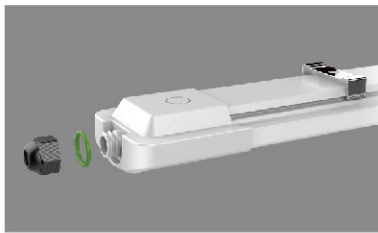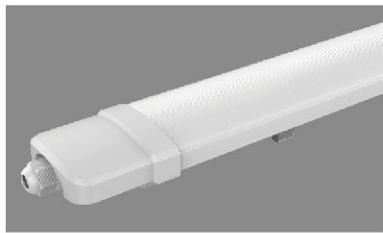

Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.

3000 K 4000 K 6500 K

SMD2835 -20°+40° 120°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
FF118	220-240	18	1600	≥70	>.0.5	20000	PC	600*45*35	20/0.069/10
FF118	220-240	36	3200	≥70	>.0.5	20000	PC	1200*45*35	20/0.103/11
FF118	220-240	45	4000	≥70	>.0.5	20000	PC	1500*45*35	20/0.131/12

Integrated Tri-proof Fixtures

IK06

ANTI-IMPACT



IP65



Economical



Product Details

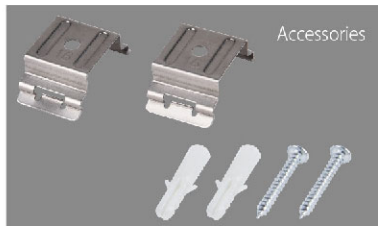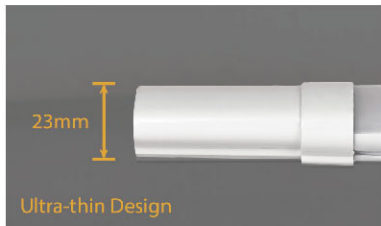

Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.



SMD2835



-20°+40°



120°

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
FF119	220-240	18	1260	≥70	>0.5	20000	PC	600*43*23	20/0.061/10
FF119	220-240	36	2520	≥70	>0.5	20000	PC	1200*43*23	20/0.121 /11
FF119	220-240	45	3150	≥70	>0.5	20000	PC	1500*43*23	20/0.152/12

Integrated Tri-proof Fixtures





IP65

100lm/w



CE RoHS **CB ErP2.0**

Product Details

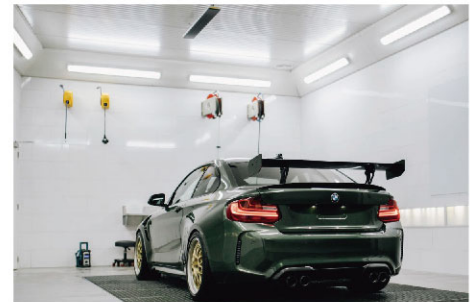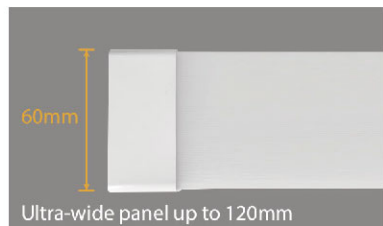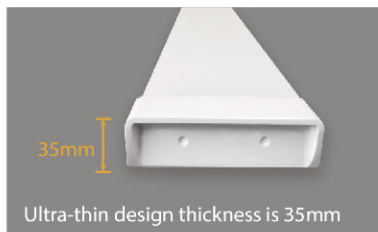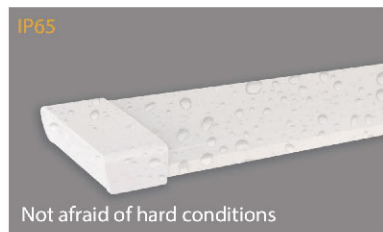

Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.



SMD2835 **-20°+40°** **120°**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
FF228C	220-240	25	2500	≥80	>0.9	30000	PC	600*120*35	12/0.06/6
FF228C	220-240	40	4000	≥80	>0.9	30000	PC	900*120*35	12/0.12/8.8
FF228C	220-240	50	5000	≥80	>0.9	30000	PC	1200*120*35	9/0.11/9.5
FF228C	220-240	80	8000	≥80	>0.9	30000	PC	1500*120*35	9/0.11/9.5

Integrated Tri-proof Fixtures


IP65

120lm/w




CE RoHS **CB ErP2.0**

Product Details

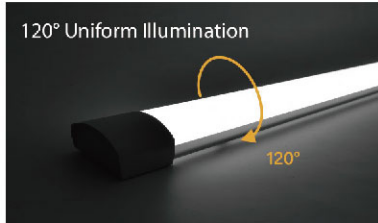

Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.

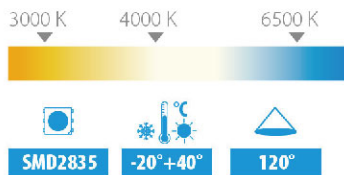

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF227C-10	220-240	10	1200	≥80	>0.92	30000	PC	300*65*30	15/0.03/5
FF227C-18	220-240	18	2160	≥80	>0.92	30000	PC	600*65*30	12/0.06/6
FF227C-30	220-240	30	3600	≥80	>0.92	30000	PC	900*65*30	12/0.12/8.8
FF227C-36	220-240	36	4320	≥80	>0.92	30000	PC	1200*65*30	9/0.11/9.5
FF227C-48	220-240	48	5760	≥80	>0.92	30000	PC	1500*65*30	9/0.11/9.5

Traditional Tri-proof Fixtures

IP65


Only suitable for LED tubes

Economical

CE RoHS **ErP2.0**



Accessories optional

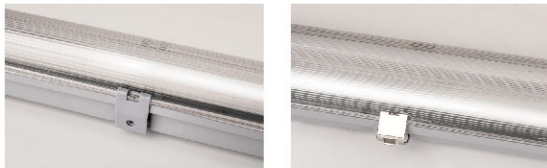


Solid fix with 12 joint snap guarantees better water-proof progress

Details



Multiple Application:

All accessories are included for at least 3 type of application: suspension kit, screw in the ceiling, brackets for easy snap.




Item No.	Voltage [V]	Wattage [W]	Base	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
FF325-9W	220-240	T8 1x9	G13	30000	ABS+PC	650*105*71	12/0.059/8.4
FF325-18W	220-240	T8 1x18	G13	30000	ABS+PC	1260*105*71	9/0.095/6.1
FF325-24W	220-240	T8 1x24	G13	30000	ABS+PC	1560*105*71	9/0.105/7.1
FF325-2*9W	220-240	T8 2x9	G13	30000	ABS+PC	650*105*71	9/0.051/8.5
FF325-2*18W	220-240	T8 2x18	G13	30000	ABS+PC	1260*105*71	6/0.056/10.2
FF325-2*24W	220-240	T8 2x24	G13	30000	ABS+PC	1560*105*71	6/0.073/11.1

Traditional Tri-proof Fixtures

IP54




Details



Lampshade material available





High-quality for more strict usage environment

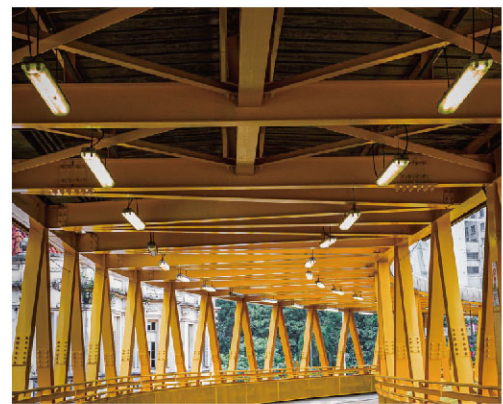

Accessories



* Wiring options available

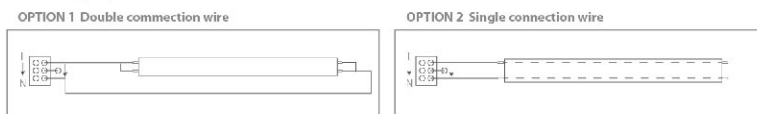



Item No.	Voltage [V]	Wattage [W]	Base	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF326-136	220-240	T8 1x18	G13	30000	HIPS+PS/ABS+PS/ABS+PC	126*8*8	12/0.074/8.4
FF326-236	220-240	T8 2x18	G13	30000	HIPS+PS/ABS+PS/ABS+PC	126*10*8	8/0.084/6.1

Traditional Tri-proof Fixtures

IP65



Product Details

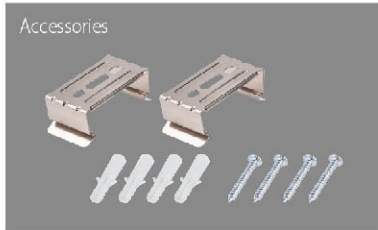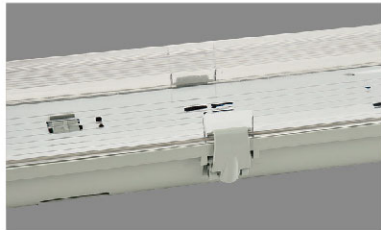

Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.




Item No.	Voltage [V]	Wattage [W]	Base	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF302-109	220-240	T8 1x9	G13	30000	ABS/PC/HIPS+PC/PS	660*60*60	20/0.066/8.4
FF302-118	220-240	T8 1x18	G13	30000	ABS/PC/HIPS+PC/PS	1266*60*60	12/0.075/9.1
FF302-124	220-240	T8 1x24	G13	30000	ABS/PC/HIPS+PC/PS	1566*60*60	12/0.076/9
FF302-209	220-240	T8 2x9	G13	30000	ABS/PC/HIPS+PC/PS	660*100*60	9/0.100/9.9
FF302-218	220-240	T8 2x18	G13	30000	ABS/PC/HIPS+PC/PS	1266*100*60	9/0.094/10.2
FF302-224	220-240	T8 2x24	G13	30000	ABS/PC/HIPS+PC/PS	1566*100*60	9/0.123/11.1

Traditional Tri-proof Fixtures

IP65



Product Details

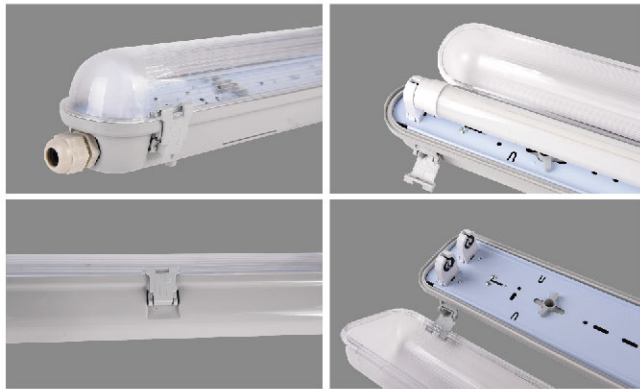


Accessories



Applications :

Can be applied in wet interior, dusty place and outdoor places such as cellars, sheds, plant rooms, warehouses, open and closed parking areas, workstations, corridors, etc.



Item No.	Voltage [V]	Wattage [W]	Base	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
FF321-109	220-240	T8 1x9	G13	30000	ABS/PC/HIPS+PC/PS	660*70*78	15/0.045/8.4
FF321-118	220-240	T8 1x18	G13	30000	ABS/PC/HIPS+PC/PS	1260*70*78	15/0.083/9.0
FF321-124	220-240	T8 1x24	G13	30000	ABS/PC/HIPS+PC/PS	1560*70*78	15/0.103/10.2
FF321-209	220-240	T8 2x9	G13	30000	ABS/PC/HIPS+PC/PS	660*100*78	10/0.042/9.1
FF321-218	220-240	T8 2x18	G13	30000	ABS/PC/HIPS+PC/PS	1260*100*78	10/0.078/9.9
FF321-224	220-240	T8 2x24	G13	30000	ABS/PC/HIPS+PC/PS	1560*100*78	10/0.096/11.1



E 183 03



Fire Emergency Lights

LED Fire Emergency Lights

IP20

Ra≥70



FEL229




FEL231

CE **RoHS**



FEL233

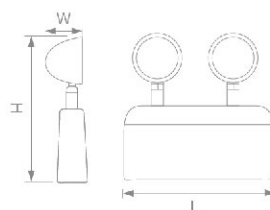

100-240V
≥70
15 000
-10° +40°
120°

Item No.	Wattage [W]	Battery Capacity	Charging hours	Output hours	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
FEL229	2	3.7V 1200MAH Lithium battery	24-48h	3-4h	ABS	135*51*147	20/0.065/13
FEL231	8	3.7V 2200MAH Lithium battery	24-48h	3-5h	ABS	170*40*162	10/0.038/8
FEL233	12	6V4.5AH lead acid battery	24-48h	2h/2 bulb,4h/1bulb	ABS	255*64*230	5/0.031/6

LED Fire Emergency Lights

IP20

Ra≥70



Product Details



FEL206



FEL208



FEL207



FEL228



FEL208&FEL228




FEL208&FEL228



FEL206&FEL207



FEL206&FEL207



- 100-240V**
- ≥70**
- 15 000**
- SMD5050**
- 10°+40°**
- 120°**

Item No.	Wattage [W]	Lumen [lm]	Battery Capacity	Charging hours	Output hours	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
FEL206	4	300	6V 2000mAh Ni-CD	24hours	180min	ABS	260*60*105	10 / 0.063 / 8.5
FEL207	4.8	350	4V 2000mAh Ni-CD	24hours	180min	ABS	315*140*100	10 / 0.057 / 8.5
FEL208	4	300	4V 2000mAh Ni-CD	24hours	300min	ABS	350*105*80	8 / 0.074 / 11.5
FEL228	2	180	4V 1000mAh VRLA	24hours	90min	ABS	275*68*280	10 / 0.076 / 15

LED Fire Emergency Lights

IP20

Ra≥70



FEL201



FEL202




FEL322



FEL288



Product Details



Item No.	Wattage [W]	Lumen [lm]	Battery Capacity	Charging hours	Output hours	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
FEL201	2.4	200	4V 2000mAh Ni-CD	17-24hours	90min	ABS	260*60*105	10 / 0.024 / 6.35
FEL202	4	300	6V 2000mAh Ni-CD	17-24hours	90min	ABS	315*140*100	10 / 0.024 / 6.4
FEL322	2	200	4V 1600mAh Ni-CD	17-24hours	120min	ABS	258*115*68	8 / 0.038 / 6.6
FEL288	3.2	200	4V 2000mAh Ni-CD	15-24hours	120min	ABS	260*105*60	10 / 0.024 / 6.4

LED Fire Emergency Lights



FEL110



FEL112



FEL111




FEL109




FEL113

Product Details

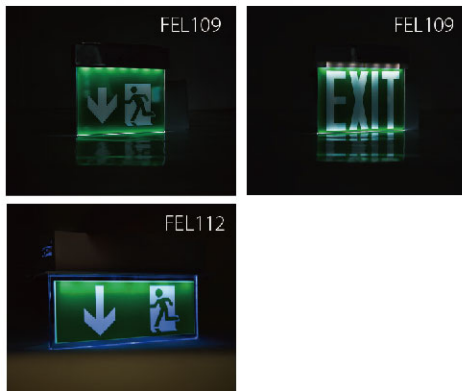

Optional

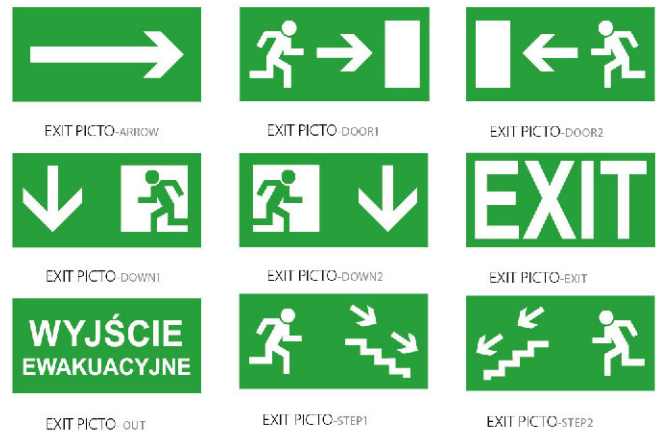

Item No.	Battery Capacity	Charging hours	Output hours	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
FEL109	3.6V 500mAh Ni-cd Battery	24hours	90min	ABS+PMMA	260*225*27	20 / 0.144 / 10
FEL110	1.2V 800mAh Ni-cd Battery	24hours	180min	Alu.+ABS	360*180*31	10 / 0.033 / 7.7
FEL111	3.7V 2200mAh lithium Battery	24hours	180min	Alu.+ABS	350*90*236	10 / 0.044 / 8.5
FEL112	1.2V 800mAh Ni-cd Battery	24hours	90min	Alu.+PMMA	380*210*50	10 / 0.051 / 8
FEL113	1.2V 800mAh Ni-cd Battery	24hours	180min	ABS	274*170*176	10 / 0.058 / 5.5

LED Fire Emergency Lights

IP20



FEL101



FEL510



Product Details



Optional



EXIT PICTO-ARROW



EXIT PICTO-DOOR1



EXIT PICTO-DOOR2



EXIT PICTO-DOWN1



EXIT PICTO-DOWN2




EXIT PICTO-EXIT



EXIT PICTO-OUT



EXIT PICTO-STEP1



EXIT PICTO-STEP2



Item No.	Battery Capacity	Charging hours	Output hours	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
FEL101	1.2V 800mAh Ni-cd Battery	24hours	90min	Alu.+Glass	360*150*25	20 / 0.041/ 10
FEL510	1.2V 600mAh Ni-cd Battery	24hours	120min	Alu.+Glass	360*150*25	20 / 0.041/ 10