

LED Lighting Catalogue

Courtyard & Outdoor Lights 2022



ERIK C[®]
concepts

LED Landscape Lamps



Wall Washer




IP67

CORROSION PROOF

LUMILEDS



Product details

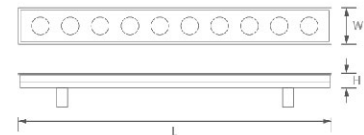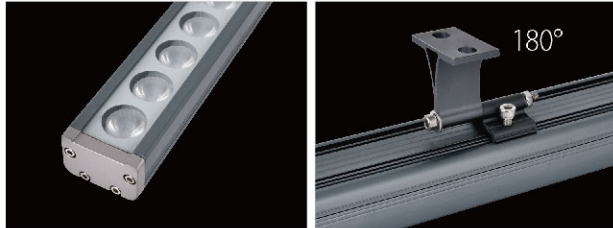

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	LED Type	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WW236-12W	85-265	12	840	3030	>70	≥0.5	20000	Alu.+Glass	44*62*L500	9/0.037/10
WW236-18W	85-265	18	1260	3030	>70	≥0.5	20000	Alu.+Glass	44*62*L500	9/0.037/10
WW236-18W	85-265	18	1260	3030	>70	≥0.5	20000	Alu.+Glass	44*62*L1000	9/0.058/18
WW236-24W	85-265	24	1680	3030	>70	≥0.5	20000	Alu.+Glass	44*62*L1000	9/0.58/18
WW236-36W	85-265	36	2520	3030	>70	≥0.5	20000	Alu.+Glass	44*62*L1000	9/0.058/18

Wall Washer



Linear lighting Structural Waterproofing

IP65

CORROSION PROOF



Product details

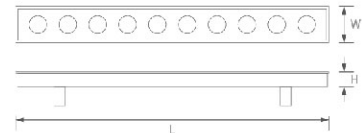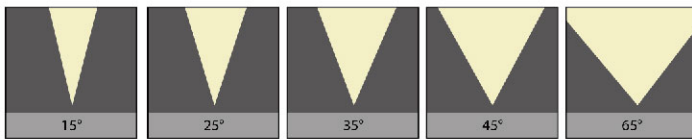

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	LED Type	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WW133-9W	100-240	9	630	High power	≥70	>0.9	30000	Alu.+Glass	300*55*60	9/0.015/6.5
WW133-18W	100-240	18	1260	High power	≥70	>0.9	30000	Alu.+Glass	500*55*60	9/0.024/10
WW133-24W	100-240	24	1680	High power	≥70	>0.9	30000	Alu.+Glass	1000*55*60	9/0.045/20
WW133-30W	100-240	30	2100	High power	≥70	>0.9	30000	Alu.+Glass	1000*55*60	9/0.045/20
WW133-36W	100-240	36	2520	High power	≥70	>0.9	30000	Alu.+Glass	1000*55*60	9/0.045/20



Inground & Underwater Lamps


Inground Lamps

IK10

ANTI-IMPACT

IP67


CORROSION PROOF



LOAD-BEARING
2000 Kg




Product details

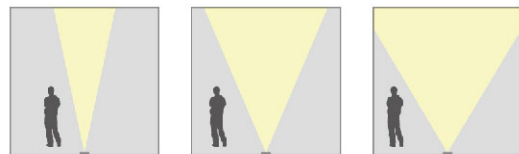


Symmetrische Linse 25°

Symmetrische Linse 45°

Symmetrische Linse 60°

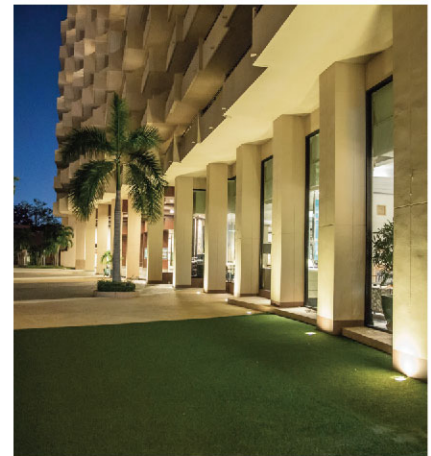

3000 K 4000 K 5000 K




Epistar chip



-20°+50°



25°/45°/60°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*Hmm]	Hole Size [D*Hmm]	Packing [Pcs/m ³ /KG]
IL120-3W	100-240	3x1	250	≥70	>0.4	50000	Stainless steel+Alu.	Ø110*140	Ø100*155	20/0.048/17
IL120-6W	100-240	6x1	500	≥70	>0.4	50000	Stainless steel+Alu.	Ø150*130	Ø140*145	12/0.045/17
IL120-9W	100-240	9x1	800	≥70	>0.9	50000	Stainless steel+Alu.	Ø150*130	Ø140*145	12/0.045/17
IL120-12W	100-240	12x1	1000	≥70	>0.9	50000	Stainless steel+Alu.	Ø150*130	Ø140*145	12/0.045/17
IL120-18W	100-240	18x1	2000	≥70	>0.9	50000	Stainless steel+Alu.	Ø180*265	Ø170*280	4/0.044/15


Inground Lamps

IK08
ANTI-IMPACT



IP67
CORROSION PROOF



Product details

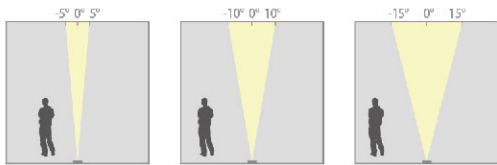

Symmetrische Linse 10° Symmetrische Linse 20° Symmetrische Linse 30°

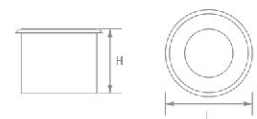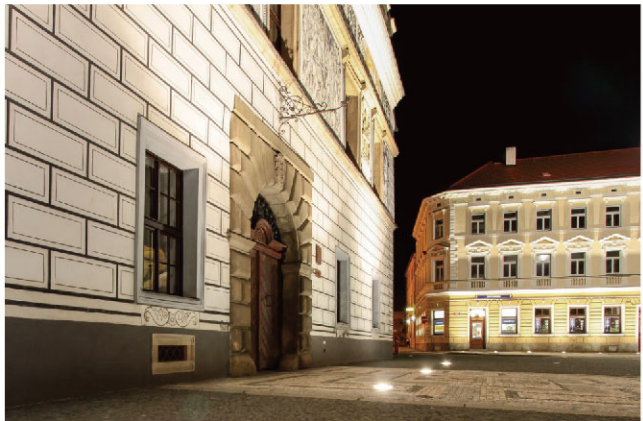

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*H*mm]	Hole Size [D*H*mm]	Packing [Pcs/m ² /KG]
IL110-4.5W	100-240	4.5	300	≥65	>0.5	50000	Alu.+PC	Ø65*56	Ø55*65	50/0.026/16.5
IL110-10W	100-240	10	420	≥65	>0.5	50000	Alu.+PC	Ø78*85	Ø68*95	30/0.034/16.3
IL110-30W	100-240	30	650	≥65	>0.9	50000	Alu.+PC	Ø100*140	Ø90*150	16/0.046/13.6

Inground Lamps

Epistar


Chip

IK10

ANTI-IMPACT

IP67

CORROSION PROOF



LOAD-BEARING
2000 Kg



Product details

RGB



3000 K 4000 K 5000 K





Epistar chip



-20°+40°



8/15/35/45°

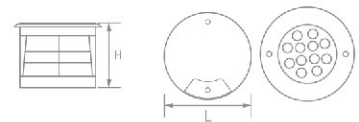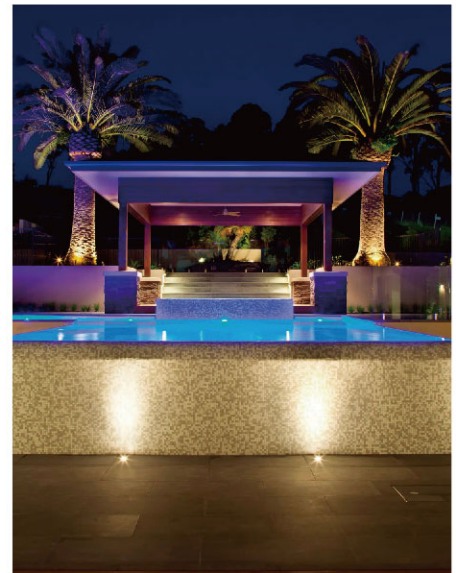


Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*H:mm]	Hole Size [D'H:mm]	Packing [Pcs/m²/KG]
IL103	100-240	3	180	≥65	>0.5	30000	Stainless steel+Alu.+PC	Ø100*108	Ø90*115	20/0.021/14
IL103	100-240	5	300	≥65	>0.5	30000	Stainless steel+Alu.+PC	Ø130*98	Ø120*105	18/0.024/19.5
IL103	100-240	6	360	≥65	>0.5	30000	Stainless steel+Alu.+PC	Ø130*98	Ø120*105	18/0.024/19.5
IL103	100-240	9	540	≥65	>0.5	30000	Stainless steel+Alu.+PC	Ø160*110	Ø145*115	12/0.031/19.5
IL103	100-240	12	720	≥65	>0.5	30000	Stainless steel+Alu.+PC	Ø180*120	Ø170*135	8/0.035/17.5
IL103	100-240	15	1050	≥65	>0.5	30000	Stainless steel+Alu.+PC	Ø230*140	Ø220*150	6/0.035/19.5
IL103	100-240	18	1500	≥65	>0.5	30000	Stainless steel+Alu.+PC	Ø260*120	Ø250*135	6/0.031/19.5
IL103	100-240	24	2200	≥65	>0.5	30000	Stainless steel+Alu.+PC	Ø320*110	Ø330*120	4/0.034/21.5

Inground Lamps



IK10
ANTI-IMPACT

IP67
CORROSION PROOF






LOAD-BEARING
2000 Kg



SPOTLIGHT



Product details

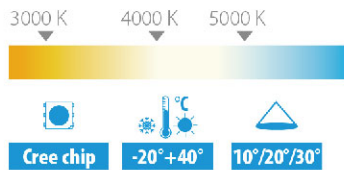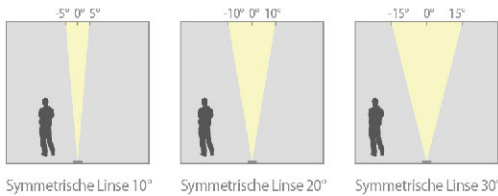

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*Hmm]	Hole Size [D'Hmm]	Packing [Pcs/m ³ /KG]
IL104-5W	100-240	5	300	≥65	>0.5	50000	Stainless steel+Alu.+PC	Ø100*108	Ø90*115	20/0.031/14
IL104-7W	100-240	7	420	≥65	>0.5	50000	Stainless steel+Alu.+PC	Ø130*98	Ø120*105	18/0.043/19.5
IL104-10W	100-240	10	650	≥65	>0.5	50000	Stainless steel+Alu.+PC	Ø160*110	Ø145*120	12/0.049/19.5
IL104-20W	100-240	20	1300	≥65	>0.5	50000	Stainless steel+Alu.+PC	Ø210*120	Ø200*130	8/0.057/19.5
IL104-30W	100-240	30	1900	≥65	>0.9	50000	Stainless steel+Alu.+PC	Ø230*140	Ø220*150	6/0.055/19.5
IL104-35W	100-240	35	2200	≥65	>0.9	50000	Stainless steel+Alu.+PC	Ø260*120	Ø250*135	6/0.064/19.5

Solar Floodlights




Poly solar panel



IP65



Color Temp.

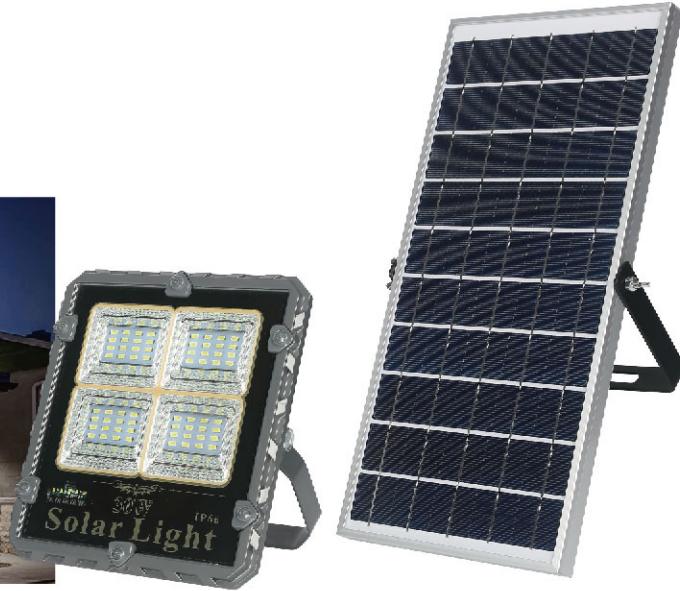


LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

SFL1322A-30W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	360lm	70PCS	5V/12W	360*172*17mm	3.2V 5.5Ah	200*180*42mm
SFL1322A-60W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	720lm	84PCS	5V/18W	340*290*17mm	3.2V 11Ah	228*196*45mm
SFL1322A-100W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1080lm	120PCS	5V/25W	385*340*17mm	3.2V 16.5Ah	270*237*45mm
SFL1322A-200W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1500lm	240PCS	5V/35W	520*350*17mm	3.2V 27.5Ah	318*288*50mm
SFL1322A-300W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1740lm	360PCS	5V/40W	630*350*17mm	3.2V 33Ah	385*350*55mm

Inground Lamps

Epistar

Chip

IK10

ANTI-IMPACT

IP67


CORROSION PROOF




DRIVE-OVER
2000 Kg



Product details

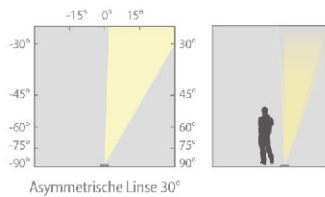

Dimming
Angle 15°




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Life Time [H]	Size [D*H:mm]	Hole Size [D*H:mm]	Packing [Pcs/m ² /KG]
IL108-3W	100-240	3	300	≥80	>0.5	Stainless steel+Alu.+PC	50000	Ø150*215	Ø145*220	12/0.094/1.63
IL108-9W	100-240	9	650	≥80	>0.5	Stainless steel+Alu.+PC	50000	Ø210*270	Ø205*280	6/0.092/3.35
IL108-12W	100-240	12	850	≥80	>0.5	Stainless steel+Alu.+PC	50000	Ø230*285	Ø220*290	6/0.109/4.15
IL108-18W	100-240	18	950	≥80	>0.5	Stainless steel+Alu.+PC	50000	Ø260*325	Ø250*330	4/0.120/5.58

Inground Lamps

IK10
ANTI-IMPACT

IP67
CORROSION PROOF


Adjustable $\pm 15^\circ$



LOAD-BEARING
2000 Kg


Adjustable
angle




Product details



Accessories

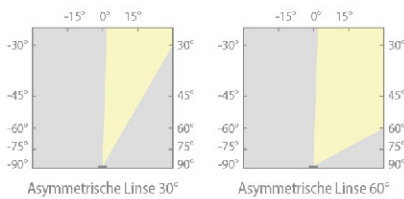

 **Epistar chip**  **-20°+50°**  **30°/60°**




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Life Time [H]	Size [D*Hmm]	Hole Size [D*Hmm]	Packing [Pcs/m ² /KG]
IL6101-3W	85-265	3	100	≥70	>0.5	Stainless steel+Alu.	50000	Ø130*135	Ø127*135	12/0.040/16.8
IL6101-4.5W	85-265	3x1.5	100	≥70	>0.5	Stainless steel+Alu.	50000	Ø150*160	Ø140*160	12/0.089/27.6

Inground Lamps



IK10
ANTI-IMPACT



IP68
CORROSION PROOF





LOAD-BEARING
2000 Kg



Product details



Symmetrische Linse 30° Symmetrische Linse 60°

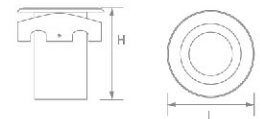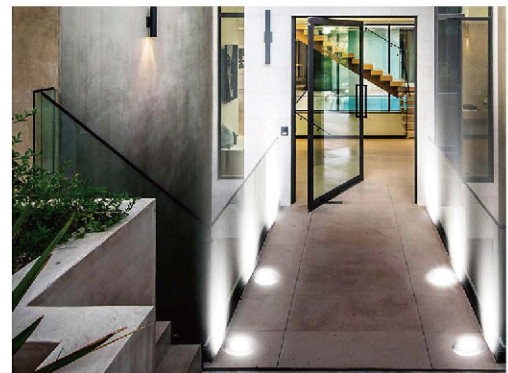

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Life Time [H]	Size [D*H:mm]	Hole Size [D*H:mm]	Packing [Pcs/m ² /KG]
IL135	110-130	1	30	≥70	>0.5	Stainless steel+Alu.	20000	Ø63*73	Ø50*75	20/0.012/6

Inground Lamps

IK10


ANTI-IMPACT

IP65

CORROSION PROOF



2700 K 4000 K 6500 K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Life Time [H]	Size [D*Hmm]	Hole Size [D*Hmm]	Packing [Pcs/m ² /KG]
IL1033-3W	85-265	3	210	≥70	>0.5	Stainless steel+Alu.	20000	Ø65*60	Ø60*65	12/0.040/16.8

IK10


ANTI-IMPACT

IP65

CORROSION PROOF



2700 K 4000 K 6500 K




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Life Time [H]	Size [D*Hmm]	Hole Size [D*Hmm]	Packing [Pcs/m ² /KG]
IL1032-7W	85-265	7W	390	≥70	>0.5	Stainless steel+Alu.	20000	Ø120*90	Ø115*90	18/0.041/13
IL1032-12W	85-265	12W	660	≥70	>0.5	Stainless steel+Alu.	20000	Ø180*90	Ø165*90	8/0.033/11
IL1032-24W	85-265	24W	1350	≥70	>0.5	Stainless steel+Alu.	20000	Ø220*95	Ø210*95	10/0.058/24
IL1032-36W	85-265	36W	2000	≥70	>0.5	Stainless steel+Alu.	20000	Ø300*90	Ø290*95	6/0.064/24

Inground Lamps




GU10



Item No.	Voltage [V]	Base	Material	Life Time [H]	Size [D*Hmm]	Hole Size [D*Hmm]	Packing [Pcs/m ² /KG]
IL110	85-265	GU10	Stainless steel+Alu.	20000	Ø130*135	Ø120*H140	30/0.067/10



GU10




Item No.	Voltage [V]	Base	Material	Life Time [H]	Size [D*Hmm]	Hole Size [D*Hmm]	Packing [Pcs/m ² /KG]
IL238	85-265	GU10	Stainless steel+Alu.	20000	Ø130*135	Ø120*140	18/0.037/10.5

Inground Lamps



IK10
ANTI-IMPACT


IP67
CORROSION PROOF



LOAD-BEARING
2000 Kg



Product details

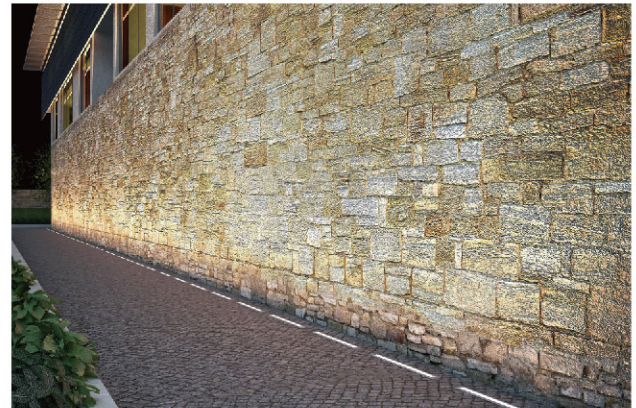

SMD2835



-20°+40°



15°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
IL150-3W	100-240	3	120	≥80	>0.5	30000	Stainless steel+Alu.	230*90*105	24/0.027/12.0
IL150-5W	100-240	5	300	≥80	>0.5	30000	Stainless steel+Alu.	300*90*105	12/0.024/8.4
IL150-8W	100-240	8	480	≥80	>0.5	30000	Stainless steel+Alu.	500*90*105	12/0.059/13.2
IL150-12W	100-240	12	720	≥80	>0.5	30000	Stainless steel+Alu.	600*90*105	12/0.062/14.5
IL150-15W	100-240	15	900	≥80	>0.5	30000	Stainless steel+Alu.	800*90*105	12/0.065/15.7
IL150-18W	100-240	18	1080	≥80	>0.5	30000	Stainless steel+Alu.	1000*90*105	6/0.071/13.8

Auxiliary Inground Lamps




IK10
ANTI-IMPACT


IP65
CORROSION PROOF




Product details



IL112R-A IL112R-B IL112R-C IL112R-D



IL112S-A IL112S-B IL112S-C IL112S-D

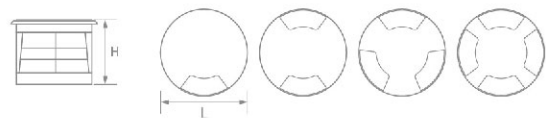

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*H:mm]	Hole Size [D*H:mm]	Packing [Pcs/m ² /KG]
IL112R-A	100-240	3	180	≥70	>0.5	20000	Die-casting Aluminum	Ø52*100	Ø45*110	100/0.036/15.9
IL112R-B	100-240	3	180	≥70	>0.5	20000	Die-casting Aluminum	Ø52*100	Ø45*110	100/0.036/15.9
IL112R-C	100-240	3	180	≥70	>0.5	20000	Die-casting Aluminum	Ø52*100	Ø45*110	100/0.036/15.9
IL112R-D	100-240	3	180	≥70	>0.5	20000	Die-casting Aluminum	Ø52*100	Ø45*110	100/0.036/15.9
IL112S-A	100-240	3	180	≥70	>0.5	20000	Die-casting Aluminum	52*52*100	45*45*110	100/0.036/16.3
IL112S-B	100-240	3	180	≥70	>0.5	20000	Die-casting Aluminum	52*52*100	45*45*110	100/0.036/16.3
IL112S-C	100-240	3	180	≥70	>0.5	20000	Die-casting Aluminum	52*52*100	45*45*110	100/0.036/16.3
IL112S-D	100-240	3	180	≥70	>0.5	20000	Die-casting Aluminum	52*52*100	45*45*110	100/0.036/16.3

Underwater Lamps

Epistar

IP68

CORROSION PROOF



RGB



3000 K 4000 K 6500 K




Epistar chip



-20° +40°



8° 15° 30°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*Hmm]	Packing [Pcs/m ³ /KG]
IL301-3W	DC12	3x1	180	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø95x80	36/0.048/25
IL301-3W-RGB	DC12	3x1	/	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø95x80	36/0.048/25
IL301-6W	DC12	6x1	300	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø145x85	36/0.048/22
IL301-6W-RGB	DC12	6x1	/	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø145x85	36/0.048/22
IL301-9W	DC12	9x1	540	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø170x80	16/0.042/20
IL301-9W-RGB	DC12	9x1	/	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø170x80	16/0.042/20
IL301-12W	DC12	12x1	720	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø190x80	8/0.034/14
IL301-12W-RGB	DC12	12x1	/	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø190x80	8/0.034/14
IL301-18W	DC12	18x1	1080	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø210x90	8/0.045/18
IL301-18W-RGB	DC12	18x1	/	≥80	>0.5	20000	304#Stainless Steel+Glass	Ø210x90	8/0.045/18


Underwater Lamps

IP68

CORROSION PROOF



 **Epistar chip**
 **-20°+40°**
 **30°**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*Hmm]	Packing [Pcs/m ³ /KG]
IL247-3W	AC/DC12V	3	180	≥ 80	>0.5	20000	304#Stainless Steel+Glass	Ø82*H150mm	45/0.052/18.55
IL247-6W	AC/DC12V	6	360	≥ 80	>0.5	20000	304#Stainless Steel+Glass	Ø120*H155	16/0.045/16
IL247-9W	AC/DC12-24V	9	540	≥ 80	>0.5	20000	304#Stainless Steel+Glass	Ø145*H140	14/0.051/16
IL247-12W	AC/DC12-24V	12	720	≥ 80	>0.5	20000	304#Stainless Steel+Glass	Ø160*H140	12/0.075/21
IL247-18W	AC/DC12-24V	18	2160	≥ 80	>0.5	20000	304#Stainless Steel+Glass	Ø190*H210	12/0.075/21

Underwater Lamps




Optional Remote Control



RGB



 **Epistar chip**
 **-20°+40°**
 **30°**



Item No.	Voltage [V]	Wattage [W]	Control	PF	Life Time [H]	Material	Size [D*Hmm]	Packing [Pcs/m ³ /KG]
IL248-3W	AC12	3	Automatic	>0.5	20000	304#Stainless Steel+Glass	Ø80*H150	45/0.052/18.55
IL248-3W-RGB	AC12	3	Remote	>0.5	20000	304#Stainless Steel+Glass	Ø80*H150	45/0.052/18.55
IL248-6W	AC12	6	Automatic	>0.5	20000	304#Stainless Steel+Glass	Ø120*H155	16/0.045/16
IL248-6W-RGB	AC12	6	Remote	>0.5	20000	304#Stainless Steel+Glass	Ø120*H155	16/0.045/16
IL248-9W	AC12	9	Automatic	>0.5	20000	304#Stainless Steel+Glass	Ø145*H140	14/0.051/16
IL248-9W-RGB	AC12	9	Remote	>0.5	20000	304#Stainless Steel+Glass	Ø145*H140	14/0.051/16



Lawn Lamps & Pin Lamps

Garden Lights

OSRAM

IP65

CORROSION PROOF

Available color

Black Dark Grey Silver Grey




UR1071

UR1072

UR1073

UR1074

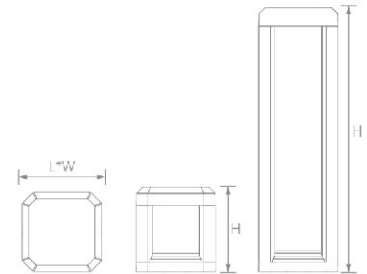

Item No.	Voltage (V)	Wattage (W)	Lumen (lm)	Ra	PF	Life Time (H)	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
UR1071	100-130/220-240	13	1000	≥80	>0.5	30000	Alu.+PC	150*150*160	8/0.042/10.6
UR1072	100-130/220-240	13	1000	≥80	>0.5	30000	Alu.+PC	150*150*300	8/0.052/14.6
UR1073	100-130/220-240	13	1000	≥80	>0.5	30000	Alu.+PC	150*150*500	4/0.048/10
UR1074	100-130/220-240	13	1000	≥80	>0.5	30000	Alu.+PC	150*150*800	4/0.096/13

Garden Lights


OSRAM

IP54

CORROSION PROOF

Available color

Black Dark Grey Silver Grey

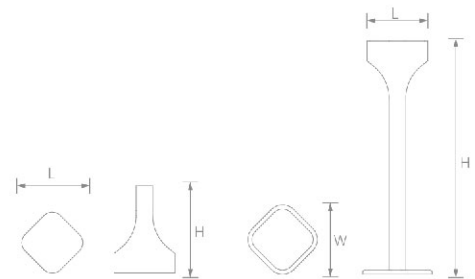

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
UR1081	100-130/220-240	11	500	≥80	>0.5	30000	Alu.+PC	147*147*210	8/0.039/10.6
UR1082	100-130/220-240	11	500	≥80	>0.5	30000	Alu.+PC	166*166*300	8/0.059/14.6
UR1083	100-130/220-240	11	500	≥80	>0.5	30000	Alu.+PC	166*166*500	4/0.068/10
UR1084	100-130/220-240	11	500	≥80	>0.5	30000	Alu.+PC	166*166*800	4/0.075/13

Garden Lights

IP65

CORROSION PROOF

Available color

Black Dark Grey Silver Grey



UR1012




UR1013



UR1022



UR1023

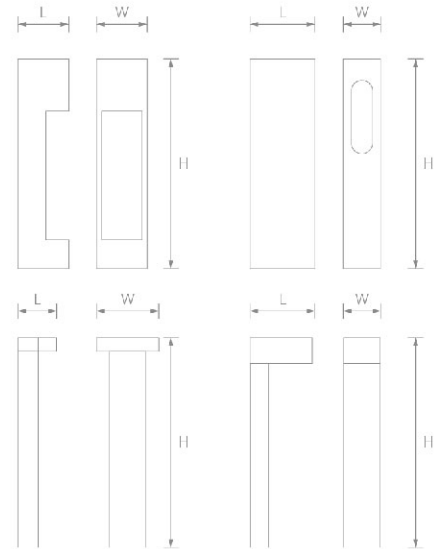

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
UR1012	100-130/220-240	7	560	≥80	>0.5	30000	Alu.	93*93*600	12/0.129/19.5
UR1013	100-130/220-240	7	560	≥80	>0.5	30000	Alu.	116*72*600	12/0.129/19.8
UR1022	100-130/220-240	7	560	≥80	>0.5	30000	Alu.	80*160*600	6/0.121/12.5
UR1023	100-130/220-240	7	560	≥80	>0.5	30000	Alu.	86*100*600	12/0.129/22.2

Garden Lights

E27/B22

IP44

CORROSION PROOF

Available color

Black Dark Grey Silver Grey



UR2061





UR2062



UR2063



UR2064

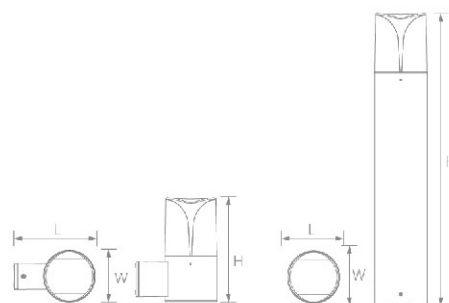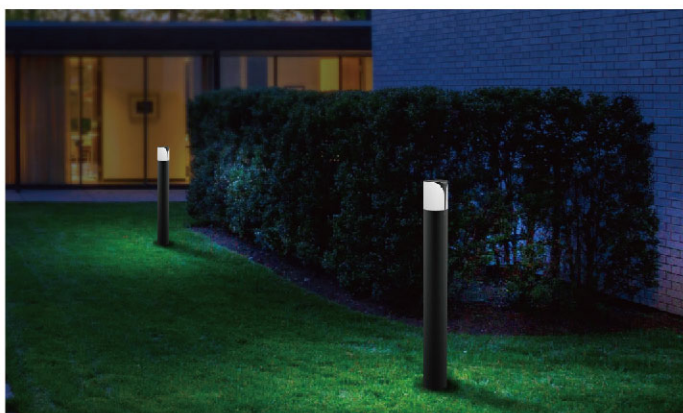

Item No.	Voltage [V]	Wattage [W]	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
UR2061	100-240	E27/Max.23	30000	Alu.+PC	141*90*180	8/0.028/10.6
UR2062	100-240	E27/Max.23	30000	Alu.+PC	90*90*300	9/0.036/14.6
UR2063	100-240	E27/Max.23	30000	Alu.+PC	90*90*500	9/0.058/16.6
UR2064	100-240	E27/Max.23	30000	Alu.+PC	90*90*800	9/0.09/18.6

Garden Lights


E27/B22

IP44

CORROSION PROOF

Available color

Black Dark Grey Silver Grey

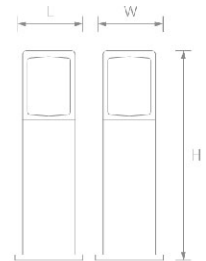


Item No.	Voltage [V]	Wattage [W]	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
UR1009	100-240	E27/Max.23	30000	Alu.+PMMA	90*90*300	9/0.036/14.6
UR1009	100-240	E27/Max.23	30000	Alu.+PMMA	90*90*500	9/0.058/16.6
UR1009	100-240	E27/Max.23	30000	Alu.+PMMA	90*90*800	9/0.090/18.6



White / Black
Alu + PC
max. 10
Packing
UR3006/07

Palace Lamps

Modern Palace Lamps

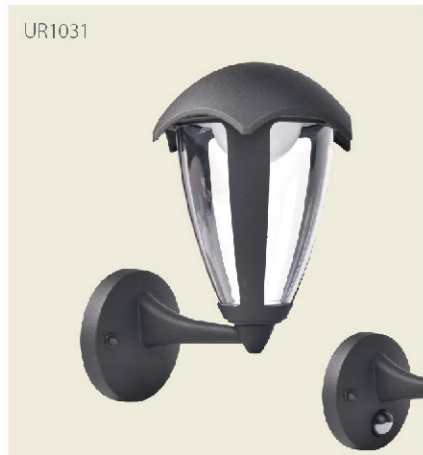

UR1031



White / Black / Grey


Alu. + PC

8W 640lm

Packing [Pcs/m³/KG]

UR1031: 6/0.115/6

CE IP54

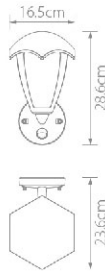

UR1032



White / Black / Grey



Alu. + PC

8W 640lm

Packing [Pcs/m³/KG]

UR1032: 6/0.083/6

CE IP54

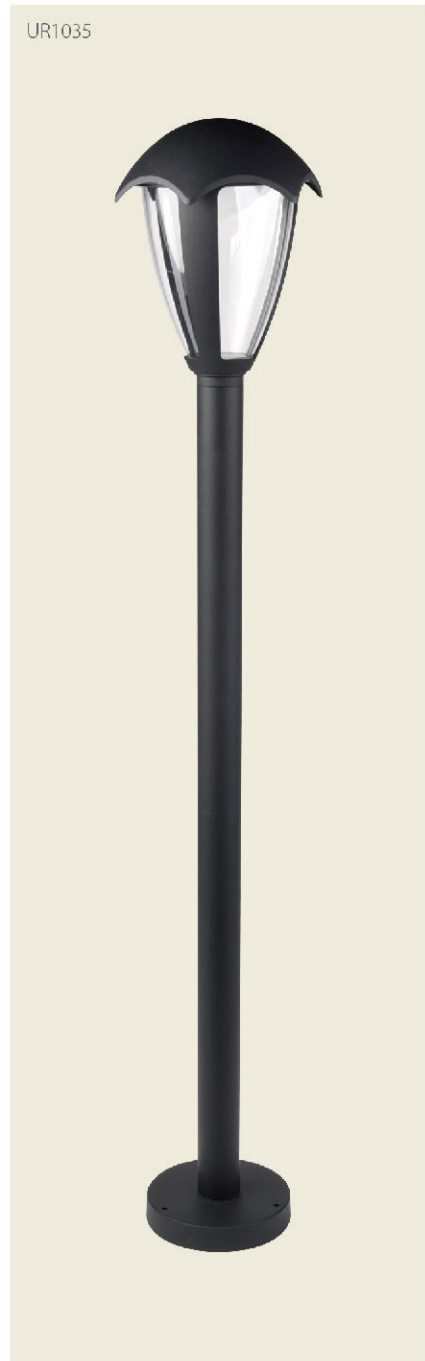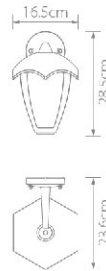

UR1035



White / Black / Grey


Alu. + PC

8W 640lm

Packing [Pcs/m³/KG]

UR1035: 4/0.078/5.5

CE IP54

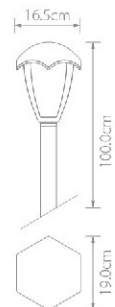

UR1033



White / Black / Grey


Alu. + PC

8W 640lm

Packing [Pcs/m³/KG]

UR1033: 4/0.063/4

CE IP54

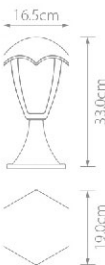

UR1034



White / Black / Grey

Alu. + PC

8W 640lm

Packing [Pcs/m³/KG]

UR1034: 4/0.063/4

CE IP54



Modern Palace Lamps




White / Black / Grey

Alu. + PC

7W 290lm

Packing [Pcs/m³/KG]

UR1021: 6/0.062/5.5



CE IP54



White / Black / Grey

Alu. + PC


7W 290lm

Packing [Pcs/m³/KG]

UR1022: 6/0.062/5.5



CE IP54

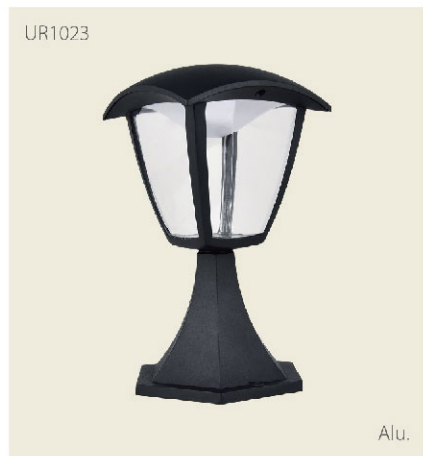


White / Black / Grey

Alu. + PC

7W 290lm

Packing [Pcs/m³/KG]

UR1023: 6/0.062/5.5



CE IP54



White / Black / Grey

Alu. + PC

7W 290lm

Packing [Pcs/m³/KG]

UR1024: 6/0.062/5.5



CE IP54



White / Black / Grey

Alu. + PC

7W 290lm


Packing [Pcs/m³/KG]

UR1025: 4/0.065/7



CE IP54

Modern Palace Lamps

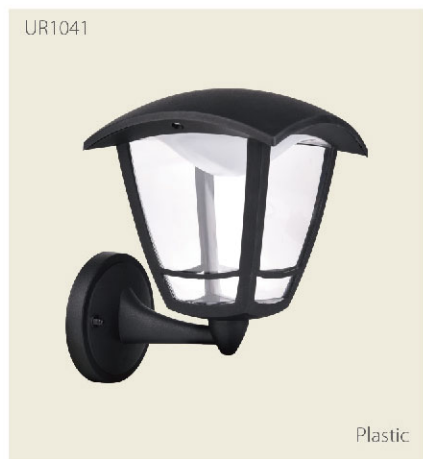


White / Black / Grey

PP + PC


8W 400lm

Packing [Pcs/m³/KG]

UR1041: 12/0.112/7



CE IP44

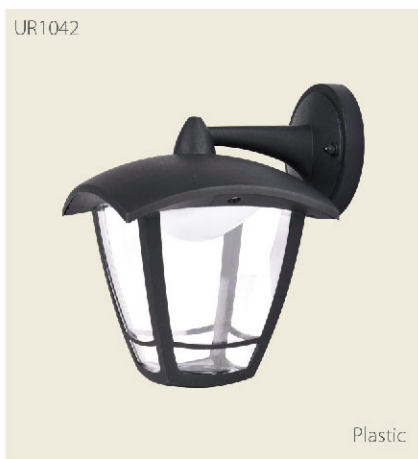

White / Black / Grey

PP + PC

8W 400lm

Packing [Pcs/m³/KG]

UR1042: 12/0.112/7



CE IP44



White / Black / Grey

PP + PC

8W 400lm

Packing [Pcs/m³/KG]

UR1045: 4/0.100/7



CE IP44



White / Black / Grey

PP+ PC

8W 400lm

Packing [Pcs/m³/KG]

UR1043: 6/0.063/5



CE IP44



White / Black / Grey

PP+ PC

8W 400lm

Packing [Pcs/m³/KG]

UR1044: 6/0.063/5



CE IP44

Classic Palace Lamps




UR1036



White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1036: 6/0.115/6




UR1037



White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1037: 6/0.038/6




UR1039



White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1039: 4/0.078/5.5

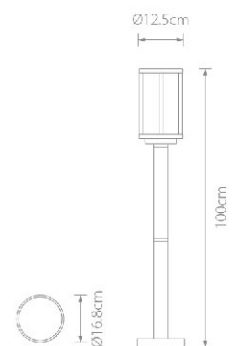


UR1036S



White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1036S: 6/0.115/6




UR1038



White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1038: 4/0.052/3

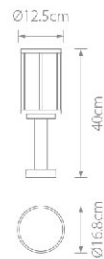

Classic Palace Lamps




UR1021



White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1021: 6/0.062/5.5




UR1022



White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1022: 6/0.062/5.5



UR1023



White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1023: 6/0.062/5.5




UR1024




White / Black / Grey
Alu. + PC
E27 Max.100W/60W

Packing [Pcs/m³/KG]
UR1024: 4/0.065/7

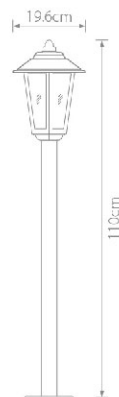


Classic Palace Lamps

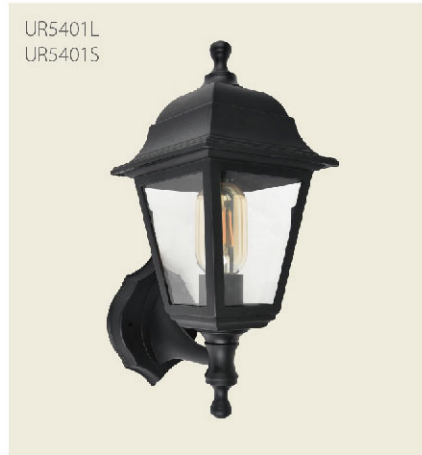

UR5401L
UR5401S




White / Black / Grey
PP + 4 Glass
E27 Max.100W/60W
Packing [Pcs/m³/KG]
UR5401L: 12/0.123/15.5
UR5401S: 12/0.104/13

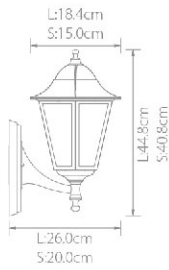

UR5402L
UR5402S




White / Black / Grey
PP + 4 Glass
E27 Max.100W/60W
Packing [Pcs/m³/KG]
UR5402L: 12/0.123/15.5
UR5402S: 12/0.104/13

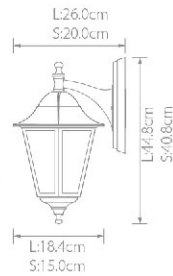

UR5403L
UR5403S




White / Black / Grey
PP + 4 Glass
E27 Max.100W/60W
Packing [Pcs/m³/KG]
UR5403L: 12/0.123/15.5
UR5403S: 12/0.104/13



UR5601L
UR5601S




White / Black / Grey
PP + 6 Glass
E27 Max.100W/60W
Packing [Pcs/m³/KG]
UR5601L: 12/0.137/15.5
UR5601S: 12/0.104/13

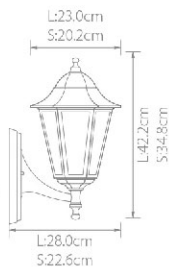

UR5602L
UR5602S




White / Black / Grey
PP + 6 Glass
E27 Max.100W/60W
Packing [Pcs/m³/KG]
UR5602L: 12/0.137/15.5
UR5602S: 12/0.104/13

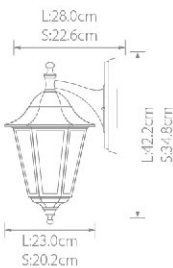


UR5603L
UR5603S



White / Black / Grey
PP + 6 Glass
E27 Max.100W/60W
Packing [Pcs/m³/KG]
UR5603L: 12/0.137/15.5
UR5603S: 12/0.104/13



Traditional palace lamps

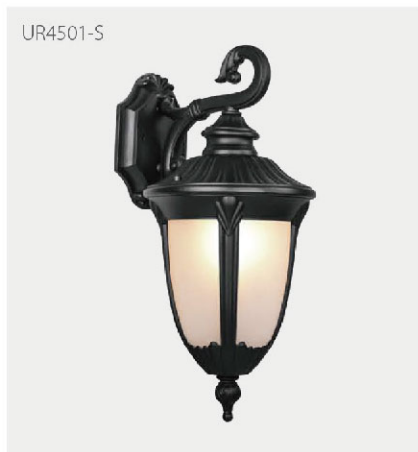


Golden / Black / Red Antique Brass

Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4501-S: 6/0.087/11.5

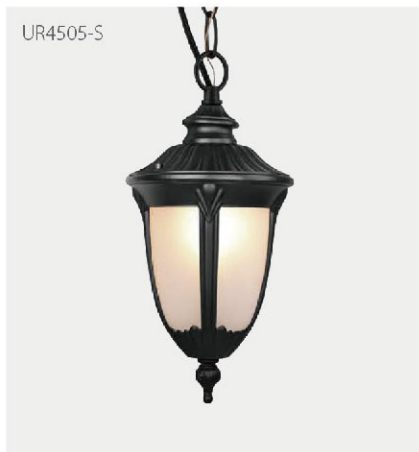


Golden / Black / Red Antique Brass

Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4505-S: 6/0.127/11.5

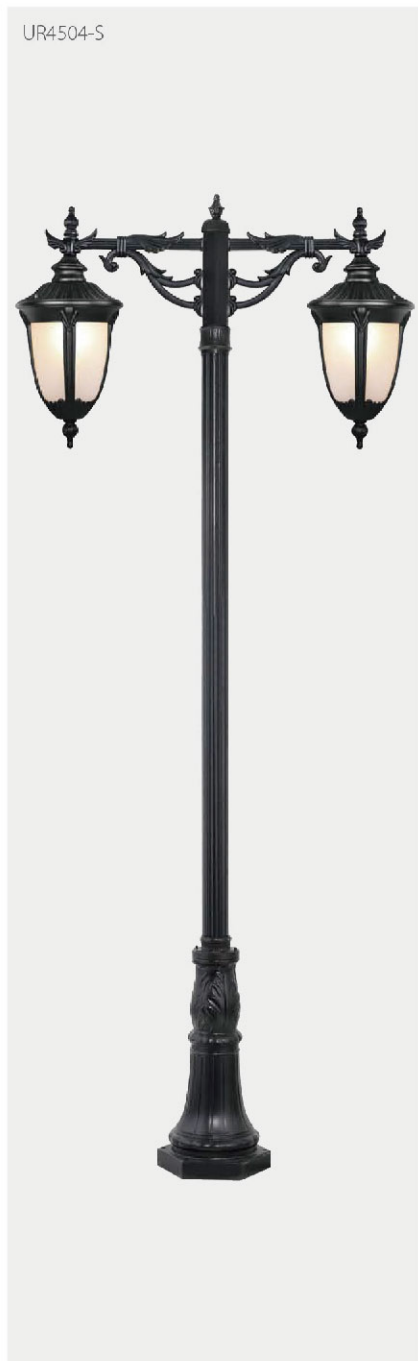

Golden / Black / Red Antique Brass

Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4502-S: 12/0.129/16



Golden / Black / Red Antique Brass

Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4503-S: 12/0.129/15.7



Golden / Black / Red Antique Brass


Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4504-S: 6/0.124/13

Traditional palace lamps

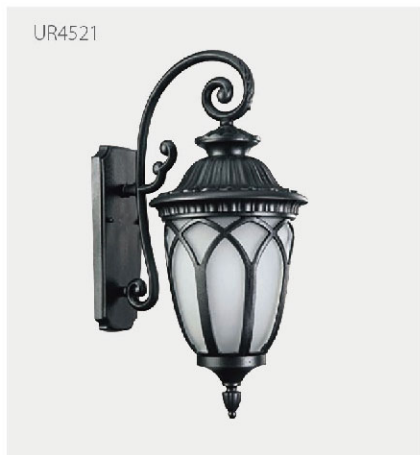


UR4521



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR4521: 6/0.087/11.5

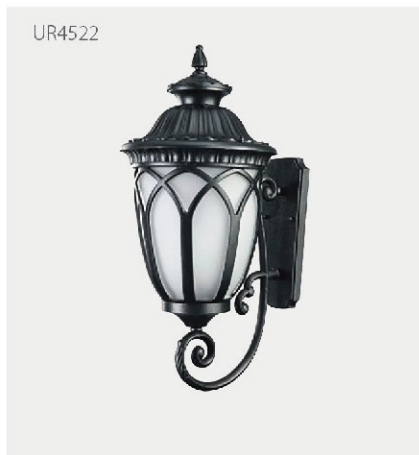


UR4522



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR4522: 6/0.127/11.5

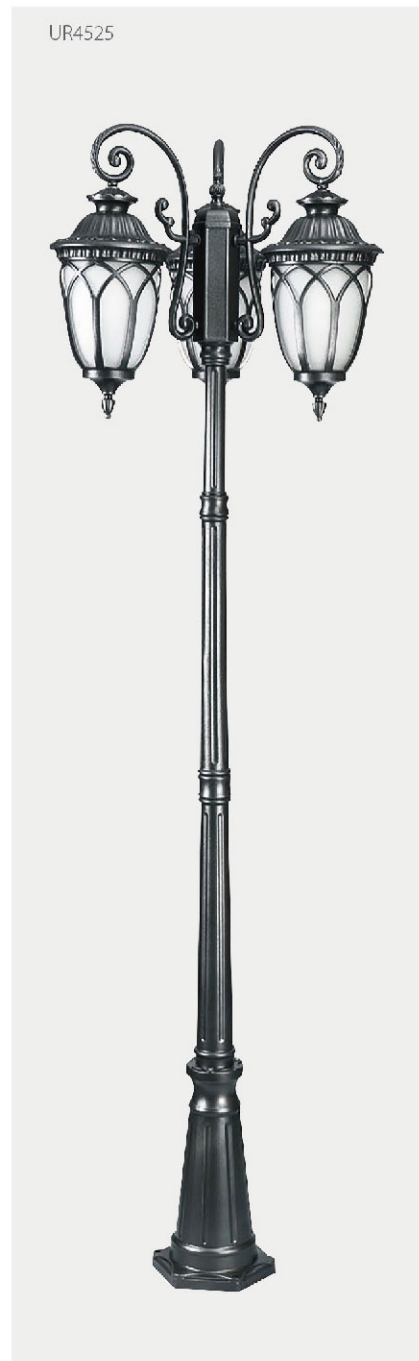


UR4525



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR4524: 6/0.124/13

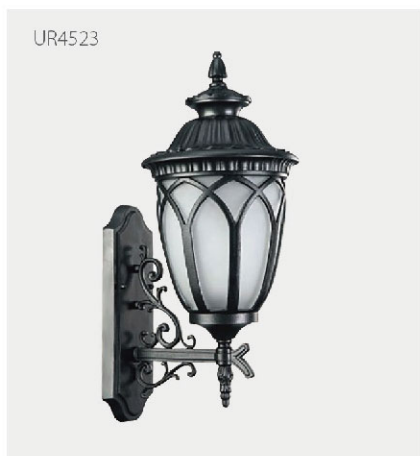


UR4523



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR4523: 12/0.129/16

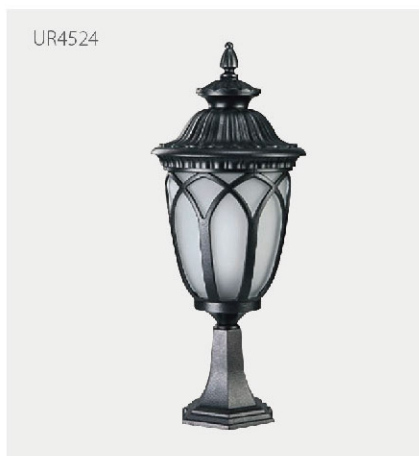

UR4524




Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR4524: 12/0.129/16



Traditional palace lamps

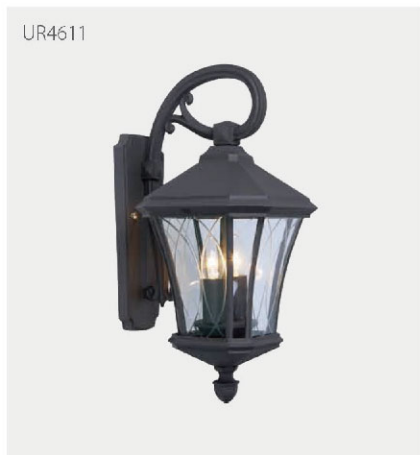


Golden / Black / Red Antique Brass

Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4611: 6/0.087/11.5

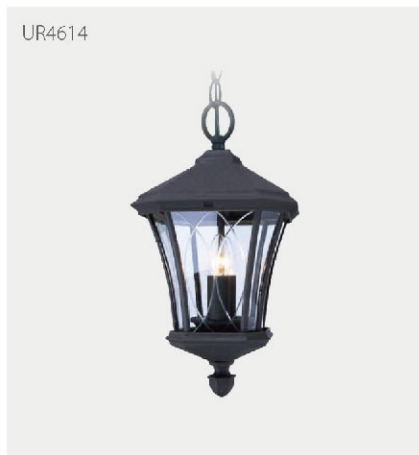


Golden / Black / Red Antique Brass

Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4505-S: 6/0.127/11.5

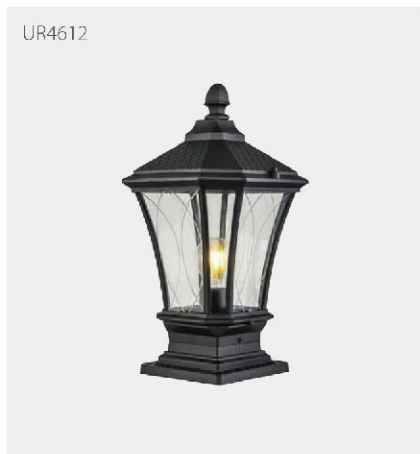

Golden / Black / Red Antique Brass

Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4612: 12/0.129/16



Golden / Black / Red Antique Brass

Alu. + Glass

E27 Max.60W

Packing [Pcs/m³/KG]

UR4613: 12/0.129/15.7



Golden / Black / Red Antique Brass


Alu. + Glass

E27 Max. 60W

Packing [Pcs/m³/KG]

UR4615: 6/0.124/13

Traditional palace lamps

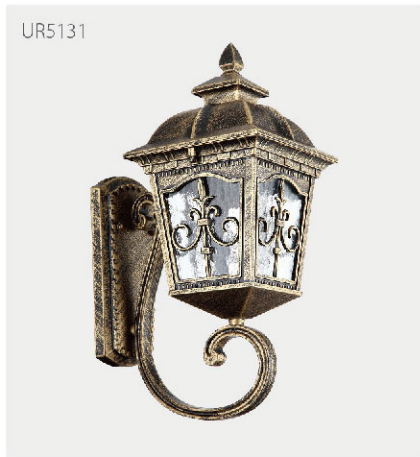


UR5131



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR5131: 6/0.087/11.5

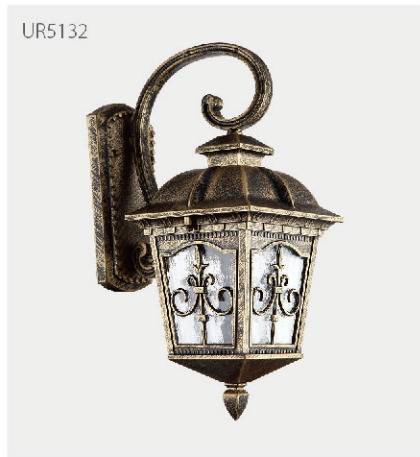


UR5132



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR5132: 6/0.127/11.5

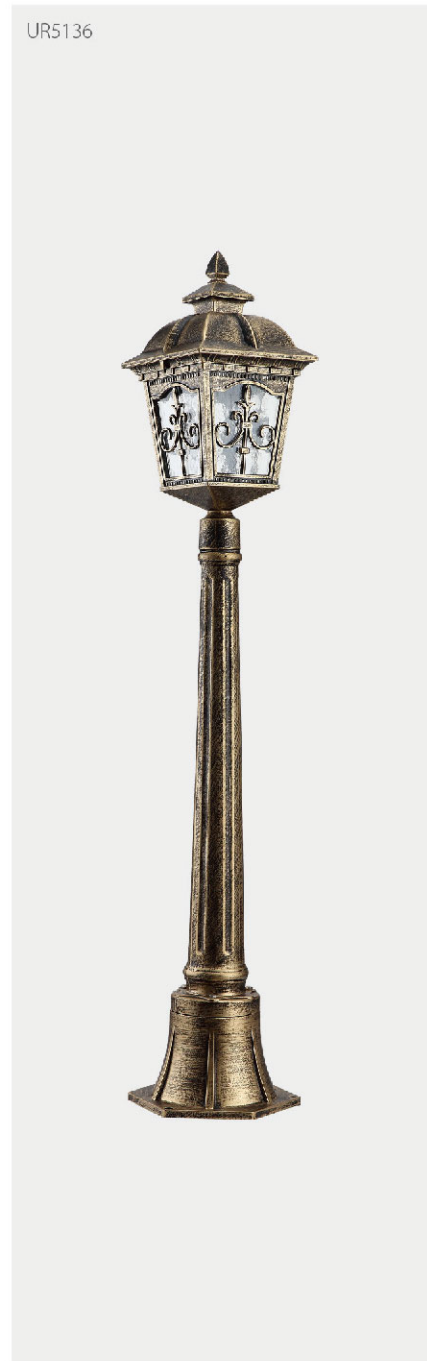


UR5136



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR5136: 6/0.124/13

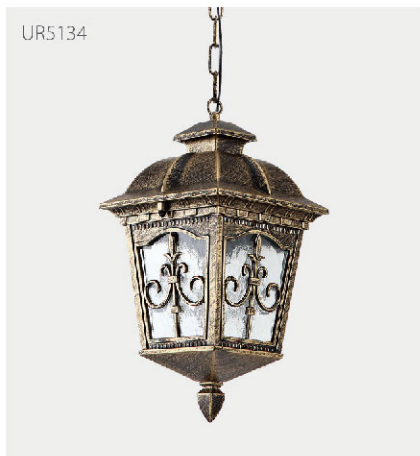


UR5134



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR5134: 12/0.129/16

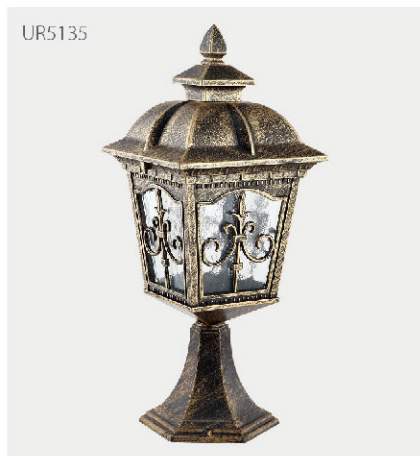

UR5135






Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max. 60W

Packing [Pcs/m²/KG]
UR5135: 12/0.129/15.7




Traditional palace lamps

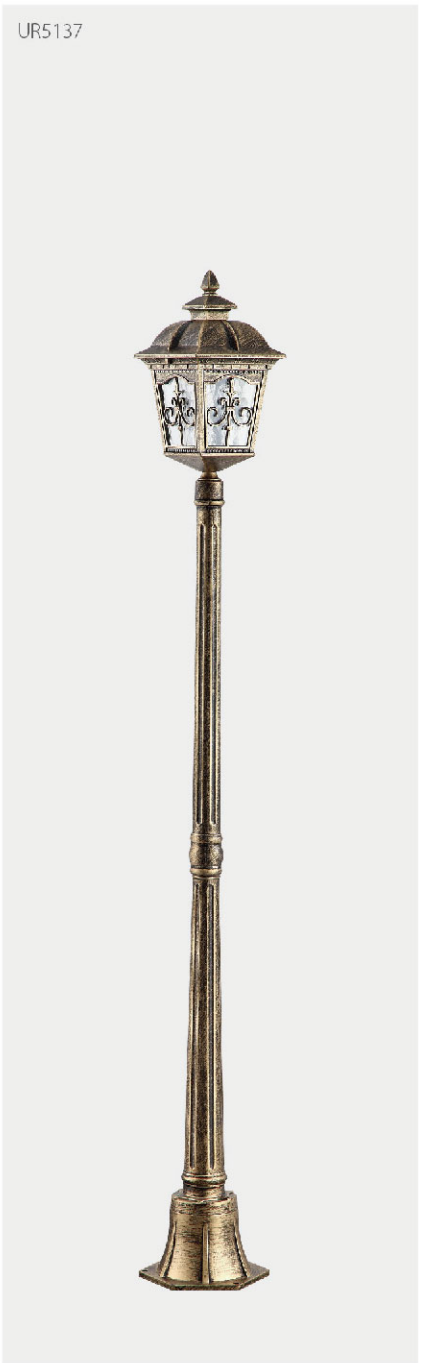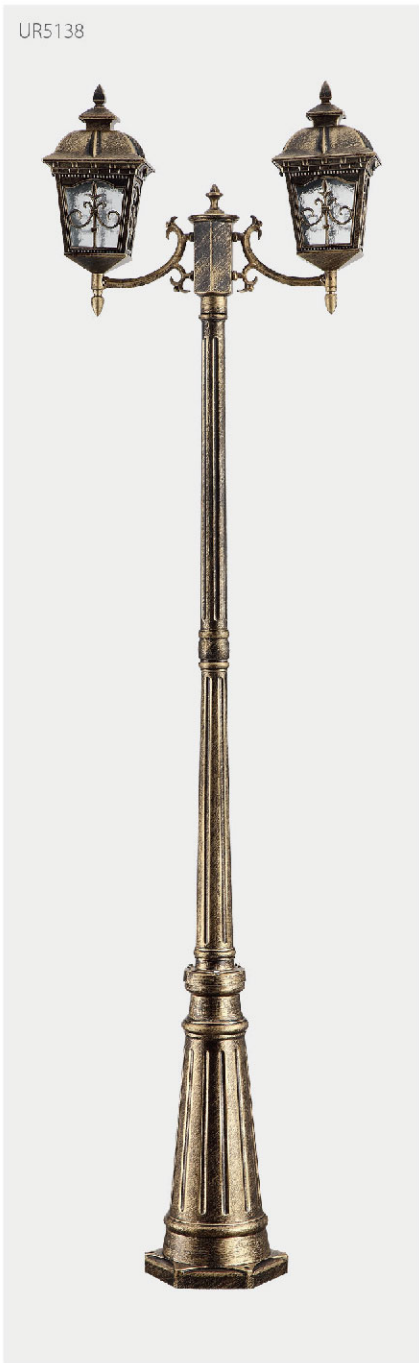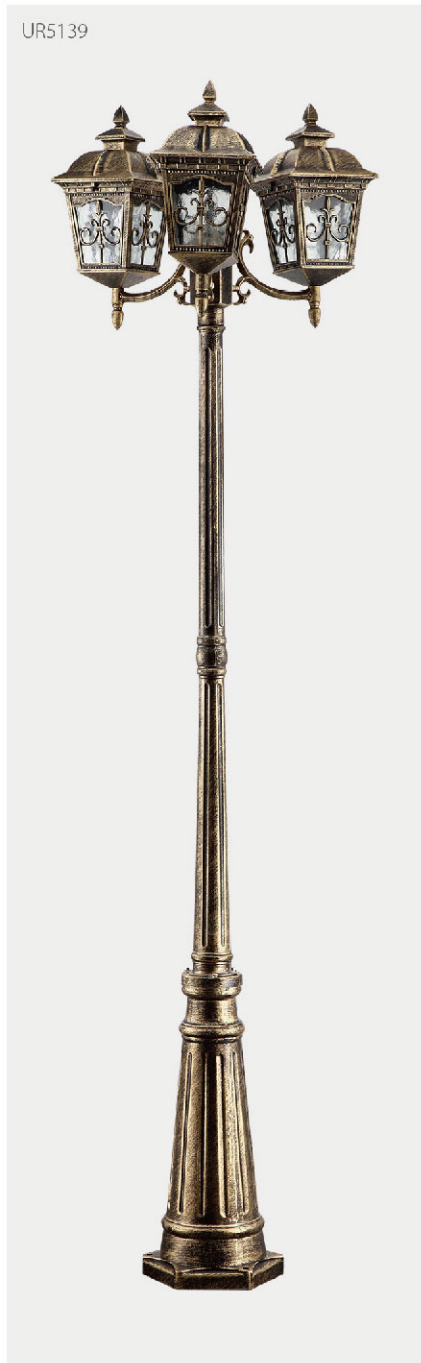

Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max.3x60W

Packing [Pcs/m³/KG]
UR5139: 1/0.064/8




Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max.2x60W

Packing [Pcs/m³/KG]
UR5138: 1/0.064/6.5



Golden / Black / Red Antique Brass
Alu. + Glass
E27 Max.60W

Packing [Pcs/m³/KG]
UR5137: 1/0.044/4





Wall Lights & Corner Lights


Building Wall Lamp

IP65


CORROSION PROOF




CE **RoHS**

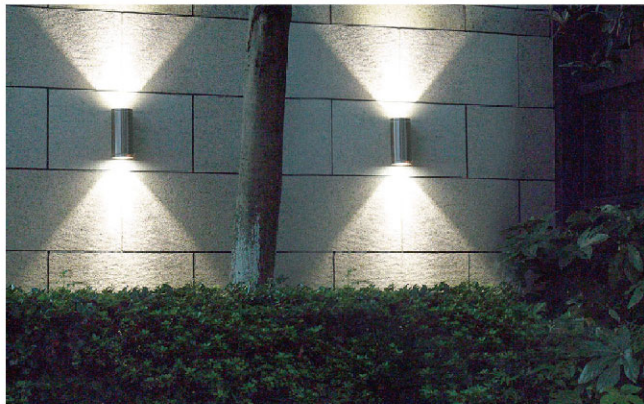

Product details



Cree chip
-20° +40°
60°

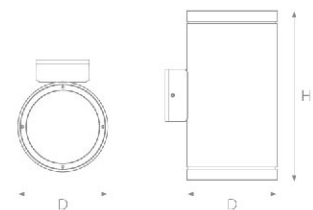

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*Hmm]	Packing [Pcs/m ² /KG]
WL320	220-240	2x10	2x890	≥70	>0.8	30000	SS+Alu.	Ø108*240	12/0.059/11.5
WL320	220-240	2x15	2x1415	≥70	>0.8	30000	SS+Alu.	Ø127*300	6/0.049/13

Building Wall Lamp

IP54

CORROSION PROOF



Available color

Black Dark Grey Silver Grey





WL108

WL109



Product details

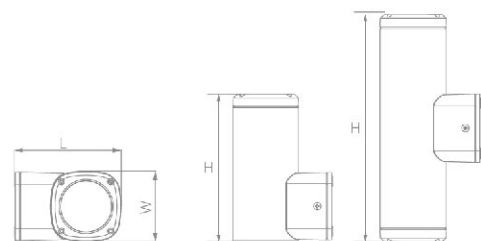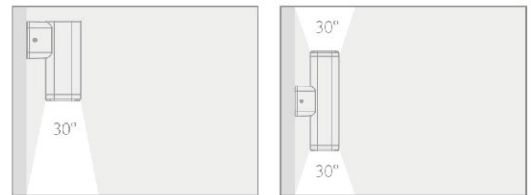

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*H*mm]	Packing [Pcs/m ³ /KG]
WL108	220-240	6	360	≥70	>0.8	30000	Alu.	106*106*157	16/0.029/14
WL109	220-240	12	680	≥70	>0.8	30000	Alu.	106*106*238	16/0.044/19

Building Wall Lamp

IP54

CORROSION PROOF

Available color


Black Dark Grey Silver Grey



WL110

WL111

WL112

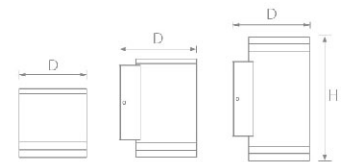

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*Hmm]	Packing [Pcs/m ³ /KG]
WL110	220-240	1x6	210	≥80	>0.5	30000	Die-cast Alu. +Glass	Ø102*104	20/0.033/15
WL111	220-240	1x6	210	≥80	>0.5	30000	Die-cast Alu. +Glass	Ø102*165	12/0.046/12
WL112	220-240	2x6	420	≥80	>0.5	30000	Die-cast Alu. +Glass	Ø102*208	12/0.059/14

IP54

CORROSION PROOF

Available color


Black Dark Grey Silver Grey



WL113

WL114

WL115


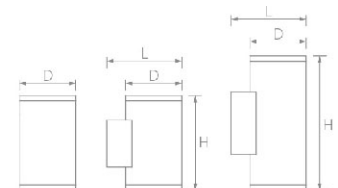


Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*L*Hmm]	Packing [Pcs/m ³ /KG]
WL113	220-240	1x6	360	≥70	>0.5	30000	Die-cast Alu. +Glass	Ø90*128	18/0.033/15
WL114	220-240	1x6	360	≥70	>0.5	30000	Die-cast Alu. +Glass	Ø90*120*144	18/0.046/12
WL115	220-240	2x6	2*360	≥70	>0.5	30000	Die-cast Alu. +Glass	Ø90*140*144	18/0.059/14

Building Wall Lamp

IP54

CORROSION PROOF

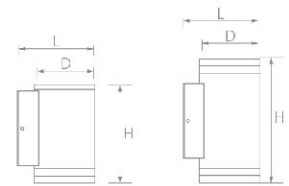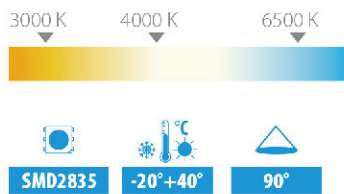



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*H:mm]	Packing [Pcs/m ³ /KG]
WL116	220-240	1x6	210	≥80	>0.5	30000	Die-cast Alu. +Glass	Ø102*165	12/0.046/12
WL117	220-240	2x6	420	≥80	>0.5	30000	Die-cast Alu. +Glass	Ø90*120*240	12/0.059/14

IP54

CORROSION PROOF

Available color

Black Dark Grey Silver Grey

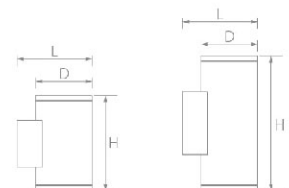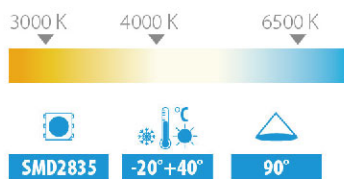

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [D*H:mm]	Packing [Pcs/m ³ /KG]
WL118	220-240	1x6	360	≥70	>0.5	30000	Die-cast Alu. +Glass	Ø90*120*144	18/0.046/12
WL119	220-240	2x6	2*360	≥70	>0.5	30000	Die-cast Alu. +Glass	Ø90*140*144	18/0.059/14

Courtyard Wall Lamp

OSRAM



IP54

CORROSION PROOF



Available color

Black | Dark Grey | Silver Grey

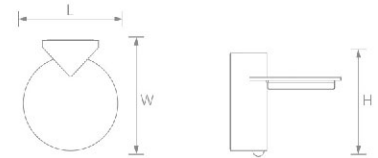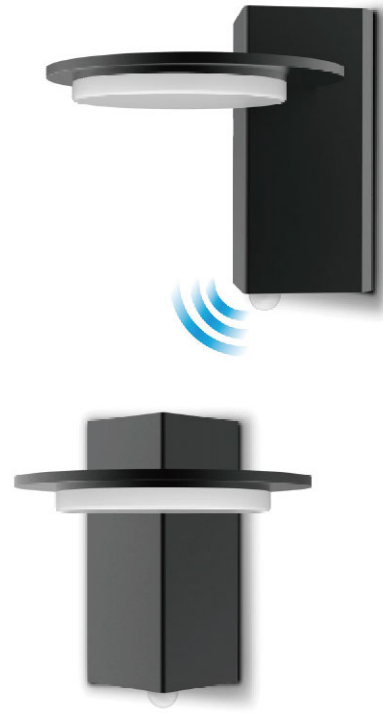

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
WL700	220-240	13.5	720	≥80	>0.5	30000	Die-casting Alu.+PC	232*135*72.5	8/0.030/8.4
WL701	220-240	13.5	440	≥80	>0.5	30000	Die-casting Alu.+PC	256*161*69	8/0.036/12.0

Courtyard Wall Lamp

OSRAM

IP54

CORROSION PROOF





WL162S



WL162

Available color

Black | Dark Grey | Silver Grey

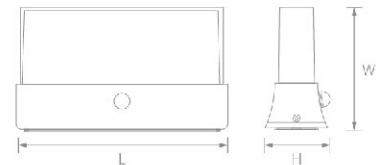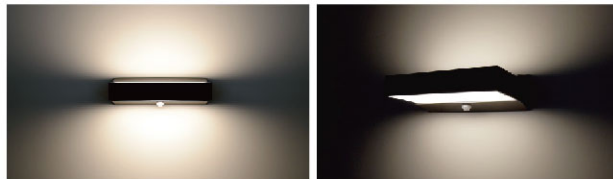

Detection Distance: 3m/6m (optional) (<24 °C)
 Ambient Light: 10LUX/2000LUX (choice)
 Time Delay: 5s, 30s, 1min, 3min, 5min, 8min (choice)
 Installation Height: 1.8-2.5m (wall mounting)
 Installation Height: 2.2-4m (ceiling mounting)



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WL162S	220-240	13.5	720	≥80	>0.5	30000	Die-casting Alu.+PC	232*135*72.5	8/0.030/8.4
WL163S	220-240	13.5	440	≥80	>0.5	30000	Die-casting Alu.+PC	256*161*69	8/0.036/12.0

Courtyard Wall Lamp

OSRAM

Epistar

IP65

CORROSION PROOF

180°




WL153



WL129

Available color

Black Dark Grey Silver Grey

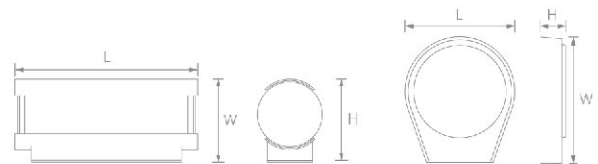

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WL153	100-240	13	1000	>80	>0.5	30000	Die-casting+Alu.+PC	223*130*105	8/0.037/12.8
WL129	220-240	10	870	≥80	>0.5	30000	Alu.+PC	175*201*45	16/0.042/18.3

Courtyard Wall Lamp

IP65

CORROSION PROOF


Available color

Black Dark Grey Silver Grey



WL122

WL128

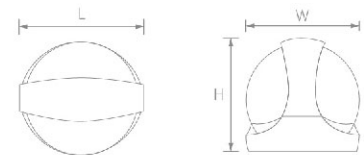

3000 K 4000 K 6500 K

SMD2835 -20°+40° 120°

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
WL122	220-240	13	1200	≥80	>0.5	30000	Alu.+PC	248*117*70	12/0.039/14.1
WL128	220-240	13	1200	≥80	>0.5	30000	Alu.+PC	203*203*180	8/0.077/10.9

Courtyard Wall Lamp

Epistar

IP65

CORROSION PROOF




WL124



WL121

Available color

Black Dark Grey Silver Grey

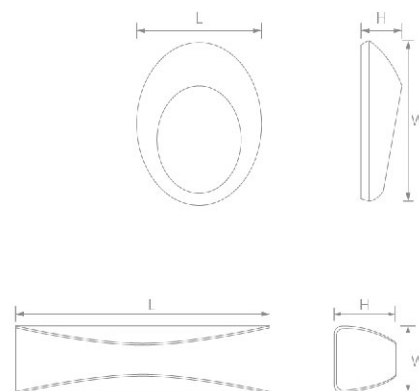

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WL121	220-240	10	970	≥80	>0.5	30000	Alu.+PC	230*72*56	8/0.015/4.2
WL124	220-240	13	1200	≥80	>0.5	30000	Alu.+PC	169*219*55	8/0.027/7.0

Courtyard Wall Lamp

Epistar

IP65

CORROSION PROOF

Available color



Black Dark Grey Silver Grey



WL141



WL140

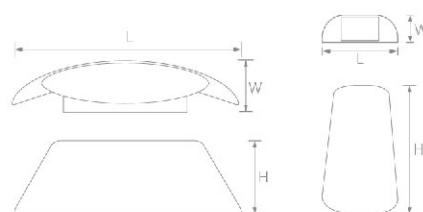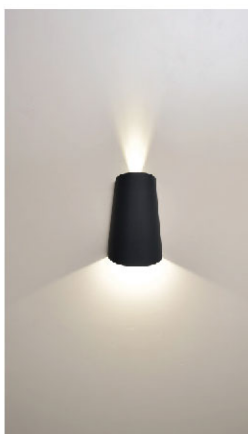

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WL140	220-240	9	870	≥80	>0.5	30000	Alu.+PC	236*68*75	9/0.020/7.0
WL141	220-240	11	900	≥80	>0.5	30000	Alu.+PC	106*51*174	18/0.030/14.0

Courtyard Wall Lamp

IP54

CORROSION PROOF



WL702



WL703

Available color

Black Dark Grey Silver Grey




WL702S



WL703S



Shiny black, frosted texture, anti rust, overall beautiful, durable

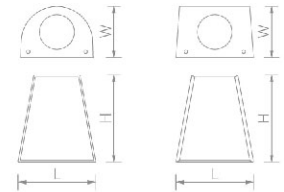

Item No.	Voltage [V]	Wattage [W]	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
WL702	220-240	1*GU10 Max.35W	30000	Alu.+Glass	125*88*156	18/ 0.020/10.0
WL703	220-240	2*GU10 Max.2*35W	30000	Alu.+Glass	125*88*156	18/0.020/9.0
WL702S	220-240	1*GU10 Max.35W	30000	Alu.+Glass	125*88*156	18/ 0.020/10.0
WL703S	220-240	2*GU10 Max.2*35W	30000	Alu.+Glass	125*88*156	18/0.020/9.0

Courtyard Wall Lamp

IP65


CORROSION PROOF




WL171



WL174

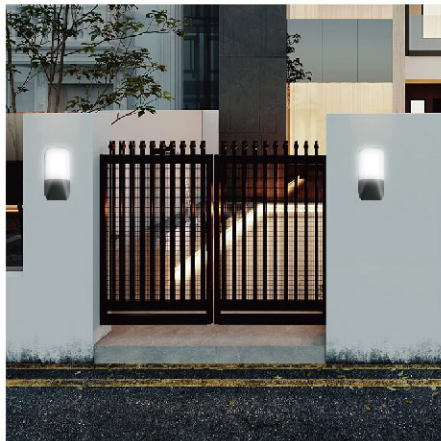

Corrosion resistant, suitable for seaside basement lamp and other harsh environment




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WL171	220-240	7	530	≥80	>0.5	30000	Alu.+PC	75*47*270	12/0.015/7.5
WL174	220-240	10	650	≥80	>0.5	30000	Alu.+PC	118*222*65.5	12/0.027/7.0

Courtyard Wall Lamp

IP65

CORROSION PROOF

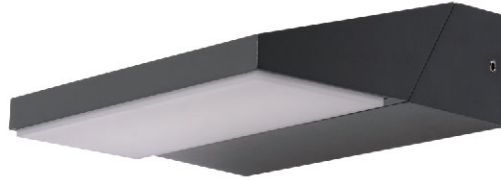


WL172



WL173

Details

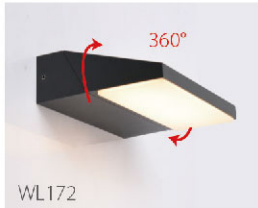



WL172



WL172



WL172

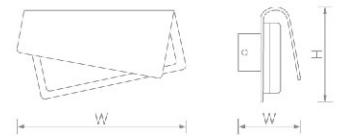

SMD2835
-20°+40°
120°

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
WL172	220-240	13	480	≥80	>0.5	30000	Alu.+PC	172*52*141	8/0.015/8.0
WL173	220-240	13	350	≥80	>0.5	30000	Alu.+PC	255*139*90	8/0.027/9.0

Corner Wall Lights

IP65

CORROSION PROOF



WL301




WL302



WL305



WL306

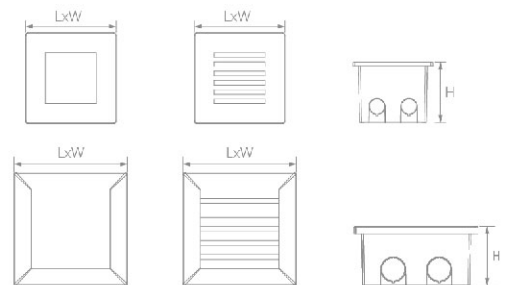

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WL301	220-240	1.5	35	≥80	>0.4	30000	Stainless Steel+Alu.	80*80*61	100/0.065/13
WL302	220-240	1.5	42	≥80	>0.4	30000	Stainless Steel+Alu.	80*80*61	100/0.065/13
WL305	220-240	3.5	136	≥80	>0.4	30000	Stainless Steel+Alu.	135*135*65	48/0.086/16
WL306	220-240	3.5	195	≥80	>0.4	30000	Stainless Steel+Alu.	135*135*65	48/0.086/16

Corner Wall Lights

IP65

CORROSION PROOF



WL303




WL304



WL307



WL308

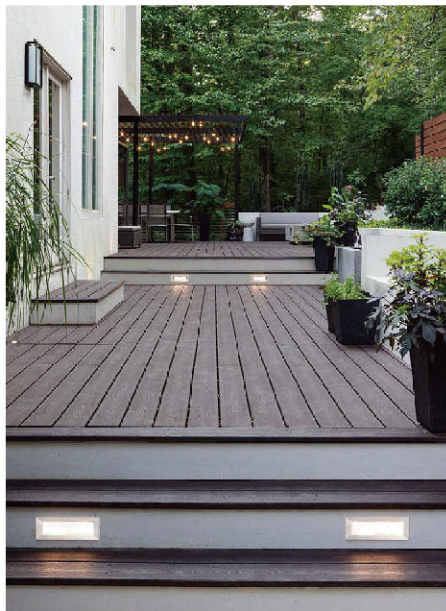

3000 K 4000 K 6500 K




SMD2835



-20°+40°



110°

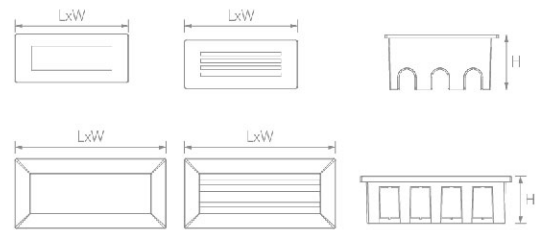

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WL303	220-240	1.5	32	≥80	>0.4	30000	Stainless Steel+Alu.	123*53*61	100/0.067/14
WL304	220-240	1.5	55	≥80	>0.4	30000	Stainless Steel+Alu.	123*53*61	100/0.067/14
WL307	220-240	3.5	125	≥80	>0.4	30000	Stainless Steel+Alu.	205*95*65	48/0.095/16
WL308	220-240	3.5	187	≥80	>0.4	30000	Stainless Steel+Alu.	205*95*65	48/0.095/16



Bulkhead Lamps & Security Lamps

Die-casting Bulkhead Lamps

IP54

CORROSION PROOF

E27



BL1209



BL1207



BL1316





BL1206



BL1205



BL1208

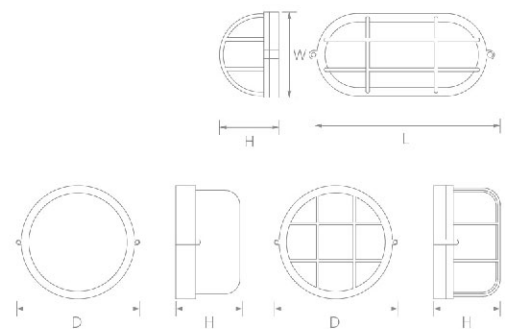

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
BL1209	220-240	Max.60	/	/	/	20000	Alu.+Glass	Ø188*175*88	20/0.064/15.0
BL1207	220-240	Max.60	/	/	/	20000	Alu.+Glass	Ø188*175*88	20/0.064/15.0
BL1316	220-240	Max.60	/	/	/	20000	Alu.+Glass	Ø188*175*88	20/0.064/15.0
BL1206	220-240	Max.60	/	/	/	20000	Alu.+Glass	210*106*78	20/0.052/13.0
BL1205	220-240	Max.60	/	/	/	20000	Alu.+Glass	210*106*78	20/0.052/13.0
BL1208	220-240	Max.60	/	/	/	20000	Alu.+Glass	210*106*78	20/0.052/13.0

LED Bulkhead Lights

IK06
ANTI-IMPACT

IP65
CORROSION PROOF



BL2115A/BL1285A


BL2125A




3 Color Temperature Adjustment



Built-in terminal block, dial code to adjust the color temperature

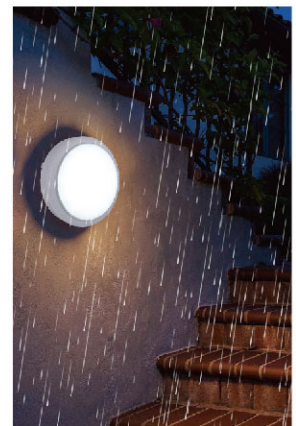

Convenient For Installation

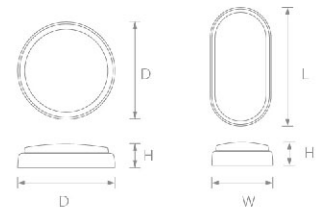

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
BL2115A-15W2-TDC	220-240	15	1275	≥80	>0.7	20000	PC+PC	∅180*66	20/0.061/14.0
BL1285A-24W2-TDC	220-240	24	2500	≥80	>0.7	20000	PC+PC	∅241*77	20/0.089/18.0
BL2125A-15W2-TDC	220-240	15	1275	≥80	>0.7	20000	PC+PC	221*131*68	20/0.055/14.0

LED Bulkhead Lights



CE ErP2.0

IK06

ANTI-IMPACT

IP54

CORROSION PROOF



BL211SA-15W2-PIR-TDC



BL212SA-15W2-PIR-TDC

3 Color Temperature Adjustment



Built-in terminal block, dial code to adjust the color temperature




SMD2835



-20° +40°



110°

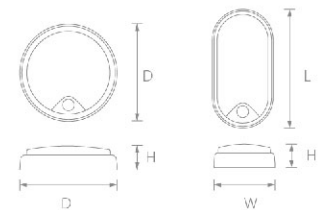

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL211SA-15W2-PIR-TDC	220-240	15	1275	≥80	>0.7	20000	PC+PC	∅180*66	20/0.061/14.0
BL212SA-15W2-PIR-TDC	220-240	15	1275	≥80	>0.7	20000	PC+PC	221*131*68	20/0.055/14.0

LED Bulkhead Lights




 **2.5H**
Battery life

CE ErP2.0




EMERGENCY

Details

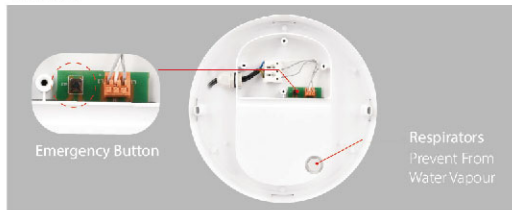

SMD2835 **-20°+40°** **110°**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
BL128SA-24W2	220-240	24	2500	≥80	>0.7	20000	PC+PC	Ø241*77	20/0.061/14.0
BL128L-15W2-EM	220-240	15	1500	≥80	>0.7	20000	PC+PC	Ø241*77	20/0.061/14.0
BL128L-18W2-EM	220-240	18	1800	≥80	>0.7	20000	PC+PC	Ø241*77	20/0.061/14.0

LED Bulkhead Lights

IK06

ANTI-IMPACT

IP54

CORROSION PROOF



BL211C



BL211C-PIR




BL212C





BL212C-PIR



Convenient For Installation

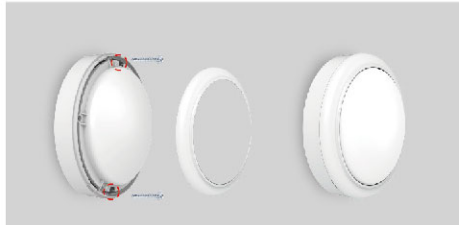

Color Options

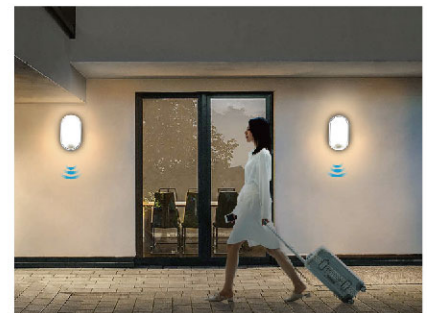

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
BL211C-8W2	220-240	8	640	>80	>0.7	20000	PC+PC	Ø140*58mm	20/0.033/5.2
BL211C-15W2	220-240	15	1200	≥80	>0.7	20000	PC+PC	Ø180*66mm	20/0.055/8.1
BL212C-8W2	220-240	8	640	≥80	>0.7	20000	PC+PC	168*100*58mm	20/0.042/7.8
BL212C-15W2	220-240	15	1200	≥80	>0.7	20000	PC+PC	221*131*68mm	20/0.051/8.0
BL211C-15W2-PIR	220-240	15	1200	>80	>0.7	20000	PC+PC	Ø180*66mm	20/0.055/8.4
BL212C-15W2-PIR	220-240	15	1200	>80	>0.7	20000	PC+PC	221*131*68mm	20/0.051/8.5

LED Bulkhead Lights

IK06
ANTI-IMPACT

IP65
CORROSION PROOF



BL115



BL117




BL116



BL118





Three color options

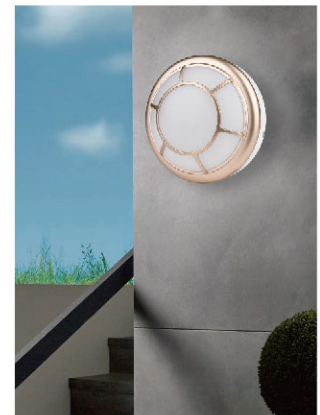

convenient for installation

Terminals

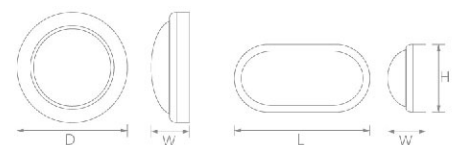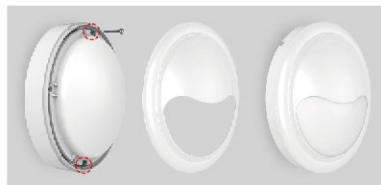

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
BL115	220-240	15	1050	≥70	>0.5	20000	PC+ABS	∅180*66	24/0.116/8.5
BL116	220-240	15	1050	≥70	>0.5	20000	PC+ABS	221*131*68	24/0.081/8.5
BL117	220-240	15	540	≥70	>0.5	20000	PC+ABS	∅180*66	24/0.116/8.5
BL118	220-240	15	540	≥70	>0.5	20000	PC+ABS	221*131*68	24/0.081/8.5

LED Bulkhead Lights

IP54

CORROSION PROOF




BL129




BL130

CE **RoHS** **ErP2.0**



Product Details

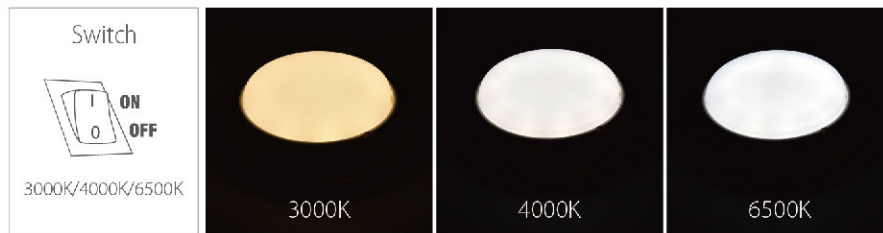

Easy installation

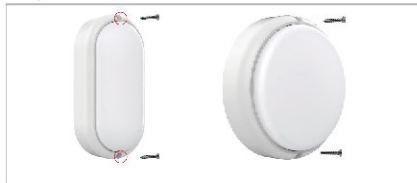

Terminals

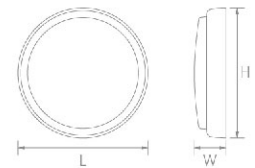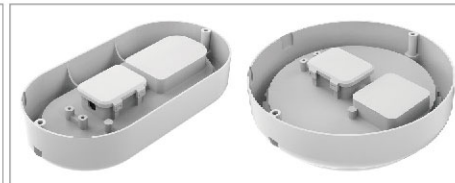

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL129C	220-240	8	560	≥70	>0.5	20000	PP+PP	Ø150*53.5	40/0.058/8.0
BL129C	220-240	15	1050	≥70	>0.5	20000	PP+PP	Ø190*59.5	40/0.083/11.0
BL129C	220-240	24	1680	≥70	>0.5	20000	PP+PP	Ø230*64.5	20/0.058/9.0
BL130C	220-240	8	510	≥70	>0.5	20000	PP+PP	180*90*51	40/0.045/7.0
BL130C	220-240	12	980	≥70	>0.5	20000	PP+PP	205*100*54.5	40/0.055/10.0

LED Bulkhead Lights

IP54

CORROSION PROOF



BL101




BL102



Product Details

Easy installation

Multiple directions wiring

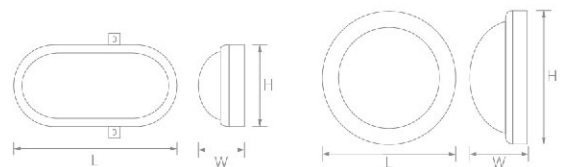

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL101	220-240	6	420	≥70	>0.5	30000	ABS+PC	168*75*150	24/0.074/6.3
BL101	220-240	12	840	≥70	>0.5	30000	ABS+PC	213*90*200	24/0.116/8.5
BL102	220-240	6	420	≥70	>0.5	30000	ABS+PC	172*72*116	24/0.049/8.3
BL102	220-240	12	840	≥70	>0.5	30000	ABS+PC	220*78*143	24/0.081/8.5

LED Bulkhead Lights

IP54

CORROSION PROOF




BL151




BL152


Product Details

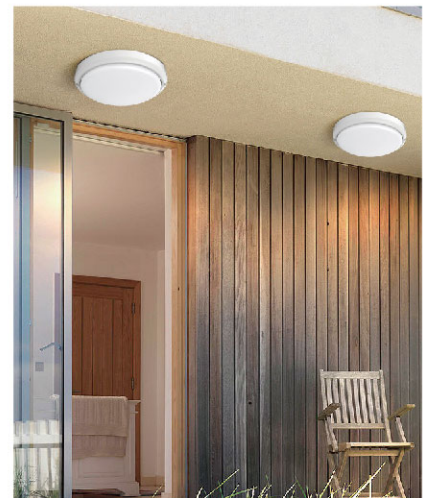


Easy installation

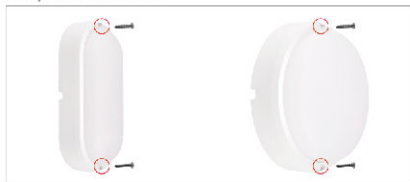

Terminals



SMD2835
-20°+40°
110°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m²/KG]
BL151L	220-240	8	800	≥80	>0.5	15000	PP+PP	∅140*57	50/0.068/10.3
BL151L	220-240	12	1200	≥80	>0.5	15000	PP+PP	∅155*62	50/0.081/11.5
BL151L	220-240	18	1800	≥80	>0.5	15000	PP+PP	∅172*62	50/0.104/13.8
BL152L	220-240	8	640	≥80	>0.5	15000	PP+PP	155*80*55	50/0.043/7.7
BL152L	220-240	12	960	≥80	>0.5	15000	PP+PP	174*87*55	50/0.055/8.8

LED Bulkhead Lights

IP54

CORROSION PROOF




BL127W



BL128W


Black available

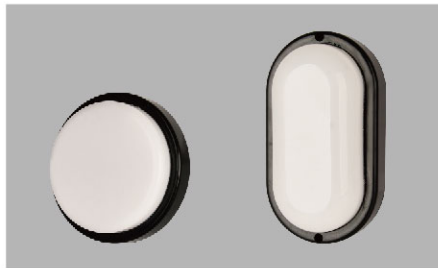


Easy installation



Terminals

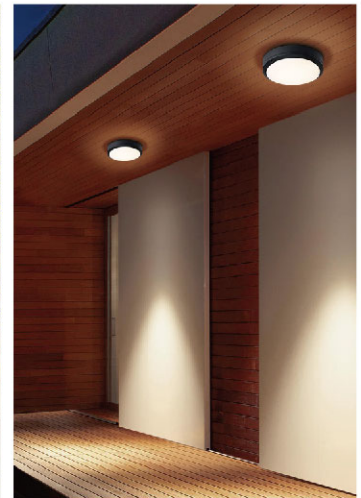

SMD2835
-20°+40°
110°

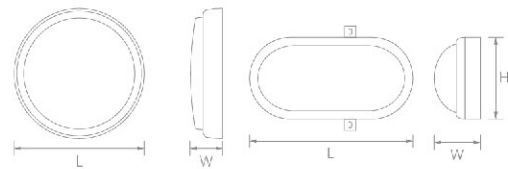

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL127W	100~265	8	600	≥80	>0.5	25000	PBT+PC	∅140*51	60/0.065/5.3
BL127W	100~265	12	900	≥80	>0.5	25000	PBT+PC	∅140*51	60/0.065/5.3
BL127W	100~265	18	1350	>80	>0.5	25000	PBT+PC	∅175*51	40/0.067/3.8
BL127W	100~265	25	1800	>80	>0.5	25000	PBT+PC	∅175*51	40/0.067/3.8
BL128W	100~265	8	600	≥80	>0.5	25000	PBT+PC	160*90*47	80/0.065/5.5
BL128W	100~265	12	900	≥80	>0.5	25000	PBT+PC	160*90*47	80/0.065/5.5
BL128W	100~265	18	1350	≥80	>0.5	25000	PBT+PC	199*97*47	40/0.043/5.2
BL128W	100~265	25	1800	>80	>0.5	25000	PBT+PC	199*97*47	40/0.043/5.2

LED Bulkhead Lights

IP54



CORROSION PROOF




BL233W



BL234W

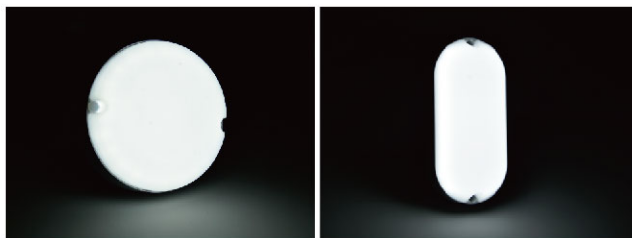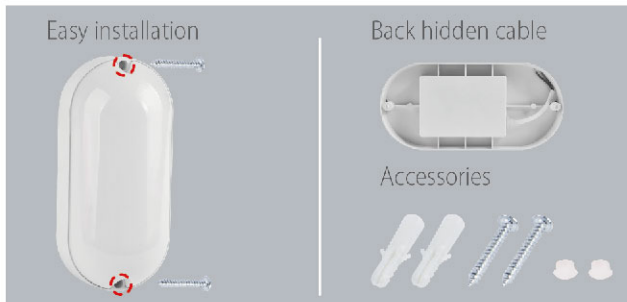

Luminaires lighting test, this product emits evenly without dark areas

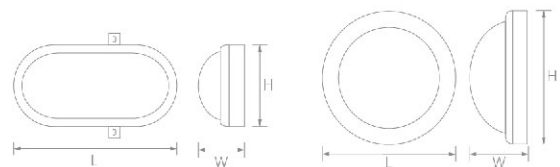

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL233W	110-240	8	600	≥70	>0.5	20000	PP+PP	Ø138*45	50/0.067/8.4
BL233W	110-240	15	1125	≥70	>0.5	20000	PP+PP	Ø168*55	50/0.103/10
BL234W	110-240	8	600	≥70	>0.5	20000	PP+PP	168*45*70	50/0.063/8.2
BL234W	110-240	15	1125	≥80	>0.5	20000	PP+PP	205*55*100	50/0.077/9.2

LED Bulkhead Lights

IP54

CORROSION PROOF





BL245W



BL246W

Style Options

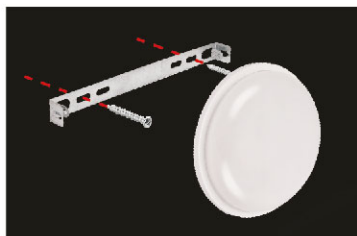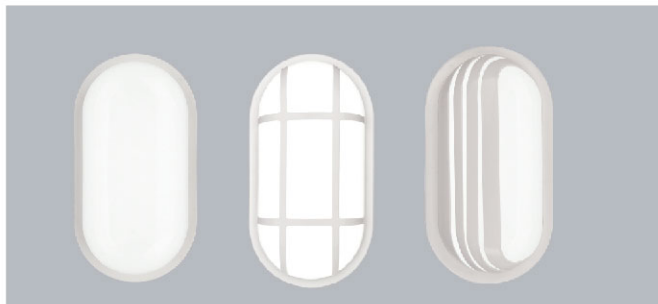


Easy Installation



High Lumen Output



 **SMD2835**
 **-20°+40°**
 **110°**

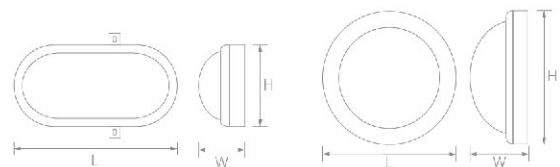

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
BL245W	165-265	15	1275	≥80	>0.5	10000	PP+PP	Ø165*58	40/0.079/8.4
BL245W	165-265	20	1760	≥80	>0.5	10000	PP+PP	Ø219*66	30/0.114/10
BL246W	165-265	15	1275	≥80	>0.5	10000	PP+PP	212*114*60	40/0.072/8.2
BL246W	165-265	20	1760	≥80	>0.5	10000	PP+PP	268*146*71	30/0.100/8.8

Security Lamps

IP54

CORROSION PROOF



Available color



Induction technical parameters

Motion detection range: 120°
Sensing distance: 8-10m


Induction mode

a. Induction delay:

1min / 3min / 10min

b. Dusk-to-dawn Light:

With the sensitive photocell sensor, this LED security light automatically turns on at dusk and off at dawn, saving you electricity bill and providing the security of having lights on in the evening to deter intruders.

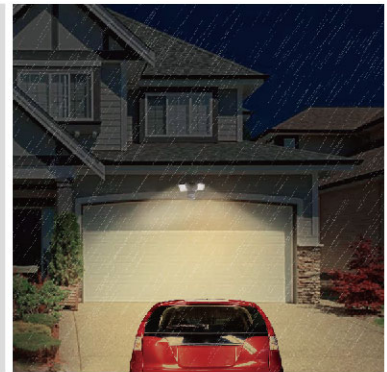

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
SL101	100-140 / 220-240	2x12	2000	≥80	>0.5	30000	Alu.+Glass	248*191*193	8/0.130/16.2

Security Lamps

IP54

CORROSION PROOF



Available color



Sensing function
The lamp sensing function can be adjusted using sensor.

Induction delay:
1min / 3min / 10min

Dusk-to-dawn Light:
With the sensitive photocell sensor, this LED security light automatically turns on at dusk and off at dawn.



2-headed design gives you a wider light casting and motion detection range (270°)



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
SL102	100-140 /220-240	2x18	3000	≥80	>0.5	30000	Alu.+PC	254*127*206	8/0.130/16.2



Solar Wall Lights

Solar Wall Lights



Model No.	WL6001	PV Panel Spec	4V 0.65W
Lumen	20lm	Qty	20pcs
Battery Spec	18500 800mAh	Lamp Size	96*124*48mm



Model No.	WL6003	PV Panel Spec	5.5V 0.65W
Lumen	80lm	Qty	20pcs
Battery Spec	18650 1200mAh	Lamp Size	96*124*48mm



Model No.	WL6004	PV Panel Spec	5.5V 0.65W
Lumen	100lm	Qty	/
Battery Spec	18650 1200mAh	Lamp Size	96*124*48mm

Solar Wall Lights



Poly solar panel



IP44



Battery Type
Lithium



Charging Time
8-10hrs



Operation Time
15s*150Times



LED Type
SMD2835



Light Control



PIR Sensor


Model No.	WL6005	PV Panel Spec	5.5V 1.3W
Lumen	110lm	Qty	40pcs
Battery Spec	18650 2400mAh	Lamp Size	192*43*115mm



Poly solar panel



IP44



Battery Type
Lithium



Charging Time
8-10hrs



Operation Time
15s*150Times



LED Type
COB



Light Control



PIR Sensor

Model No.	WL6009	PV Panel Spec	5.5V 1.3W
Lumen	140lm	Qty	/
Battery Spec	18650 2400mAh	Lamp Size	192*43*115mm



Solar Wall Lights



Model No.	SWL6005	PV Panel Spec	5.5V 0.3W
Lumen	100lm	Qty	22pcs
Battery Spec	18650 1200mAh	Lamp Size	96*124*48mm



Model No.	SWL6006	PV Panel Spec	5.5V 0.55W
Lumen	230lm	Qty	32pcs
Battery Spec	18650 2000mAh	Lamp Size	168*145*60mm



Model No.	SWL6301	PV Panel Spec	5.5V 0.65W
Lumen	120lm	Qty	90pcs
Battery Spec	18650 1200mAh	Lamp Size	143*53*101mm

Solar Wall Lights



Model No.	SWL6303	PV Panel Spec	5.5V 0.65W
Lumen	150lm	Qty	33pcs
Battery Spec	18650 1200mAh	Lamp Size	119*101*54mm



Model No.	SWL6304	PV Panel Spec	5.5V 1.3W
Lumen	260lm	Qty	73pcs
Battery Spec	18650 2400mAh	Lamp Size	188*114*62.5mm



Solar Wall Lights



Model No.	SWL6513	PV Panel Spec	5.5V 0.65W
Lumen	130lm	Qty	148pcs
Battery Spec	18650 1200mAh	Lamp Size	113*124*51mm



Model No.	SWL6515	PV Panel Spec	5.5V 1.25W
Lumen	450lm	Qty	144pcs
Battery Spec	18650 2000mAh	Lamp Size	299*144.5*194mm



Solar Wall Lights



Model No.	SWL6501	PV Panel Spec	5.5V 0.44W
Lumen	120lm	Qty	12pcs
Battery Spec	18650 1200mAh	Lamp Size	121*100*40mm




Model No.	SWL6503	PV Panel Spec	5.5V 0.6W
Lumen	250lm	Qty	34pcs
Battery Spec	18650 1500mAh	Lamp Size	153*105*49mm



Model No.	SWL6505	PV Panel Spec	5.5V 1.8W
Lumen	400lm	Qty	54pcs
Battery Spec	18650 2000mAh	Lamp Size	298*105*47.5mm

Solar Wall Lights

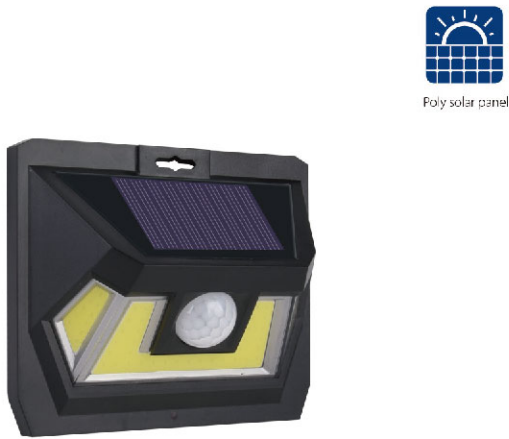

Model No.	SWL6502	PV Panel Spec	5.5V 0.44W
Lumen	350lm	Qty	/
Battery Spec	18650 1200mAh	Lamp Size	121*100*40mm




Model No.	SWL6504	PV Panel Spec	5.5V 0.6W
Lumen	450lm	Qty	/
Battery Spec	18650 1500mAh	Lamp Size	153*105*49mm



Model No.	SWL6506	PV Panel Spec	5.5V 1.8W
Lumen	800lm	Qty	/
Battery Spec	18650 2000mAh	Lamp Size	298*105*47.5mm

Solar Wall Lights



Poly solar panel

- IP65
- Battery Type: Lithium
- Charging Time: 8-10hrs
- Operation Time: 30s*150Times
- LED Type: COB
- Light Control
- PIR Sensor

Model No.	SWL6511	PV Panel Spec	5.5V 1W
Lumen	500lm	Qty	/
Battery Spec	18650 1800mAh	Lamp Size	180*100*115mm



Poly solar panel

- IP65
- Battery Type: Lithium
- Charging Time: 8-10hrs
- Operation Time: 30s*150Times
- LED Type: COB
- Light Control
- PIR Sensor

Model No.	SWL6512	PV Panel Spec	5.5V 1W
Lumen	500lm	Qty	/
Battery Spec	18650 1800mAh	Lamp Size	180*100*115mm



Solar Wall Lights



IP65



Battery Type
Lithium



Charging Time
8-10hrs



Operation Time
30s*150Times



LED Type
SMD2835



Light Control



PIR Sensor

Model No.	SWL6022	PV Panel Spec	5.5V 0.65W
Lumen	150lm	Qty	40pcs
Battery Spec	18650 1200mAh	Lamp Size	130*130*56mm



IP65



Battery Type
Lithium



Charging Time
8-10hrs



Operation Time
30s*150Times



LED Type
SMD2835



Light Control



PIR Sensor

Model No.	SWL6010	PV Panel Spec	5.5V 2.5W
Lumen	350lm	Qty	36pcs
Battery Spec	18650 1800mAh	Lamp Size	180*30*110mm



Solar Wall Lights



Model No.	GL4321	PV Panel Spec	5.5V 1.5W
Lumen	220lm	Qty	78pcs
Battery Spec	18650 2000mAh	Lamp Size	220*135*18mm



Model No.	GL4322	PV Panel Spec	5.5V 1.5W
Lumen	220lm	Qty	78pcs
Battery Spec	18650 1800mAh	Lamp Size	220*135*185mm



Solar Wall Lights



Poly solar panel



IP44



Battery Type
Lithium



Charging Time
8-10hrs



Operation Time
30s*250Times



LED Type
SMD2835



Light Control



PIR Sensor

Model No.	GL4319	PV Panel Spec	5.5V 1.5W
Lumen	240lm	Qty	81pcs
Battery Spec	18650 2400mAh	Lamp Size	280*155*115mm



Poly solar panel



IP44



Battery Type
Lithium



Charging Time
8-10hrs



Operation Time
30s*250Times



LED Type
SMD2835




Light Control



PIR Sensor

Model No.	GL4320	PV Panel Spec	5.5V 1.5W
Lumen	240lm	Qty	81pcs
Battery Spec	18650 2400mAh	Lamp Size	280*155*115mm

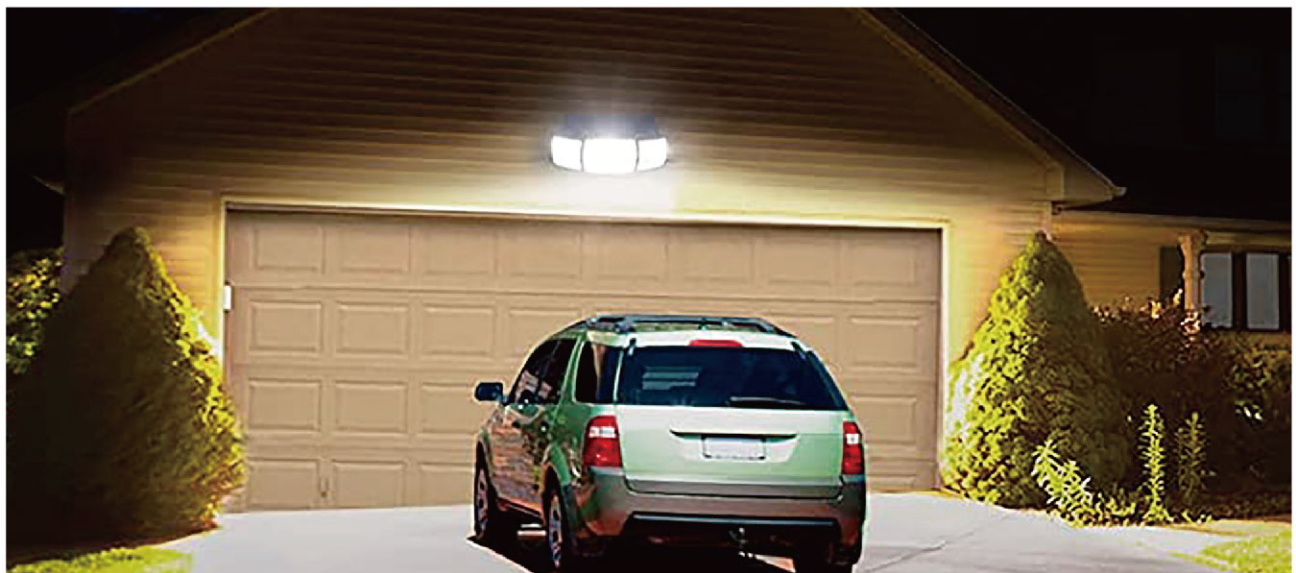



Solar Ground Lights

Solar Ground Lights



Poly solar panel



IP65



Color Temp.



Battery Type
Lithium



Charging Time
8-10hrs



Operation Time
10-12hrs



LED Type
SMD2835



Light Control

Model No.	SIL6514	PV Panel Spec	5.5V/1.5W	Battery Spec	18650 1800mAh
Lumen	180lm	Color Temp	3000K/4000K/6500K	Lamp Size	172*100*58mm
Model No.	SIL6513	PV Panel Spec	5.5V/1.5W	Battery Spec	18650 1800mAh
Lumen	180lm	Color Temp	3000K/4000K/6500K CCT	Lamp Size	172*100*58mm

Solar Ground Lights



Poly solar panel



IP54




Color Temp.



 Battery Type
Lithium

 Charging Time
6-8hrs

 Operation Time
10-12hrs

 LED Type
SMD2835

 Light Control

Model No.	SIL6514	PV Panel Spec	5.5V/1.5W	Battery Spec	18650 1800mAh
Lumen	180lm	Color Temp	3000K/6500K CCT	Lamp Size	172*100*58mm
Model No.	SIL6513	PV Panel Spec	5.5V/1.5W	Battery Spec	18650 1800mAh
Lumen	180lm	Color Temp	3000K/6500K CCT	Lamp Size	172*100*58mm

Solar Ground Lights



Poly solar panel



IP54



Color Temp.



SIL1013-1



SIL1013-2



SIL1013-3



SIL1013-4



 Battery Type
Lithium

 Charging Time
6 - 8hrs

 Operation Time
10 - 12hrs

 LED Type
SMD2835

 Light Control

Model No.	SIL1013-1	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*170mm
Model No.	SIL1013-2	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*600mm
Model No.	SIL1013-3	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*800mm
Model No.	SIL1013-4	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*1000mm

Solar Ground Lights



Poly solar panel



IP54



Color Temp.



SIL1014-1

SIL1014-2


SIL1014-3

SIL1014-4



 Battery Type
Lithium

 Charging Time
6 - 8hrs

 Operation Time
10 - 12hrs

 LED Type
SMD2835

 Light Control

Model No.	SIL1014-1	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*280mm
Model No.	SIL1014-2	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*600mm
Model No.	SIL1014-3	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*800mm
Model No.	SIL1014-4	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*1000mm

Solar Ground Lights



Poly solar panel



IP54



Color Temp.



SIL1015-1




SIL1015-2



 Battery Type
Lithium

 Charging Time
6-8hrs

 Operation Time
10-12hrs

 LED Type
SMD2835

 Light Control

Model No.	SIL1015-1	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*560mm
Model No.	SIL1015-2	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*760mm

Solar Ground Lights



Poly solar panel



IP54




Color Temp.



 Battery Type
Lithium

 Charging Time
6-8hrs

 Operation Time
10-12hrs

 LED Type
SMD2835

 Light Control

Model No.	SIL1016	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*620mm

Solar Ground Lights



Poly solar panel



IP54



Color Temp.



SIL1017-1




SIL1017-2



 Battery Type
Lithium

 Charging Time
6-8hrs

 Operation Time
10-12hrs

 LED Type
SMD2835

 Light Control

Model No.	SIL1017-1	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	230*670mm
Model No.	SIL1017-2	PV Panel Spec	5V/3.7W	Battery Spec	18650 4000mAh
Lumen	360lm	Color Temp	3000K/6500K CCT	Lamp Size	235*870mm

Solar Ground Lights



GL2163



GL2167



GL2171



GL2173



GL2177



GL2181



GL2197



GL2257



GL2276



Solar Ground Lights



GL2100



GL2172



GL2164



GL2162



GL2169



GL2101



GL2246



GL2254



GL2234

Solar Ground Lights



GL2503



GL2061



GL2055



GL2058



GL2078



GL2085



GL2089



GL2081

Solar Ground Lights



GL2091



GL2093



GL2095



GL2096



GL2103



GL2205



GL2090



GL2097

Solar Ground Lights



GL2108



GL2106



GL2104



GL2115



GL2105



GL2119



GL2110



GL2120

Solar Ground Lights



PA5014

PA5020



PA5015



PA5021



PA5022



PA5019



Solar Floodlights

Solar Floodlights



Poly solar panel



IP65



Color Temp.




LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

SFL100-30W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	450lm	70PCS	5V/12W	340*290*17mm	3.6V 5Ah	188*168*42mm
SFL100-60W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	800lm	84PCS	5V/18W	385*340*17mm	3.6V 10Ah	215*183*45mm
SFL100-100W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1100lm	120PCS	5V/25W	520*350*17mm	3.6V 15Ah	253*220*45mm
SFL100-200W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	2000lm	240PCS	5V/35W	630*350*17mm	3.6V 25Ah	300*270*50mm
SFL100-300W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	2300lm	360PCS	5V/40W	360*172*17mm	3.6V 35Ah	365*330*55mm

Solar Floodlights




Poly solar panel



IP65



Color Temp.

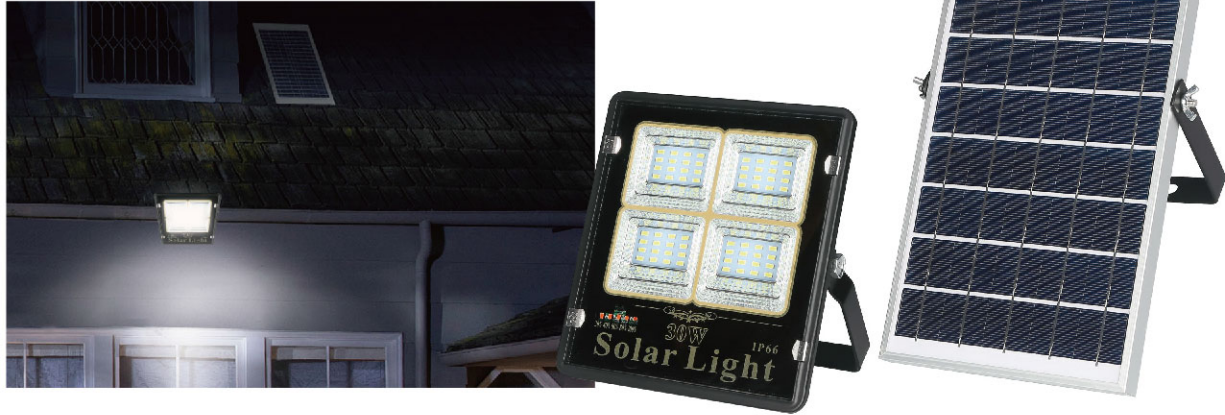


LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

SFL1323-30W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	360lm	70PCS	5V/12W	360*172*17mm	3.2V 5.5Ah	188*168*42mm
SFL1323-60W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	720lm	84PCS	5V/18W	340*290*17mm	3.2V 11Ah	215*183*45mm
SFL1323-100W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1080lm	120PCS	5V/25W	385*340*17mm	3.2V 16.5Ah	253*220*45mm
SFL1323-200W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1500lm	240PCS	5V/35W	520*350*17mm	3.2V 27.5Ah	300*270*50mm
SFL1323-300W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1740lm	360PCS	5V/40W	630*350*17mm	3.2V 33Ah	365*330*55mm

Solar Floodlights



Poly solar panel



IP65



Color Temp.




LED Type
SMD5730



Battery Type
LiFePO4




Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

SFL1322B-30W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	360lm	70PCS	5V/12W	360*172*17mm	3.2V 5.5Ah	200*180*42mm
SFL1322B-60W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	720lm	84PCS	5V/18W	340*290*17mm	3.2V 11Ah	228*196*45mm
SFL1322B-100W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1080lm	120PCS	5V/25W	385*340*17mm	3.2V 16.5Ah	270*237*45mm
SFL1322B-200W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1500lm	240PCS	5V/35W	520*350*17mm	3.2V 27.5Ah	318*288*50mm
SFL1322B-300W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1740lm	360PCS	5V/40W	630*350*17mm	3.2V 33Ah	385*350*55mm

Solar Floodlights



Poly solar panel



IP65



Color Temp.




LED Type
SMD3030



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control

	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
SFL1320-100W	1000lm	66PCS	5V/25W	385*340*17mm	3.2V 16.5Ah	188*168*42mm
SFL1320-200W	1500lm	66PCS	5V/35W	520*350*17mm	3.2V 27.5Ah	253*220*45mm
SFL1320-300W	1800lm	66PCS	5V/40W	630*350*17mm	3.2V 33Ah	300*270*50mm

Solar Floodlights




Poly solar panel



IP65



Color Temp.

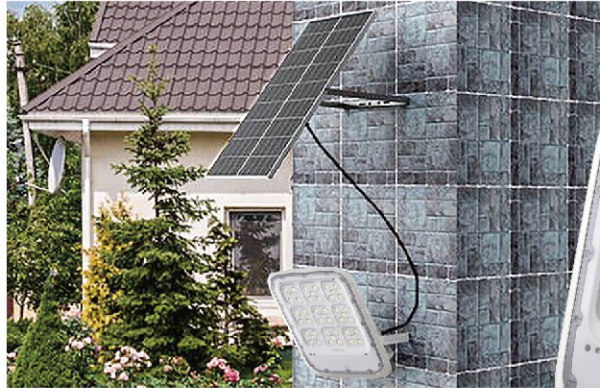


LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control

	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
GL4101-100W	1000lm	144PCS	5V/25W	390*340*17mm	3.2V 15Ah	190*50*247mm
GL4101-200W	1500lm	180PCS	5V/35W	520*350*17mm	3.2V 22Ah	217*58*285mm
GL4101-300W	1800lm	324PCS	5V/40W	630*350*17mm	3.2V 28Ah	245*60*325mm

Solar Floodlights



Poly solar panel



IP65



Color Temp.




LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
GL4102-100W	1000lm	112PCS	5V/25W	390*340*17mm	3.2V 15Ah	190*146*35mm
GL4102-200W	1500lm	180PCS	5V/35W	520*350*17mm	3.2V 22Ah	255*208*26mm
GL4102-300W	1800lm	324PCS	5V/40W	630*350*17mm	3.2V 28Ah	285*232*26mm
GL4102-400W	2200lm	360PCS	5V/50W	660*440*25mm	3.2V 40Ah	315*254*35mm

Solar Floodlights



Poly solar panel



IP65



Color Temp.




LED Type
COB



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control

SFL1326-30W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	360lm	COB 60*1PCS	5V/12W	360*172*17mm	3.6V 5Ah	200*180*42mm
SFL1326-60W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	720lm	COB 60*2PCS	5V/18W	340*290*17mm	3.6V 10Ah	228*196*45mm
SFL1326-100W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1080lm	COB 60*3PCS	5V/25W	385*340*17mm	3.6V 15Ah	270*237*45mm
SFL1326-200W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1500lm	COB 120*2PCS	5V/35W	520*350*17mm	3.6V 25Ah	318*288*50mm
SFL1326-300W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1740lm	COB 120*3PCS	5V/40W	630*350*17mm	3.6V 35Ah	318*288*50mm


Solar Floodlights



Poly solar panel



IP65



Color Temp.



LED Type
SMD2835



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control

SFL1327-40W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	720lm	81PCS	6V 5W	175*190*17mm	3.2V 5AH	150*200*45mm
SFL1327-60W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1085lm	144PCS	6V 10W	300*190*17mm	3.2V 10AH	200*250*60mm
SFL1327-120W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1750lm	441PCS	6V 20W	300*360*17mm	3.2V 20AH	250*300*60mm
SFL1327-200W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	2300lm	576PCS	6V 30W	420*360*17mm	3.2V 25AH	300*350*60mm

Solar Floodlights





Poly solar panel



IP65



Color Temp.

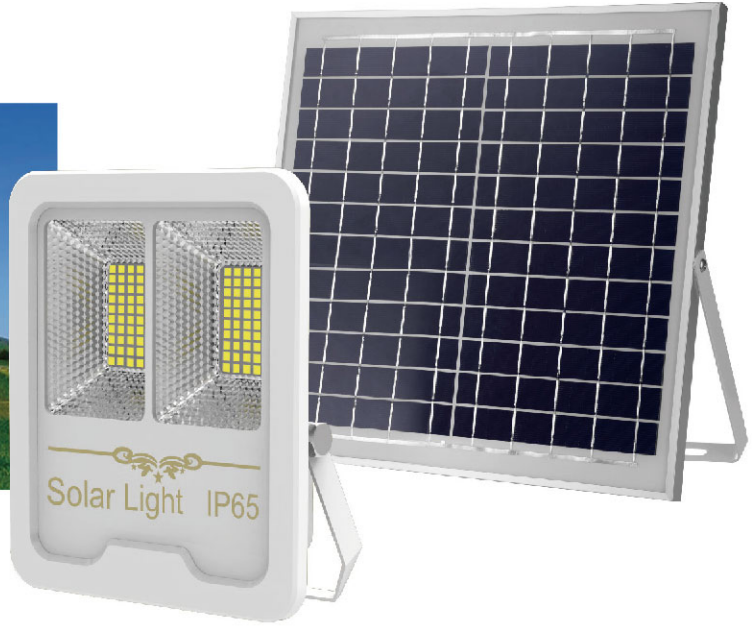

SFL1328-50W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	500lm	111PCS	6V 5W	175*190*17mm	3.2V 5AH	185*163*50mm
SFL1328-100W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	800lm	150PCS	6V 10W	300*190*17mm	3.2V 10Ah	237*204*55mm
SFL1328-200W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1500lm	351PCS	6V 20W	300*360*17mm	3.2V 20Ah	290*250*55mm
SFL1328-300W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	2000lm	517PCS	6V 20W	420*360*17mm	3.2V 25Ah	394*330*55mm

Solar Floodlights



Poly solar panel



IP65



Color Temp.



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Light Control



Radar induction



Monitor

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
SFL1329-100W	1000lm	112PCS	5V 20W	390*340*17mm	3.2V 15Ah	190*146*35mm
	1500lm	180PCS	5V 28W	520*350*17mm	3.2V 22Ah	255*208*26mm
SFL1329-200W	1800lm	324PCS	5V 35W	630*350*17mm	3.2V 28Ah	285*232*26mm
	2200lm	360PCS	5V 40W	660*440*25mm	3.2V 40Ah	315*254*35mm

Solar Floodlights



Poly solar panel



IP65



Color Temp.



LED Type
SMD2835



Charging Time
5-8hrs



Battery Type
Lithium



Operation Time
8-10hrs



PIR Sensor



Light Control



SCL001-36W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	700lm	35PCS	5V 25W	120*77mm	3.2V 40Ah	122*90*32mm

Solar Floodlights



Poly solar panel



IP44



Color Temp.



LED Type
SMD5730



Battery Type
32650



Charging Time
5-8hrs



Operation Time
10-12hrs



Light Control

	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
SCL001-18W	1500lm	256PCS	5V 12W	360*172*17mm	3.2V 22Ah	Φ290*68mm
SCL001-24W	1800lm	256PCS	5V 18W	340*290*17mm	3.2V 28Ah	Φ290*68mm
SCL001-36W	2200lm	256PCS	5V 25W	340*385*17mm	3.2V 40Ah	Φ290*68mm

Solar Street Lights



Solar Street Lights



Poly solar panel



IP65



Color Temp.




LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3201-100W	1000lm	150PCS	5V/25W	385*340*17mm	3.2V/15Ah	495*215*70mm
	1500lm	240PCS	5V/35W	520*350*17mm	3.2V/20Ah	495*215*70mm
RL3201-200W	1800lm	360PCS	5V/40W	630*350*17mm	3.2V/25Ah	495*215*70mm
	1500lm	240PCS	5V/35W	520*350*17mm	3.2V/20Ah	495*215*70mm

Solar Street Lights




Poly solar panel



IP65



Color Temp.



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3202-200W	1500lm	216PCS	5V 35W	390*340*17mm	3.2V 27.5Ah	480*240*78mm
	1800lm	288PCS	5V 40W	520*350*17mm	3.2V 33Ah	480*240*78mm
RL3202-300W	2200lm	360PCS	5V 50W	660*440*25mm	3.2V 44Ah	480*240*78mm
	1500lm	216PCS	5V 35W	390*340*17mm	3.2V 27.5Ah	480*240*78mm

Solar Street Lights



Poly solar panel



IP65



Color Temp.




LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3204-200W	1500lm	216PCS	5V 35W	390*340*17mm	3.2V 27.5Ah	480*240*78mm
	1800lm	288PCS	5V 40W	520*350*17mm	3.2V 33Ah	480*240*78mm
RL3240-300W	2200lm	360PCS	5V 50W	660*440*25mm	3.2V 44Ah	480*240*78mm
	1800lm	288PCS	5V 40W	520*350*17mm	3.2V 33Ah	480*240*78mm
RL3204-400W	2200lm	360PCS	5V 50W	660*440*25mm	3.2V 44Ah	480*240*78mm
	1800lm	288PCS	5V 40W	520*350*17mm	3.2V 33Ah	480*240*78mm

Solar Street Lights




Poly solar panel



IP65



Color Temp.



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3205-200W	1500lm	216PCS	5V 35W	390*340*17mm	3.2V 27.5Ah	480*225*78mm
	1800lm	288PCS	5V 40W	520*350*17mm	3.2V 33Ah	480*225*78mm
RL3205-300W	2200lm	360PCS	5V 50W	660*440*25mm	3.2V 44Ah	480*225*78mm
	1800lm	288PCS	5V 40W	520*350*17mm	3.2V 33Ah	480*225*78mm
RL3205-400W	2200lm	360PCS	5V 50W	660*440*25mm	3.2V 44Ah	480*225*78mm
	1800lm	288PCS	5V 40W	520*350*17mm	3.2V 33Ah	480*225*78mm

Solar Street Lights



Poly solar panel



IP65



Color Temp.



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

RL3207-60W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	700lm	66PCS	5V/18W	340*290*17mm	3.2V 10Ah	390*185*78mm
RL3207-100W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1000lm	66PCS	5V/25W	385*340*17mm	3.2V 16.5Ah	390*185*78mm
RL3208-200W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1500lm	120PCS	5V/35W	520*350*17mm	3.2V 27.5Ah	480*240*78mm
RL3208-300W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1800lm	120PCS	5V/40W	630*350*17mm	3.2V 33Ah	480*240*78mm
RL3208-400W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	2200lm	120PCS	5V/50W	660*440*25mm	3.2V 44Ah	480*240*78mm

Solar Street Lights



Poly solar panel



IP65



Color Temp.




LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



Time Control



Light Control



Power Display

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3210-100W	100lm	120PCS	5V/25W	385*340*17mm	3.2V 16.5Ah	495*215*70mm
	100lm	120PCS	5V/35W	520*350*17mm	3.2V/22mAh	495*215*70mm
RL3210-200W	100lm	120PCS	5V/40W	630*350*17mm	3.2V/27.5mAh	495*215*70mm
	100lm	120PCS	5V/25W	385*340*17mm	3.2V 16.5Ah	495*215*70mm

Solar Street Lights




Solar Street Lights



Poly solar panel



IP65



Color Temp.



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



PIR Sensor



Light Control

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3102-20W	300lm	20PCS	5V/7W	292*171mm	3.2V/5A	395*205*60mm
	400lm	40PCS	5V/11W	213*398mm	3.2V/10A	495*225*60mm
RL3102-40W	550lm	80PCS	5V/14W	232*508mm	3.2V/15A	625*245*60mm

Solar Street Lights



Poly solar panel



IP65



Color Temp.



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



PIR Sensor



Light Control

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3103-20W	300lm	40PCS	5V/7W	292*171mm	3.2V/5A	395*205*60mm
	400lm	80PCS	5V/11W	213*398mm	3.2V/10A	495*225*60mm
RL3103-40W	550lm	120PCS	5V/14W	232*508mm	3.2V/15A	625*245*60mm


Solar Street Lights



Poly solar panel



IP65




Color Temp.



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



PIR Sensor



Light Control

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3104-60W	550lm	140PCS	5V/11W	213*398mm	3.2V/10A	520*228*60mm
RL3104-90W	550lm	210PCS	5V/14W	232*508mm	3.2V/15A	630*248*60mm
RL3104-120W	700lm	280PCS	5V/18W	232*600mm	3.2V/20A	730*250*60mm

Solar Street Lights





Poly solar panel



IP65



Color Temp.



Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3105-30W	360lm	84PCS	5V/7W	300*186mm	3.2V/5A	384*207*57mm
RL3105-60W	720lm	168PCS	5V/11W	397*212mm	3.2V/10A	479*235*57mm
RL3105-90W	900lm	525PCS	5V/14W	508*228mm	3.2V/15A	618*256*57mm
RL3105-120W	1150lm	336PCS	5V/18W	608*231mm	3.2V/20A	720*256*57mm

Solar Street Lights



Poly solar panel



IP65



Color Temp.




LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



PIR Sensor



Light Control

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3106-30W	360lm	90PCS	5V/7W	300*186mm	3.2V/5A	384*207*57mm
RL3106-60W	720lm	180PCS	5V/11W	397*212mm	3.2V/10A	479*235*57mm
RL3106-90W	900lm	270PCS	5V/14W	508*228mm	3.2V/15A	618*256*57mm
RL3106-120W	1150lm	360PCS	5V/18W	608*231mm	3.2V/20A	720*256*57mm


Solar Street Lights



Poly solar panel



IP65



Color Temp.



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



PIR Sensor



Light Control

RL3107-180W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1200lm	344PCS	5V/18W	360*335mm	3.2V/15A	467*362*80mm
RL3107-240W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1600lm	578PCS	5V/27W	510*335mm	3.2V/23A	617*362*80mm
RL3107-300W	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
	1800lm	812PCS	5V/30W	590*335mm	3.2V/28A	698*362*80mm

Solar Street Lights




Poly solar panel



IP65



Color Temp.



Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL3109-20W	400lm	112PCS	4V/30W	570*345mm	3.2V/44A	575*365*160mm
RL3109-40W	600lm	224PCS	4V/60W	1093*345mm	3.2V/99A	1100*365*160mm
RL3109-60W	800lm	224PCS	4V/100W	1200*510mm	3.2V/154A	1202*530*160mm


Solar Street Lights



Poly solar panel



IP65



Color Temp.



RL6002



RL6003



RL6001



LED Type
SMD5730



Battery Type
LiFePO4



Charging Time
5-8hrs



Operation Time
10-12hrs



Remote Control



PIR Sensor



Light Control

Model	Lumen	Qty	PV Panel Spec	PV Panel Size	Battery Spec	Lamp Size
RL6001-150W	1200lm	320PCS	5V/18W	345*345mm	3.2V 10Ah	350*350*110mm
	1800lm	400PCS	5V/25W	D543mm	3.2V 27.5Ah	D550*125mm
RL6002-150W	1200lm	240PCS	5V/15W	D413mm	3.2V 16.5Ah	D420*120mm
	1800lm	400PCS	5V/25W	D543mm	3.2V 27.5Ah	D550*125mm
RL6002-300W	1200lm	240PCS	5V/15W	D413mm	3.2V 33Ah	D420*120mm
	1800lm	400PCS	5V/25W	D543mm	3.2V 44Ah	D550*125mm
RL6003-150W	1200lm	240PCS	5V/15W	D413mm	3.2V 33Ah	D420*120mm
	1800lm	400PCS	5V/25W	D543mm	3.2V 44Ah	D550*125mm
RL6003-300W	1200lm	240PCS	5V/15W	D413mm	3.2V 33Ah	D420*120mm
	1800lm	400PCS	5V/25W	D543mm	3.2V 44Ah	D550*125mm