

LED Lighting Catalogue

Office & Commercial **2022**






Panel Lights


Panel Lights

Ways to mount an aluminum frame panel light to the ceiling

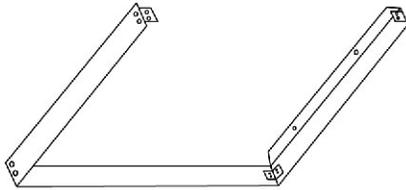


Step 1:

Twist off one side of AL frame screws and take out from constructure.

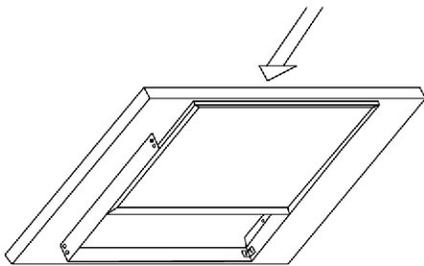


Step 2:

Fix the AL frame to the roof with M4 screws on both sides of drilling hole as illustration shown.

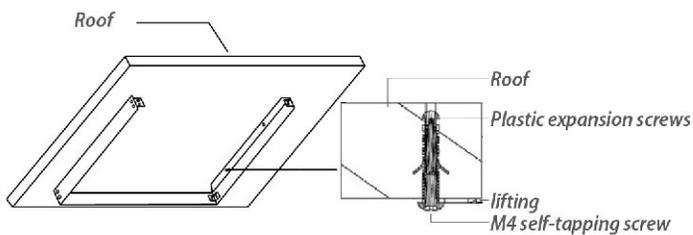

Step 3:

Placing the panel light in the slot of AL frame along the level line as required. Please ensure the panel light is recessed in a stable and even position.

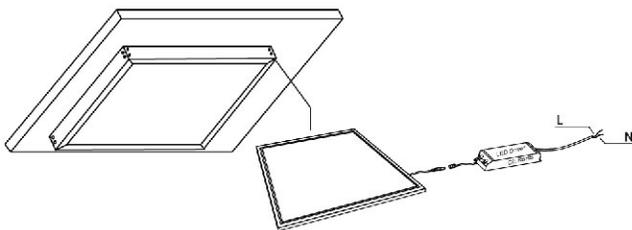

Step 4:


Connect the power driver to the panel hidden in lamp's back. Check the safety contacts. Tighten the missing constructure with screws to finish the installation.



Panel Lights


Spring mounted

Step 1:

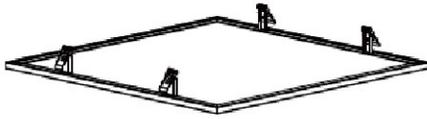


Fix 4pcs spring fasteners to the panel as shown.

Step 2:

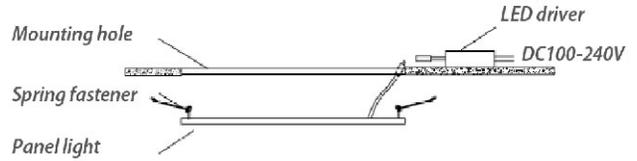


Connect the power input wire to the power supply, and the power output wire to the panel light.
Attention: turn off the power during this step.

Step 3:

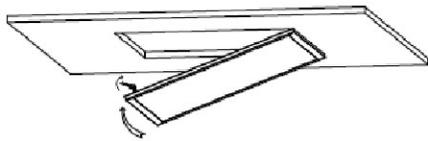

Fix panel lights to ceiling hole with springs.


Step 4:

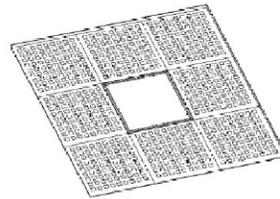

Installation finished.


Hanging installation

Step 1:




Fix the 4 sockets to the ceiling with screws.

Step 2:

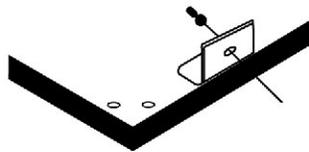


Screw the 4 ropes to the sockets.

Step 3:




Fix the ropes to the ceiling

Step 4:



Connect the ropes to the panel.

Step 5:

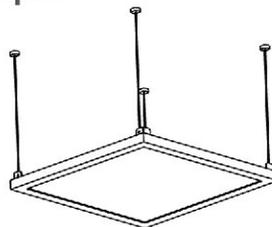

Installation finished.


Panel Lights **NEW**



100LM/W
120LM/W
130LM/W



220-240V
SMD4014
50 000
>0.9
≥80
120°
ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
PL1015-6060-30	220-240	30	3000	Alu.	50000	595*595*10	5/0.101/15.0
PL1015-30120-30	220-240	30	3000	Alu.	50000	295*1195*10	5/0.101/15.0
PL1015-6060-30	220-240	30	3900	Alu.	50000	595*595*10	5/0.101/15.0
PL1015-30120-30	220-240	30	3900	Alu.	50000	295*1195*10	5/0.101/15.0
PL1015-6060-40	220-240	40	4000	Alu.	50000	595*595*10	5/0.101/15.0
PL1015-30120-40	220-240	40	4000	Alu.	50000	295*1195*10	5/0.101/15.0
PL1015-6060-40	220-240	40	4800	Alu.	50000	595*595*10	5/0.101/15.0
PL1015-30120-40	220-240	40	4800	Alu.	50000	295*1195*10	5/0.101/15.0


Panel Lights



IP44



3000K 4000K 6500K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
PL1004-6060-32	220-240	32	3200	Alu.	50000	595*595*10	4/0.088/15.7
PL1004-30120-32	220-240	32	3200	Alu.	50000	295*1195*10	4/0.088/15.7
PL1004-6060-40	220-240	40	4000	Alu.	50000	595*595*10	4/0.088/15.7
PL1004-30120-40	220-240	40	4000	Alu.	50000	295*1195*10	4/0.088/15.7
PL1004-6060-45	220-240	45	4500	Alu.	50000	595*595*10	4/0.088/15.7
PL1004-30120-45	220-240	45	4500	Alu.	50000	295*1195*10	4/0.088/15.7

Panel Lights




IP65

Waterproof Drive



220-240V
SMD4014
50 000
>0.9
≥80
120°
ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m³/KG]
PL1011-6060-40	220-240	40	4000	Alu.	50000	595*595*10	4/0.088/15.7
PL1011-6060-40	220-240	40	4400	Alu.	50000	595*595*10	4/0.088/15.7

Panel Lights




Color Temp.
adjustable


Dimming
(0-10V / SCR / Dali)



Color Temp. adjustable



10-100% Dimming



PL1006 Driver

0-10V



SCR



Dali




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
PL1006-DIM-6060-36	220-240	36	3600	Alu.	50000	595*595*9	5/0.101/10.5
PL1006-DIM-30120-36	220-240	36	3600	Alu.	50000	295*1195*9	5/0.101/13.0
PL1006-DIM-6262-36	220-240	36	3600	Alu.	50000	620*620*9	5/0.108/10.5
PL1006-DIM-6060-40	220-240	40	4000	Alu.	50000	595*595*9	5/0.101/10.5
PL1006-DIM-30120-40	220-240	40	4000	Alu.	50000	295*1195*9	5/0.101/13.0
PL1006-DIM-6262-40	220-240	40	4000	Alu.	50000	620*620*9	5/0.108/10.5
PL1006-DIM-6060-45	220-240	45	4500	Alu.	50000	595*595*9	5/0.101/10.5
PL1006-DIM-30120-45	220-240	45	4500	Alu.	50000	295*1195*9	5/0.101/13.0
PL1006-DIM-3232-45	220-240	45	4500	Alu.	50000	620*620*9	5/0.108/10.5
PL1006-DIM-60120-60	220-240	60	6000	Alu.	50000	595*1195*9	4/0.124/13.0

Panel Lights






Color Temp.
adjustable

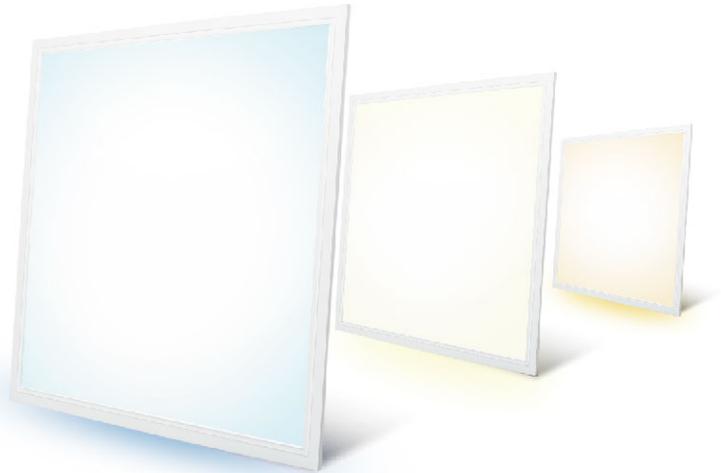

CCT Switchable



PL1008 CCT Switchable

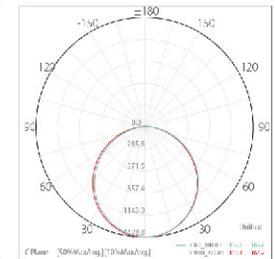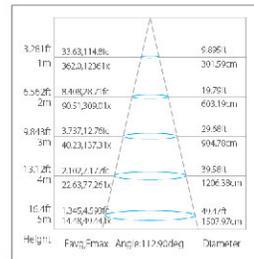

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
PL1008-6060-30	220-240	30	3000	≥80	>0.9	Alu.	50000	595*595*10	4 / 0.088 / 15.66
PL1008-30120-30	220-240	30	3300	≥80	>0.9	Alu.	50000	295*1195*10	4 / 0.088 / 15.66
PL1008-6060-30	220-240	30	3000	≥80	>0.9	Alu.	50000	595*595*10	4 / 0.088 / 15.66
PL1008-30120-30	220-240	30	3300	≥80	>0.9	Alu.	50000	295*1195*10	4 / 0.088 / 15.66
PL1008-6060-40	220-240	40	4000	≥80	>0.9	Alu.	50000	595*595*10	4 / 0.088 / 15.66
PL1008-30120-40	220-240	40	4000	≥80	>0.9	Alu.	50000	295*1195*10	4 / 0.088 / 15.66
PL1008-6060-40	220-240	40	4400	≥80	>0.9	Alu.	50000	595*595*10	4 / 0.088 / 15.66
PL1008-30120-40	220-240	40	4400	≥80	>0.9	Alu.	50000	295*1195*10	4 / 0.088 / 15.66

Panel Lights

Custom Patterns


Split joint



Application




Pattern customizable



[MORE >>>](#)

 220-240V	 SMD4014	 50 000	 >0.9	 ≥80	 120°	 ECO
--	---	--	---	---	--	---



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
PL1025-6060-40	220-240	40	/	≥80	>0.9	Alu.	50000	595*595*10	4 / 0.088 / 15.66


Panel Lights



UGR < 19



220-240V
SMD4014
50 000
>0.9
≥80
120°
ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
PL1002-6060-30	220-240	30	3000	Alu.	50000	595*595*10	5/0.101/15.7
PL1002-30120-30	220-240	30	3000	Alu.	50000	295*1195*10	5/0.101/15.7
PL1002-6060-40	220-240	40	4000	Alu.	50000	595*595*10	5/0.101/15.7
PL1002-30120-40	220-240	40	4000	Alu.	50000	295*1195*10	5/0.101/15.7
PL1002-6060-40	220-240	40	4400	Alu.	50000	595*595*10	5/0.101/15.7
PL1002-30120-40	220-240	40	4400	Alu.	50000	295*1195*10	5/0.101/15.7


Panel Lights



Economical





220-240V
 SMD4014
 50 000
 >0.5
 ≥70
 120°
 ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
PL1003-6060-36	220-240	36	2520	Alu.	50000	595*595*9	5/0.093/13.0
PL1003-30120-36	220-240	36	2520	Alu.	50000	295*1195*9	5/0.093/13.0
PL1003-6060-48	220-240	48	3360	Alu.	50000	595*595*9	5/0.093/13.0
PL1003-30120-48	220-240	48	3360	Alu.	50000	295*1195*9	5/0.110/13.0
PL1003-60120-72	220-240	72	5040	Alu.	50000	595*1195*9	2/0.114/13.0

Panel Lights

8 times packing capacity
compared with the ordinary panel

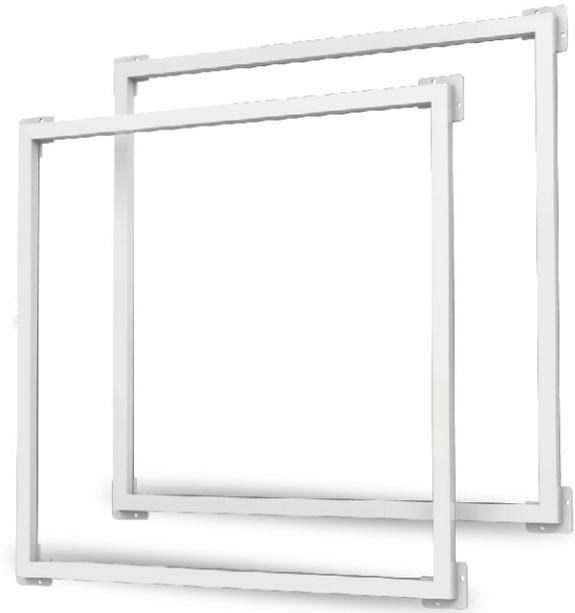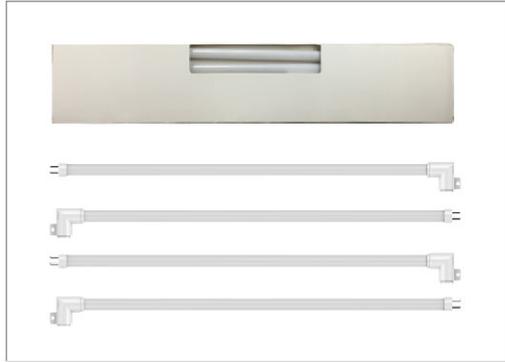

120LM/W
130LM/W




FEATURE


- It can contain 45000pcs panels in one container
- Easy disassembly and installation



Details

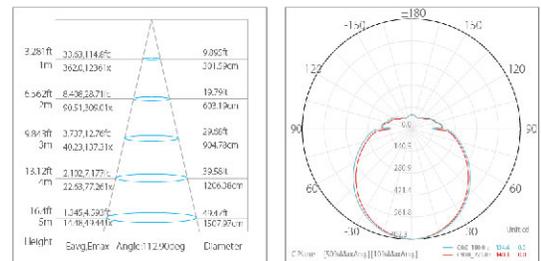


220-240V
SMD2835
50 000
>0.9
≥80
120°
ECO




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m³/KG]
PL1020-6060-40	220-240	40	4000	PC	50000	595*595*25	20/0.035/15.7
PL1020-6060-40	220-240	40	4800	PC	50000	595*595*25	20/0.035/15.7
PL1020-6060-40	220-240	40	5200	PC	50000	595*595*25	20/0.035/15.7

Panel Lights NEW

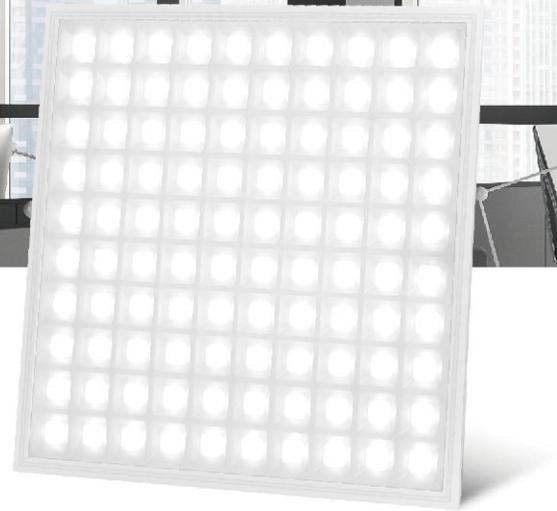

140LM/W
150LM/W

Details



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
PL2020-6060-30	220-240	30	4200	Alu.	50000	595*595*15	5/0.101/15.0
PL2020-6060-30	220-240	30	4500	Alu.	50000	595*595*15	5/0.101/15.0
PL2020-6060-40	220-240	40	5600	Alu.	50000	595*595*15	5/0.101/15.0

Panel Lights



Details




Lens



Backlit



Structure analysis

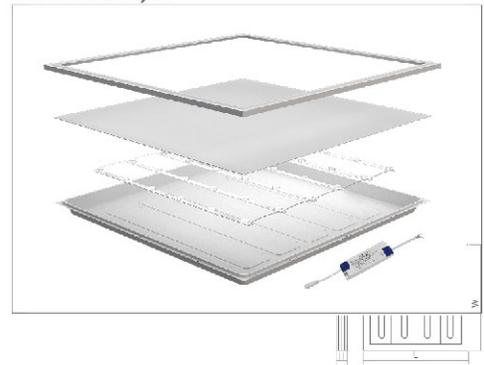

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
PL2015-6060-25	220-240	25	3000	≥80	>0.9	PP	50000	595*595*30	4 / 0.0360 / 6.6
PL2015-30120-25	220-240	25	3000	≥80	>0.9	PP	50000	295*1195*10	4 / 0.0360 / 6.6
PL2015-6060-25	220-240	25	3750	≥80	>0.9	PP	50000	595*595*30	4 / 0.0360 / 6.6
PL2015-30120-25	220-240	25	3750	≥80	>0.9	PP	50000	295*1195*10	4 / 0.0360 / 6.6
PL2015-6060-30	220-240	30	3000	≥80	>0.9	PP	50000	595*595*30	4 / 0.0360 / 6.6
PL2015-30120-30	220-240	30	3000	≥80	>0.9	PP	50000	295*1195*10	4 / 0.0360 / 6.6
PL2015-6060-30	220-240	30	3900	≥80	>0.9	PP	50000	595*595*30	4 / 0.0360 / 6.6
PL2015-30120-30	220-240	30	3900	≥80	>0.9	PP	50000	295*1195*10	4 / 0.0360 / 6.6
PL2015-6060-30	220-240	30	4500	≥80	>0.9	PP	50000	595*595*30	4 / 0.0360 / 6.6
PL2015-30120-30	220-240	30	4500	≥80	>0.9	PP	50000	295*1195*10	4 / 0.0360 / 6.6

Panel Lights

Remote control

RGB & CCT



Color Temp. adjustable




10-100% Dimming



RGB



Details



Item No.	Voltage (V)	Wattage (W)	Lumen (lm)	Material	Lifetime (H)	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
PL2006-CCT	220-240	30	2400	Alu.+PS	30000	450*450*30	4/0.061/11.0
PL2006-CCT	220-240	40	3200	Alu.+PS	30000	595*595*30	4/0.168/12.0
PL2006-RGBCCT	220-240	40	3200	Alu.+PS	30000	450*450*30	4/0.168/12.0
PL2006-RGBCCT	220-240	40	3200	Alu.+PS	30000	595*595*30	4/0.168/12.0

Panel Lights

APP Control

RGB & CCT



Color Temp. adjustable




10-100% Dimming



RGB



Application



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
PL2009-CCT	220-240	40	3200	≥80	>0.9	Alu.+PS	30000	595*595*30	4 / 0.168 / 12
PL2009-CCT	220-240	40	3200	≥80	>0.9	Alu.+PS	30000	295*1195*30	4 / 0.171 / 12
PL2009-RGBCCT	220-240	40	3200	≥80	>0.9	Alu.+PS	30000	595*595*30	4 / 0.168 / 12
PL2009-RGBCCT	220-240	40	3200	≥80	>0.9	Alu.+PS	30000	295*1195*30	4 / 0.171 / 12


Panel Lights



Economical



						
220-240V	SMD2835	50 000	>0.9	≥80	120°	ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
PL2004-6060-36	220-240	36	3000	≥80	>0.9	PP	50000	595*595*25	4 / 0.0360 / 6.6
PL2004-6060-48	220-240	48	3840	≥80	>0.9	PP	50000	595*595*25	4 / 0.0360 / 6.6

Panel Lights




120°
BEAM ANGLE



PL2002-D

PL2002-F

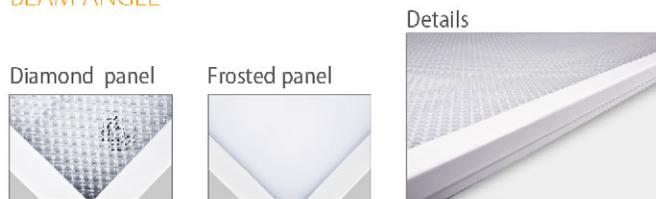


Diamond panel

Frosted panel

Details



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
PL2002-6060-24-D	220-240	24	2400	Iron	30000	595*595*19	4/0.036/6.6
PL2002-6060-24-F	220-240	24	2400	Iron	30000	180*1195*19	4/0.036/6.6
PL2002-6060-36-D	220-240	36	2800	Iron	30000	595*595*19	4/0.036/6.6
PL2002-6060-36-F	220-240	36	2800	Iron	30000	180*1195*19	4/0.036/6.6
PL2002-6060-45-D	220-240	45	4500	Iron	30000	595*595*19	4/0.036/6.6
PL2002-6060-45-F	220-240	45	4500	Iron	30000	180*1195*19	4/0.036/6.6
PL2002-6060-72-D	220-240	72	5040	Iron	30000	595*595*19	4/0.036/6.6
PL2002-6060-72-F	220-240	72	5040	Iron	30000	180*1195*19	4/0.036/6.6
PL2002-6060-96-D	220-240	96	10000	Iron	30000	595*595*19	4/0.036/6.6
PL2002-6060-96-F	220-240	96	10000	Iron	30000	180*1195*19	4/0.036/6.6







Lighting Fixtures


Lighting Fixtures NEW



Details

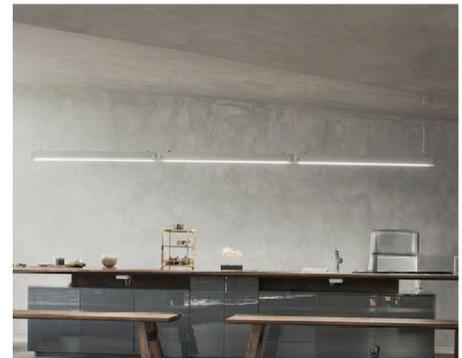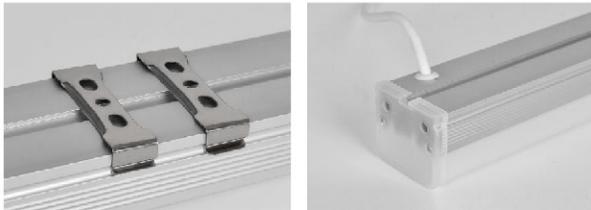

Accessories



					
220-240V	50 000	0.5	≥80	120°	ECO

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m³/KG]
LU1007-12-L-G1	220-240	12	960	Alu.+PC	50000	590*50*45	/
LU1007-24-L-G1	220-240	24	1920	Alu.+PC	50000	590*50*45	/
LU1007-36-L-G1	220-240	36	2880	Alu.+PC	50000	1180*50*45	/
LU1007-48-L-G1	220-240	48	3840	Alu.+PC	50000	1180*50*45	/

Lighting Fixtures

10000LM




Adjust power



3281R 1m	2362.148G 98.11.156K	98.9H 90.19mm
6562L 2m	8463.2871G 195.1309.31K	197.78H 90.19cm
9843R 3m	5.712.12.68G 102.41.17.51K	296.68H 90.19cm
1312L 4m	2.102.177K 226.377.251K	395.58H 120.33cm
164R 5m	1.381.6348G 1448.46244K	494.52H 150.37cm

Height: 50w/Emax: Ang: 21.2500deg Diameter

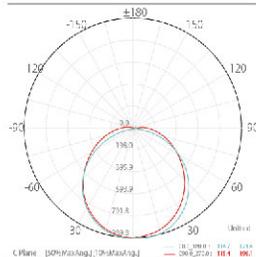

- 120V**
- SMD2835**
- 50 000**
- >0.9**
- ≥80**
- 120°**
- ECO**

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m³/KG]
LU1091-12-100	120	50/105	5000/10000	Iron+PC	50000	1122*106*50	12/0.060/7.0

Lighting Fixtures





Adjust power



Height	Beam Diameter					
32.81ft 10m	3363.11486	4673.17416	6283.19346	8403.26716	11203.34086	15123.41456
65.62ft 20m	1345.25942	1869.46586	2513.27822	3361.30706	4481.34302	5968.37706
98.43ft 30m	896.83961	1246.31057	1675.51881	2240.87139	2987.55503	3978.91159
131.24ft 40m	672.62971	934.73242	1250.38861	1680.65452	2240.87139	2987.55503
164.05ft 50m	538.10377	747.78594	1000.31089	1344.81961	1793.84302	2391.34377

Beam Angle: 120°

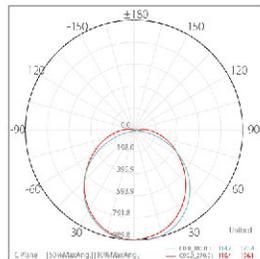

- 
120V
- 
SMD2835
- 
50 000
- 
>0.9
- 
≥80
- 
120°
- 
ECO

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU1093-36	120	36	3200	PC	50000	1170*43*49	8/0.030/5.0
LU1093-42	120	42	4000	PC	50000	1170*43*49	8/0.030/5.0
LU1093-52	120	52	5000	PC	50000	1170*43*49	8/0.030/5.0

Lighting Fixtures



Color Temp.
adjustable



Dimming



Emergency
3.5h/4w/400lm



Emergency push-button
Indicator light





Press the open button



Aluminium
Iron



Back details

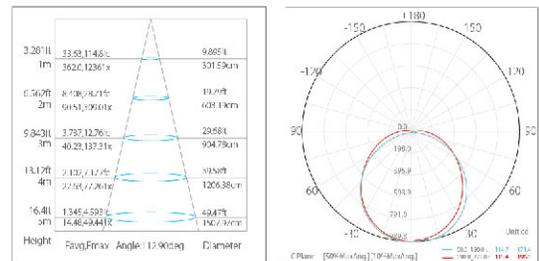

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU324C-20W2TDC-G1	220-240	20	2400	Iron+PC	30000	575*75*74	20/0.038/15.0
LU324C-40W2TDC-G1	220-240	40	4800	Iron+PC	30000	1173*75*74	20/0.049/21.0
LU324C-40W2TDCEM-G1	220-240	40	4800	Iron+PC	30000	1173*75*74	20/0.049/21.0

Lighting Fixtures



Color Temp.
adjustable



Emergency
3.5h/4w/400lm




Details



Emergency battery



3 CCT color adjustment


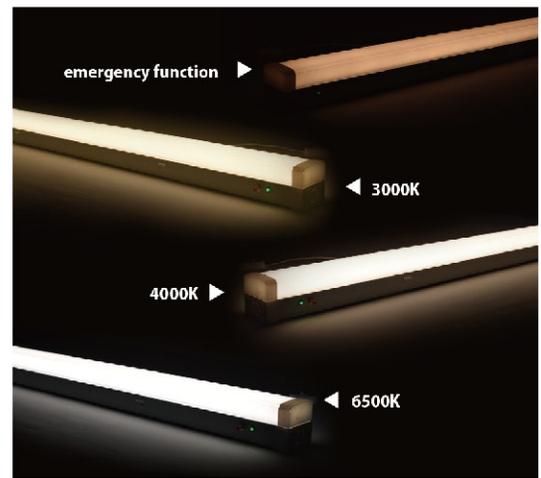


Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU325C/LU329C-20W-G1	220-240	20	2400	Iron+PC	30000	570*68*72	8/0.036/7.5
LU325C/LU329C-20W2TDC-G1	220-240	20	2400	Iron+PC	30000	570*68*72	8/0.036/7.5
LU325C/LU329C-40W-G1	220-240	40	4800	Iron+PC	30000	1170*68*72	8/0.071/13.0
LU325C/LU329C-40W2TDC-G1	220-240	40	4800	Iron+PC	30000	1170*68*72	8/0.071/13.0
LU325C/LU329C-40W2TDCFM-G1	220-240	40	4800	Iron+PC	30000	1170*68*72	8/0.071/15.5
LU325C/LU329C-60W2TDC-G1	220-240	60	7200	Iron+PC	30000	1470*68*72	4/0.047/8.5
LU325C/LU329C-60W2TDCFM-G1	220-240	60	7200	Iron+PC	30000	1470*68*72	4/0.047/9.5
LU325C/LU329C-80W2TDC-G1	220-240	80	9600	Iron+PC	30000	1770*68*72	4/0.056/10.0
LU325C/LU329C-80W2TDCFM-G1	220-240	80	9600	Iron+PC	30000	1770*68*72	4/0.056/11.0

Lighting Fixtures



Details

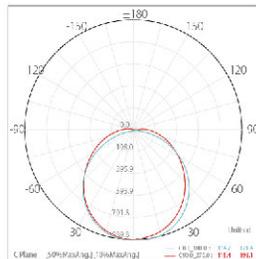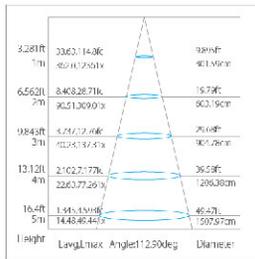

- 100-240V**
- SMD2835**
- 25 000**
- >0.9**
- ≥80**
- 120°**
- ECO**

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU1038-24	100-240	24	1920	Alu.+PS	25000	1180*35*70	8/0.020/6.5
LU1038-36	100-240	36	2880	Alu.+PS	25000	1180*50*70	6/0.025/7.5
LU1038-48	100-240	48	3840	Alu.+PS	25000	1180*70*70	6/0.030/8.5

Lighting Fixtures





Color Temp.
adjustable



Emergency
2.5h/3w/250lm



Details

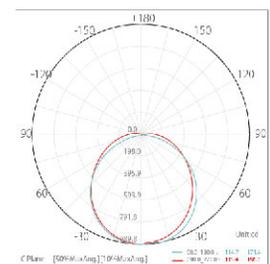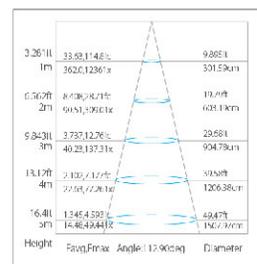

220-240V
SMD2835
30 000
>0.9
≥80
120°
ECO


Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU2061-20W-CCT	220-240	20	2400	Iron+PC	30000	600*80*48	20/0.038/15.0
LU2061-40W-CCT	220-240	40	4800	Iron+PC	30000	1200*80*48	20/0.049/21.0
LU2061-60W-CCT	220-240	60	7200	Iron+PC	30000	1500*80*48	20/0.049/21.0
LU2061-80W-CCT	220-240	80	9600	Iron+PC	30000	1800*80*48	20/0.066/25.0

Lighting Fixtures

80mm Width



Details

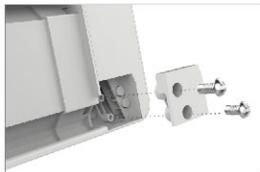


Back details



Application: Office, Basement, Supermarket, etc.



Installation diagram



220-240V SMD2835 30 000 >0.9 ≥80 120° ECO

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU2026-20W-C	220-240	20	2000	Alu.+PC	30000	600*80*32	36/0.076/6.3
LU2026-40W-C	220-240	40	4000	Alu.+PC	30000	1200*80*32	10/0.149/11.0



Lighting Fixtures

120mm Width

IP65



Details

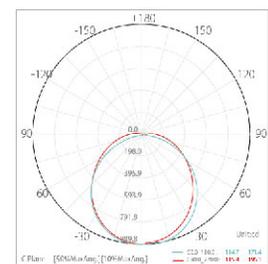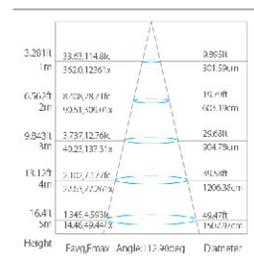

- 220-240V**
- SMD2835**
- 30 000**
- >0.9**
- ≥80**
- 120°**
- ECO**

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m³/KG]
LU2051-25-E-B1	220-240	25	2500	PC	30000	600*120*35	30/0.100/16.0
LU2051-40-E-B1	220-240	40	4000	PC	30000	900*120*35	30/0.120/17.0
LU2051-50-E-B1	220-240	50	5000	PC	30000	1200*120*35	20/0.135/18.5
LU2051-80-E-B1	220-240	80	8000	PC	30000	1500*120*35	20/0.169/23.7


Lighting Fixtures

T8 Batten

Economical



Bracket + T8 tube = T8

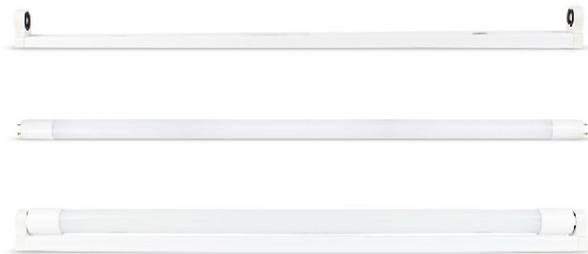

Installation diagram



Item No.	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
LU2052-06-D	Iron	20000	612*33*51	50/0.017/6.0
LU2052-06-S	Iron	20000	612*72*51	50/0.017/6.5
LU2052-12-D	Iron	20000	1218*33*51	50/0.033/10.5
LU2052-12-S	Iron	20000	1218*72*51	50/0.033/11.0
LU2052-15-S	Iron	20000	1518*33*51	50/0.040/12.5
LU2052-15-D	Iron	20000	1518*72*51	50/0.040/13.0


Lighting Fixtures NEW





Connectors



Shadow free and connectable up to 12 pieces at a time.

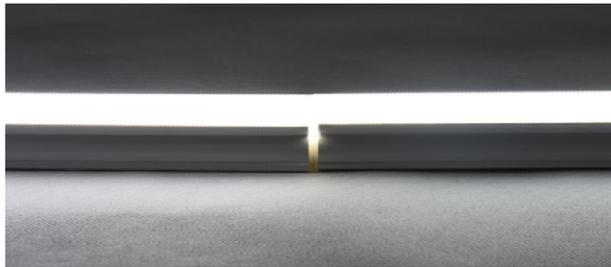

Installation diagram

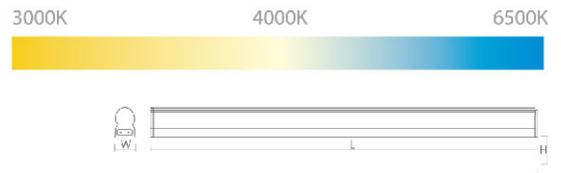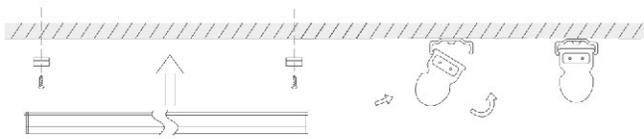

220-240V

50 000

0.5

≥80

120°

ECO

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU2027-U2-4-L	220-240	4	320	PC	50000	305*23*35	/
LU2027-U2-8-L	220-240	8	640	PC	50000	570*23*35	/
LU2027-U2-12-L	220-240	12	960	PC	50000	970*23*35	/
LU2027-U2-16-L	220-240	16	1280	PC	50000	1170*23*35	/

Lighting Fixtures

Dial switch




Color Temp. adjustable



Details



3000K 4000K 6500K

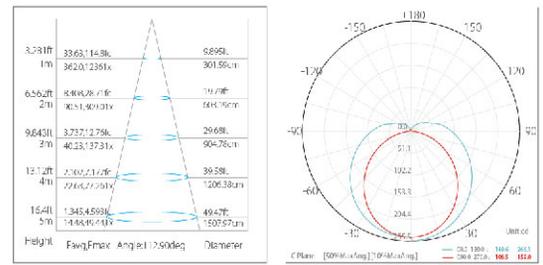

220-240V
 SMD2835
 30 000
 >0.5
 ≥80
 120°
 ECO

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU2039-4-CCT-E2	220-240	4	400	PC	30000	313*21*32	30/0.031/4.8
LU2039-9-CCT-E2	220-240	9	800	PC	30000	573*21*32	30/0.052/6.2
LU2039-13-CCT-E2	220-240	13	1300	PC	30000	873*21*32	30/0.056/7.7
LU2039-18-CCT-E2	220-240	18	1800	PC	30000	1173*21*32	20/0.075/9.1
LU2039-21-CCT-E2	220-240	21	2100	PC	30000	1473*21*32	20/0.094/13.0

Lighting Fixtures

Connectable Shadow-free T5 Led Batten




Accessories





Connectors



Shadow free and connectable up to 12 pieces at a time.

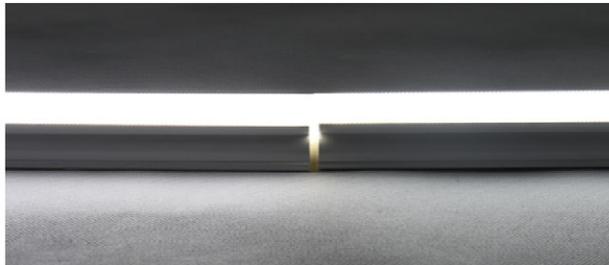

Installation diagram

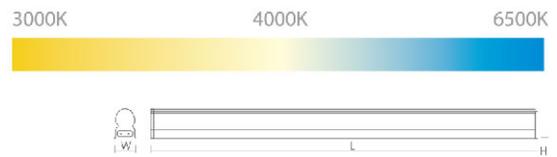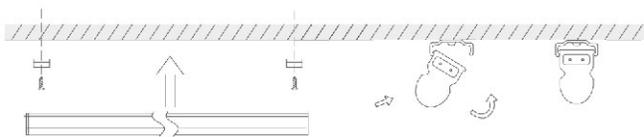

100-240V
 SMD2835
 30 000
 >0.5
 ≥80
 120°
 ECO

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m³/KG]
LU2027	100-240	4	320	PC	30000	305*22*32	20/0.046/6.0
LU2027	100-240	8	640	PC	30000	570*22*32	20/0.087/9.5
LU2027	100-240	12	960	PC	30000	870*22*32	12/0.060/7.0
LU2027	100-240	16	1280	PC	30000	1170*22*32	12/0.580/6.0

Lighting Fixtures

80mm Width




Application: Office, Basement, Supermarket, etc.

Details



Installation diagram



Item No.	Voltage (V)	Wattage (W)	Lumen (lm)	Material	Lifetime (H)	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU2008-03-5	220-240	5	400	PVC+PC	20000	300*23*32	36/0.030/2.5
LU2008-06-9	220-240	9	720	PVC+PC	20000	600*23*32	30/0.050/4.6
LU2008-09-14	220-240	14	1120	PVC+PC	20000	1200*23*32	30/0.070/6.7
LU2008-12-18	220-240	18	1440	PVC+PC	20000	1500*23*32	30/0.090/8.4

Lighting Fixtures

75mm Width



LU2006(Alu.)



LU2064(PC)

LU2016(iron)



Three options for the cover:

Connectable & switch & non-connectable

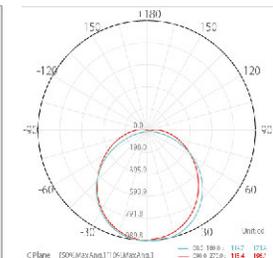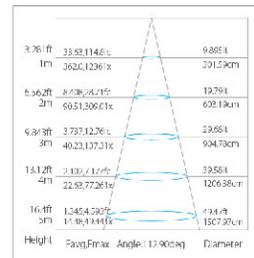

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m²/KG]
LU2006-03-9	100-240	9	720	Alu.	20000	300*75*23	20/0.038/15.0
LU2006-06-18	100-240	18	1440	Alu.	20000	600*75*23	20/0.049/21.0
LU2006-12-36	100-240	36	2880	Alu.	20000	1200*75*23	20/0.660/25.0
LU2006-15-45	100-240	45	4320	Alu.	20000	1500*75*23	20/0.072/23.0
LU2064-03-9	100-240	9	900	PC	20000	300*75*23	20/0.038/15.0
LU2064-06-18	100-240	18	1800	PC	20000	600*75*23	20/0.049/21.0
LU2064-12-36	100-240	36	3600	PC	20000	1200*75*23	20/0.660/25.0
LU2064-15-45	100-240	45	4800	PC	20000	1500*75*23	20/0.072/23.0
LU2016-03-9	100-240	9	630	Iron	15000	300*75*23	20/0.038/15.0
LU2016-06-18	100-240	18	1260	Iron	15000	600*75*23	20/0.049/21.0
LU2016-12-36	100-240	36	2520	Iron	15000	1200*75*23	20/0.660/25.0
LU2016-15-45	100-240	45	3150	Iron	15000	1500*75*23	20/0.072/23.0

Lighting Fixtures

65mm Width




LU2036

LU2036-L



Details

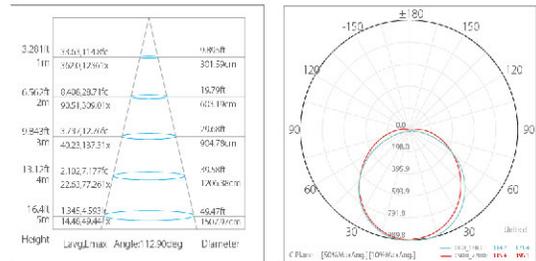

100-240V
SMD2835
20 000
>0.5
≥70
120°
ECO

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
LU2036-03-9	100-240	9	630	Iron+PC/PS	20000	300*65*25	20/0.038/15.0
LU2036-06-18	100-240	18	1260	Iron+PC/PS	20000	600*65*25	20/0.049/21.0
LU2036-12-36	100-240	36	2520	Iron+PC/PS	20000	1200*65*25	20/0.660/25.0
LU2036-15-48	100-240	48	3150	Iron+PC/PS	20000	1500*65*25	20/0.072/23.0



Office Downlights

Office Downlights


Cut-out Size Adjustable




Color Temp. adjustable





1.Surface mounted

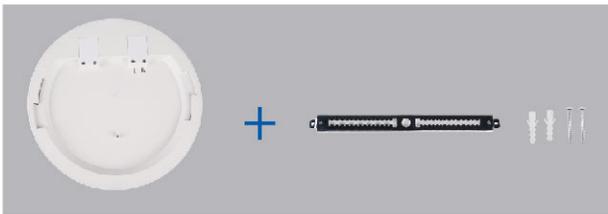

2.Embedded

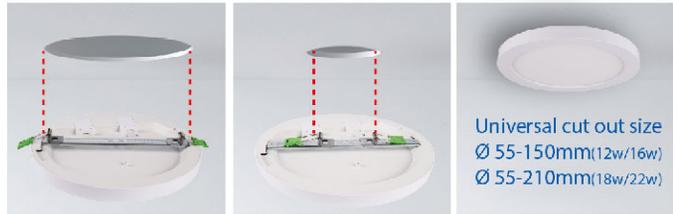

Microwave Sensor

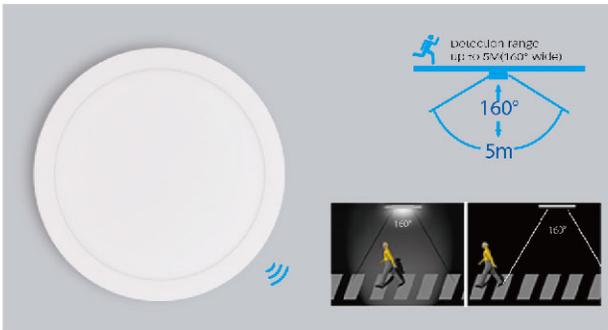

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1030-6-CCT	220-240	6	480	80	>0.5	ABS+PA	30000	Ø150*22	Ø55-110	40 / 0.04 / 7
AL1030-12-CCT	220-240	12	960	≥80	>0.5	ABS+PA	30000	Ø175*22	Ø55-150	40 / 0.06 / 10.3
AL1030-18-CCT	220-240	18	1440	≥80	>0.5	ABS+PA	30000	Ø240*22	Ø55-130	20 / 0.04 / 6.8
AL1030S-18-CCT	220-240	18	1440	≥80	>0.5	ABS+PA	30000	Ø240*22	Ø55-210	20 / 0.04 / 6.8

Office Downlights



Color Temp.
adjustable




Dimming



Details



Dialup dimming

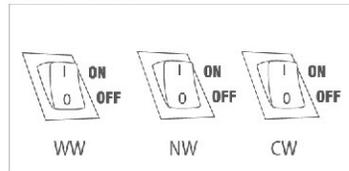


SMD2835



120°



ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1016-6	220-240	6	480	≥80	>0.5	PC	30000	Ø115*27	Ø100	40 / 0.045 / 10.5
AL1016-10	220-240	10	800	≥80	>0.5	PC	30000	Ø170*27	Ø150	40 / 0.078 / 14.5
AL1016-16	220-240	16	1280	≥80	>0.5	PC	30000	Ø220*27	Ø200	20 / 0.055 / 10
AL1016-22	220-240	22	1760	≥80	>0.5	PC	30000	Ø240*39	Ø220	20 / 0.064 / 12
AL1016-7-T	220-240	7	560	≥80	>0.5	PC	30000	Ø115*27	Ø100	40 / 0.045 / 10.5
AL1016-13-T	220-240	13	1040	≥80	>0.5	PC	30000	Ø170*27	Ø150	40 / 0.078 / 14.5
AL1016-17-T	220-240	17	1360	≥80	>0.5	PC	30000	Ø220*27	Ø200	20 / 0.055 / 10
AL1016-23-T	220-240	23	1840	≥80	>0.5	PC	30000	Ø240*39	Ø220	20 / 0.064 / 12

Office Downlights

Surface Mounted and Embedded



AL1088




AL1089



Details



Back

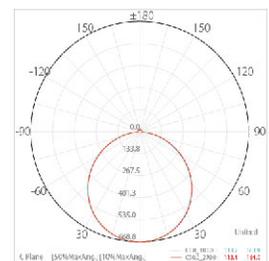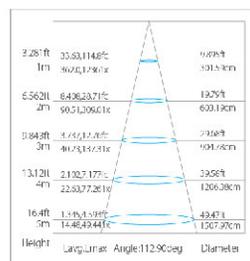

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
AL1088-6	100-240	6	360	≥70	>0.5	ABS	30000	Ø118*33	Ø95	40 / 0.039 / 15.6
AL1088-9	100-240	9	580	≥70	>0.5	ABS	30000	Ø143*33	Ø125	40 / 0.059 / 23.6
AL1088-12	100-240	12	900	≥70	>0.5	ABS	30000	Ø170*33	Ø150	40 / 0.059 / 23.6
AL1088-15	100-240	15	1120	≥70	>0.5	ABS	30000	Ø193*33	Ø170	20 / 0.049 / 9.8
AL1088-18	100-240	18	1440	≥70	>0.5	ABS	30000	Ø223*33	Ø200	20 / 0.049 / 9.8
AL1089-6	100-240	6	360	≥70	>0.5	ABS	30000	118*118*33	Ø95	40 / 0.039 / 15.6
AL1089-9	100-240	9	580	≥70	>0.5	ABS	30000	143*143*33	Ø125	40 / 0.059 / 23.6
AL1089-12	100-240	12	900	≥70	>0.5	ABS	30000	170*170*33	Ø150	40 / 0.059 / 23.6
AL1089-15	100-240	15	1120	≥70	>0.5	ABS	30000	193*193*33	Ø170	20 / 0.049 / 9.8
AL1089-18	100-240	18	1440	≥70	>0.5	ABS	30000	223*223*33	Ø200	20 / 0.049 / 9.8

Office Downlights



Adjustable Opening Hole


Details



Side




Cut-out size adjustable

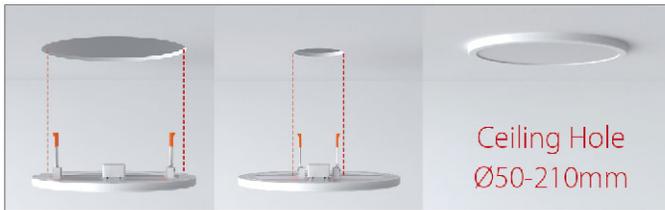








Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1055-6	100-240	6	300	≥70	>0.5	PC	30000	Ø100*20	Ø50-90	100 / 0.049 / 10.8
AL1055-8	100-240	8	400	≥70	>0.5	PC	30000	Ø115*20	Ø50-100	100 / 0.049 / 13.2
AL1055-15	100-240	15	870	≥70	>0.5	PC	30000	Ø175*20	Ø50-160	20 / 0.66 / 25
AL1055-18	100-240	18	1200	≥70	>0.5	PC	30000	Ø230*20	Ø50-210	20 / 0.072 / 23

Office Downlights



AL1001

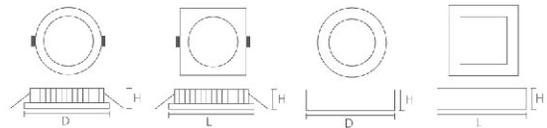

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
AL1001-3	220-240	3	120	≥80	>0.5	Alu.	30000	Ø85*13	Ø65	40 / 0.039 / 15.6
AL1001-6	220-240	6	300	≥80	>0.5	Alu.	30000	Ø120*13	Ø105	40 / 0.059 / 23.6
AL1001-9	220-240	9	500	≥80	>0.5	Alu.	30000	Ø145*13	Ø130	40 / 0.059 / 23.6
AL1001-12	220-240	12	720	≥80	>0.5	Alu.	30000	Ø174*13	Ø164	20 / 0.049 / 9.8
AL1001-15	220-240	15	900	≥80	>0.5	Alu.	30000	Ø200*13	Ø180	20 / 0.049 / 9.8
AL1001-18	220-240	18	1200	≥80	>0.5	Alu.	30000	Ø225*13	Ø205	20 / 0.049 / 9.8
AL1001-24	220-240	24	1600	≥80	>0.5	Alu.	30000	Ø300*13	Ø280	20 / 0.049 / 9.8
AL1002-3	220-240	3	120	≥80	>0.5	Alu.	30000	85*85*13	Ø65	40 / 0.039 / 15.6
AL1002-6	220-240	6	300	≥80	>0.5	Alu.	30000	120*120*13	Ø105	40 / 0.059 / 23.6
AL1002-9	220-240	9	500	≥80	>0.5	Alu.	30000	145*145*13	Ø130	40 / 0.059 / 23.6
AL1002-12	220-240	12	720	≥80	>0.5	Alu.	30000	174*174*13	Ø164	20 / 0.049 / 9.8
AL1002-15	220-240	15	900	≥80	>0.5	Alu.	30000	200*200*13	Ø180	20 / 0.049 / 9.8
AL1002-18	220-240	18	1200	≥80	>0.5	Alu.	30000	225*225*13	Ø205	20 / 0.049 / 9.8
AL1002-24	220-240	24	1600	≥80	>0.5	Alu.	30000	300*300*13	Ø280	20 / 0.049 / 9.8
AL1003-6	220-240	6	300	≥80	>0.5	Alu.	30000	Ø120*28 / Ø105*28	/	40 / 0.059 / 23.6
AL1003-12	220-240	12	720	≥80	>0.5	Alu.	30000	Ø174*28 / Ø160*28	/	20 / 0.049 / 9.8
AL1003-18	220-240	18	1200	≥80	>0.5	Alu.	30000	Ø225*28 / Ø205*28	/	20 / 0.049 / 9.8
AL1003-24	220-240	24	1600	≥80	>0.5	Alu.	30000	Ø300*28 / Ø280*28	/	20 / 0.049 / 9.8
AL1004-6	220-240	6	300	≥80	>0.5	Alu.	30000	120*120*13 / 105*105*28	/	40 / 0.039 / 15.6
AL1004-12	220-240	12	720	≥80	>0.5	Alu.	30000	174*174*13 / 105*105*28	/	40 / 0.059 / 23.6
AL1004-18	220-240	18	1200	≥80	>0.5	Alu.	30000	225*225*13 / 205*205*28	/	20 / 0.049 / 9.8
AL1004-24	220-240	24	1600	≥80	>0.5	Alu.	30000	300*300*13 / 280*280*28	/	20 / 0.049 / 9.8

Office Downlights




Details







SMD2835 **120°** **ECO**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL2035-6W	220-240	6+6	450	≥70	>0.5	Alu.+PP	30000	Ø95	Ø70	100 / 0.035 / 10
AL2035-12W	220-240	12+12	900	≥70	>0.5	Alu.+PP	30000	Ø120	Ø90	100 / 0.05 / 13
AL2035-24W	220-240	24+24	1920	≥70	>0.5	Alu.+PP	30000	Ø170	Ø120	40 / 0.04 / 10
AL2035-36W	220-240	36+36	2880	≥70	>0.5	Alu.+PP	30000	Ø225	Ø180	40 / 0.07 / 15

Office Downlights



≥80



>0.9



30000



SMD2835




120°



ECO

AL1005-P

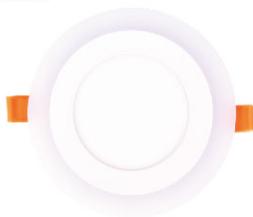

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1005-P-3	100-240	3+3	120	Alu.	Ø105*20	Ø75	30 / 0.083 / 12.5
AL1005-P-6	100-240	6+3	300	Alu.	Ø145*20	Ø105	30 / 0.083 / 12.5
AL1005-P-12	100-240	12+4	700	Alu.	Ø195*20	Ø155	30 / 0.083 / 12.5
AL1005-P-18	100-240	18+6	1200	Alu.	Ø245*20	Ø210	30 / 0.083 / 12.5

AL1005-X



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1005-X-3	100-240	3+3	120	Alu.	Ø120*20	Ø75	30 / 0.083 / 12.5
AL1005-X-6	100-240	6+3	300	Alu.	Ø160*20	Ø105	30 / 0.083 / 12.5
AL1005-X-12	100-240	12+4	700	Alu.	Ø210*20	Ø155	30 / 0.083 / 12.5
AL1005-X-18	100-240	18+6	1200	Alu.	Ø265*20	Ø210	30 / 0.083 / 12.5

AL1005-H



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1005-H-3	100-240	3+3	120	Alu.	Ø125*20	Ø75	30 / 0.083 / 12.5
AL1005-H-6	100-240	6+3	300	Alu.	Ø165*20	Ø105	30 / 0.083 / 12.5
AL1005-H-12	100-240	12+4	700	Alu.	Ø200*20	Ø155	30 / 0.083 / 12.5
AL1005-H-18	100-240	18+6	1200	Alu.	Ø250*20	Ø210	30 / 0.083 / 12.5

AL1005-S



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1005-S-3	100-240	3+3	120	Alu.	Ø105*20	Ø75	30 / 0.083 / 12.5
AL1005-S-6	100-240	6+3	300	Alu.	Ø145*20	Ø105	30 / 0.083 / 12.5
AL1005-S-12	100-240	12+4	700	Alu.	Ø195*20	Ø155	30 / 0.083 / 12.5
AL1005-S-18	100-240	18+6	1200	Alu.	Ø245*20	Ø210	30 / 0.083 / 12.5

AL1005-Y



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1005-Y-3	100-240	3+3	120	Alu.	Ø105*20	Ø75	30 / 0.083 / 12.5
AL1005-Y-6	100-240	6+3	300	Alu.	Ø145*20	Ø105	30 / 0.083 / 12.5
AL1005-Y-12	100-240	12+4	700	Alu.	Ø195*20	Ø155	30 / 0.083 / 12.5
AL1005-Y-18	100-240	18+6	1200	Alu.	Ø245*20	Ø210	30 / 0.083 / 12.5

Office Downlights



AL1015-P



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Packing [Pcs / M ³ / KG]
AL1015-P-3	100-240	3+3	90	Alu.	Ø105*32	100 / 0.056 / 12
AL1015-P-6	100-240	6+3	180	Alu.	Ø145*32	50 / 0.062 / 12
AL1015-P-12	100-240	12+4	480	Alu.	Ø195*32	30 / 0.062 / 12
AL1015-P-18	100-240	18+6	850	Alu.	Ø245*32	20 / 0.064 / 12

AL1015-QH



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Packing [Pcs / M ³ / KG]
AL1015-QH-3	100-240	3+3	90	Alu.	Ø120*32	100 / 0.056 / 12
AL1015-QH-6	100-240	6+3	180	Alu.	Ø165*32	50 / 0.062 / 12
AL1015-QH-12	100-240	12+4	480	Alu.	Ø200*32	30 / 0.062 / 12
AL1015-QH-18	100-240	18+6	850	Alu.	Ø250*32	20 / 0.064 / 12

AL1015-DH



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Packing [Pcs / M ³ / KG]
AL1015-DH-3	100-240	3+3	90	Alu.	Ø120*32	100 / 0.056 / 12
AL1015-DH-6	100-240	6+3	180	Alu.	Ø160*32	50 / 0.062 / 12
AL1015-DH-12	100-240	12+4	480	Alu.	Ø210*32	30 / 0.062 / 12
AL1015-DH-18	100-240	18+6	850	Alu.	Ø250*32	20 / 0.064 / 12

AL1015-DH



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Packing [Pcs / M ³ / KG]
AL1015-DH-3	100-240	3+3	90	Alu.	Ø120*32	100 / 0.056 / 12
AL1015-DH-6	100-240	6+3	180	Alu.	Ø160*32	50 / 0.062 / 12
AL1015-DH-12	100-240	12+4	480	Alu.	Ø210*32	30 / 0.062 / 12
AL1015-DH-18	100-240	18+6	850	Alu.	Ø250*32	20 / 0.064 / 12

AL1015-H



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Size [mm]	Packing [Pcs / M ³ / KG]
AL1015-H-3	100-240	3+3	90	Alu.	Ø120*32	100 / 0.056 / 12
AL1015-H-6	100-240	6+3	180	Alu.	Ø165*32	50 / 0.062 / 12
AL1015-H-12	100-240	12+4	480	Alu.	Ø200*32	30 / 0.062 / 12
AL1015-H-18	100-240	18+6	850	Alu.	Ø250*32	20 / 0.064 / 12

Office Downlights



ALLSTAR




Adjustable Opening Hole



Many choices for circle ring



3000K 4000K 6500K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
AL2099-6	100-240	6	480	≥80	>0.9	Iron	30000	Ø120*31	Ø100	100 / 0.09 / 7.5
AL2099-12	100-240	12	960	≥80	>0.9	Iron	30000	Ø120*31	Ø100	40 / 0.05 / 9.0
AL2099-18	100-240	18	1440	≥80	>0.9	Iron	30000	Ø170*31	Ø150	40 / 0.07 / 10.3
AL2099-24	100-240	24	1920	≥80	>0.9	Iron	30000	Ø220*32	Ø200	20 / 0.04 / 6.8
AL2099-30	100-240	30	2400	≥80	>0.9	Iron	30000	Ø300*32	Ø280	20 / 0.04 / 6.8

Office Downlights



AL2085



AL2085



AL2095



AL2086



AL2096




SMD2835



120°



ECO

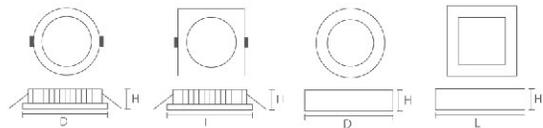

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³]
AL2085-04	220-240	4	240	≥80	>0.5	PC	30000	Ø98*25.5	Ø80	90 / 0.036
AL2085-06	220-240	6	390	≥80	>0.5	PC	30000	Ø118*25.5	Ø100	90 / 0.049
AL2085-09	220-240	9	630	≥80	>0.5	PC	30000	Ø145*25.5	Ø120	60 / 0.049
AL2085-15	220-240	15	1250	≥80	>0.5	PC	30000	Ø175*26.5	Ø150	30 / 0.038
AL2085-20	220-240	20	1700	≥80	>0.5	PC	30000	Ø222*27.5	Ø200	30 / 0.059
AL2086-06	220-240	6	420	≥80	>0.5	PC	30000	120*120*26.5	Ø100	90 / 0.066
AL2086-10	220-240	10	750	≥80	>0.5	PC	30000	145*145*26.5	Ø120	60 / 0.063
AL2086-16	220-240	16	1280	≥80	>0.5	PC	30000	175*175*26.5	Ø150	30 / 0.046
AL2086-22	220-240	22	1980	≥80	>0.5	PC	30000	224*224*27.5	Ø200	30 / 0.074
AL2095-06	220-240	6	420	≥80	>0.5	PC	30000	Ø123*35	/	90 / 0.068
AL2095-12	220-240	12	960	≥80	>0.5	PC	30000	Ø174*35	/	30 / 0.047
AL2095-18	220-240	18	1620	≥80	>0.5	PC	30000	Ø226*35	/	30 / 0.073
AL2096-06	220-240	6	420	≥80	>0.5	PC	30000	Ø122*35	/	90 / 0.068
AL2096-12	220-240	12	960	≥80	>0.5	PC	30000	Ø173*35	/	30 / 0.047
AL2096-18	220-240	18	1620	≥80	>0.5	PC	30000	Ø226*35	/	30 / 0.073

Office Downlights

Frameless




AL2201

AL2202



Details



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL2201/2202-9	100-265	9	675	≥70	>0.5	PP	20000	Ø85*16	Ø65	100 / 0.03 / 7.5
AL2201/2202-18	100-265	18	1440	≥70	>0.5	PP	20000	Ø120*16	Ø90	100 / 0.05 / 9.0
AL2201/2202-24	100-265	24	2040	≥70	>0.5	PP	20000	Ø170*16	Ø135	40 / 0.05 / 10.3
AL2201/2202-36	100-265	36	3240	≥70	>0.5	PP	20000	Ø225*16	Ø185	30 / 0.06 / 6.8

Office Downlights



AL2003

Back




Terminal



AL2010



 **SMD2835**
 **120°**
 **ECO**

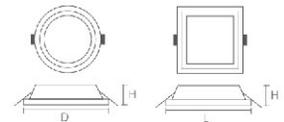

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL2003 / 2010-6	100-240	6	240	≥70	>0.5	Alu.	20000	ø100*35 / 100*100*35	ø80	100 / 0.09 / 7.5
AL2003 / 2010-12	100-240	12	580	≥70	>0.5	Alu.	20000	ø160*35 / 160*160*35	ø135	40 / 0.05 / 9.0
AL2003 / 2010-18	100-240	18	1000	≥70	>0.5	Alu.	20000	ø200*35 / 200*200*35	ø175	40 / 0.07 / 10.3
AL2003 / 2010-24	100-240	24	1400	≥70	>0.5	Alu.	20000	ø260*35 / 260*260*35	ø205	20 / 0.04 / 6.8

Office Downlights





Color Temp. adjustable



Dimmable




Details

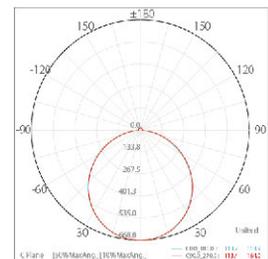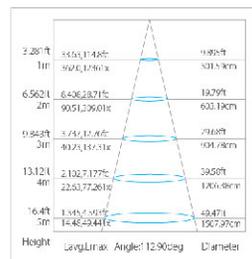

SMD2835

110°

ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
AL2005	220-240	9	800	>80	>0.9	PA	30000	Ø110*60	Ø92	20 / 0.044 / 6.7

Office Downlights



Color Temp.
adjustable







Dimmable

100 LM/W



Dialup dimming

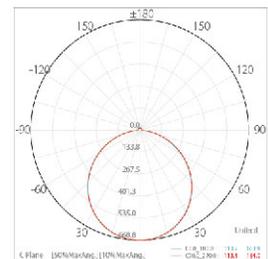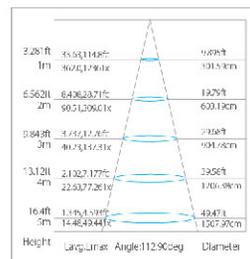

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [h]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL2016	220-240	7	700	≥80	>0.9	PP	30000	Ø105*48	Ø85	36 / 0.05 / 9

Office Downlights



Color Temp.
adjustable



Dimmable
adjustable

100 LM/W






RoHS



IC-4



Dialup dimming

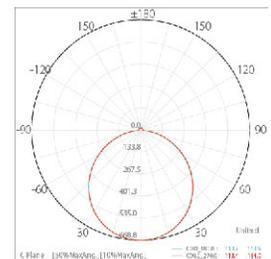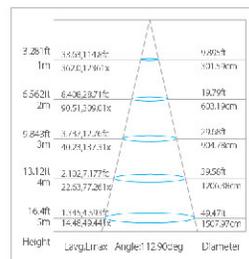

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
AL2017-8	220-240	8	800	≥80	>0.9	PA	30000	Ø105*58	Ø85	36 / 0.05 / 9



Office Downlights



Dialup dimming



Installation

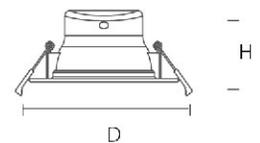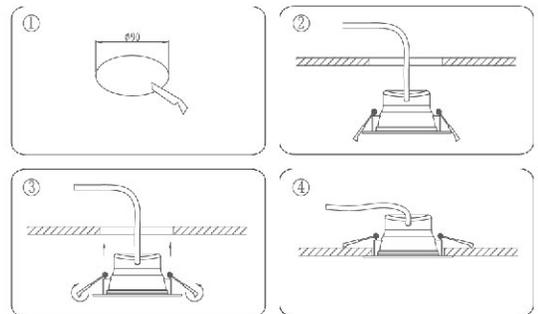

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL5006	220-240	8	700	≥80	>0.9	PBT+Alu.+PS	40000	Ø110*52	Ø 90	20 / 0.025 / 5.1

Office Downlights



Color Temp.
adjustable




Dialup dimming



Products



Installation

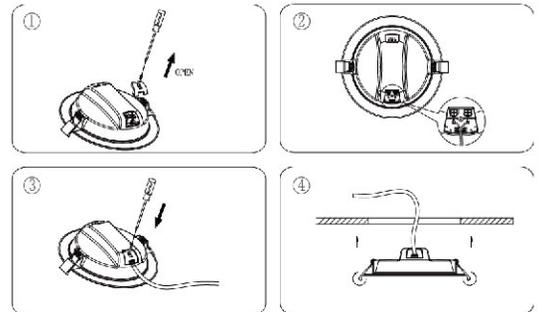

SMD2835



120°



ECO

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [D*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL2006-9	185-265	9	585	≥80	>0.5	PA+PS	30000	Ø115*45	Ø100	40 / 0.0438 / 6.6
AL2006-15	185-265	15	1200	≥80	>0.5	PA+PS	30000	Ø165*45	Ø150	30 / 0.0635 / 8.5
AL2006-20	185-265	20	1600	≥80	>0.5	PA+PS	30000	Ø220*45	Ø200	20 / 0.0726 / 9.1
AL2006-24	185-265	24	1920	≥80	>0.5	PA+PS	30000	Ø245*45	Ø225	20 / 0.088 / 10.4

Office Downlights



Color Temp.
adjustable




Dimmable

Dialup dimming



3000K 4000K 6500K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL5007-10	220-240	10	800	≥80	>0.9	PA	30000	Ø110*40	Ø90	30 /0.07 / 7.5
				≥80	>0.9	PA	30000	Ø110*40	Ø90	30 /0.07 / 7.5

Office Downlights



Color Temp. adjustable



Infrared sensor



Dialup dimming



3000K 4000K 6500K




SMD2835



120°



ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
AL5007S-10	220-240	10	800	≥80	>0.9	PA	30000	Ø110*40	Ø90	30 / 0.07 / 7.5

Office Downlights



Dimmable



Color Temp. adjustable





IC-4

Details



3000K 4000K 6500K

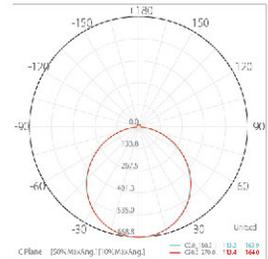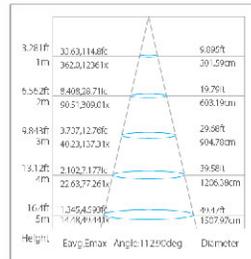


SMD2835



120°



ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
CE										
AL2018-7	220-240	7	630	≥80	>0.5	PA	30000	Ø95*57	Ø70-75	100 / 0.09 / 7.5
AL2018-10	220-240	10	900	≥80	>0.5	PA	30000	Ø110*58	Ø88-92	40 / 0.05 / 9.0
AL2018-15	220-240	15	1350	≥80	>0.5	PA	30000	Ø145*64	Ø115-120	40 / 0.07 / 10.3
AL2018-18	220-240	18	1620	≥80	>0.5	PA	30000	Ø175*67	Ø140-150	20 / 0.04 / 6.8
AL2018-24	220-240	24	2160	≥80	>0.5	PA	30000	Ø225*78	Ø190-200	20 / 0.04 / 6.8
SAA APPROVALS IC-4										
AL2018-5	220-240	5	450	≥80	>0.9	PA	30000	Ø95*57	Ø70-75	100 / 0.09 / 7.5
AL2018-7	220-240	7	630	≥80	>0.9	PA	30000	Ø95*57	Ø70-75	100 / 0.09 / 7.5
AL2018-9	220-240	9	800	≥80	>0.9	PA	30000	Ø110*58	Ø88-92	40 / 0.05 / 9.0
AL2018-12	220-240	12	1080	≥80	>0.9	PA	30000	Ø145*64	Ø115-120	40 / 0.07 / 10.3
AL2018-16	220-240	16	1440	≥80	>0.9	PA	30000	Ø175*67	Ø140-150	20 / 0.04 / 6.8
AL2018-22	220-240	22	1980	≥80	>0.9	PA	30000	Ø225*78	Ø190-200	20 / 0.04 / 6.8

Office Downlights



-  Built-in Tuya intelligent module
-  WIFI / Zigbee / Bluetooth Remote Control Opitonal
-  Have Dimmable, CCT adjustale function
-  Support multi-scene choices and timing function



Item No.	Type	Voltage	Wattage	Lumen	Ceiling Hole	Size(D*H)
Smart-AL2018-7	CCT/CCT+RGB	220-240V	7W	630lm	Ø70-75mm	Ø95*57mm
Smart-AL2018-10	CCT/CCT+RGB	220-240V	10W	900lm	Ø88-92mm	Ø110*58mm
Smart-AL2018-15	CCT/CCT+RGB	220-240V	15W	1350lm	Ø115-120mm	Ø145*64mm
Smart-AL2018-18	CCT/CCT+RGB	220-240V	18W	1620lm	Ø140-150mm	Ø175*67mm
Smart-AL2018-24	CCT/CCT+RGB	220-240V	24W	2160lm	Ø190-200mm	Ø225*78mm






Office Downlights



Color Temp.
adjustable



Dialup dimming

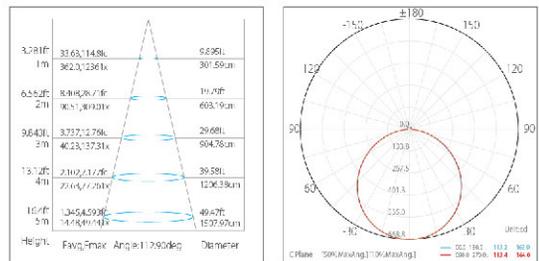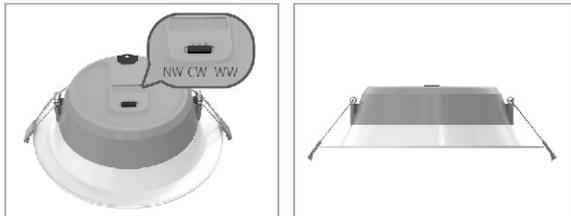

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [D*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL5010-9	220-240	9	720	≥80	>0.5	Alu.+PC	30000	Ø115*45	Ø100	40 / 0.0438 / 6.6
AL5010-15	220-240	15	1200	≥80	>0.5	Alu.+PC	30000	Ø165*45	Ø150	30 / 0.0635 / 8.5
AL5010-25	220-240	25	1600	≥80	>0.5	Alu.+PC	30000	Ø220*45	Ø200	20 / 0.0726 / 9.1
AL5010-30	220-240	30	1920	≥80	>0.5	Alu.+PC	30000	Ø220*45	Ø200	20 / 0.088 / 10.4

Office Downlights



Color Temp. adjustable



Dimmable



 **IC-4**

Color option



Blue

Orange

Green


Dialup dimming



3000K 4000K 6500K



 **SMD2835**  **120°**  **ECO**

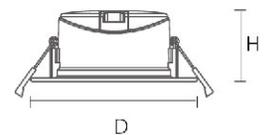

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL5005	220-240	9	800	≥80	>0.9	PBT+Alu.+PS	40000	Ø110*46	Ø 90	20 / 0.025 / 5.6

Office Downlights



-  Built-in Tuya intelligent module
-  WIFI / Zigbee / Bluetooth Remote Control Opitonal
-  Have Dimmable, CCT adjustale function
-  Support multi-scene choices and timing function

DIM

CCT

RGB

$Ra \geq 80$

$PF > 0.5$

Item No.	Type	Voltage	Wattage	Lumen	Size(D*H)
Smart-AL2021-12	CCT/CCT+RGB	220-240V	12W	1000lm	Ø185*60mm



Office Downlights




CE SAA APPROVAL IC-4 RoHS



Details



3000K 4000K 6500K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL2522-8	220-240	8	720	≥80	≥0.9	Alu.	30000	Ø106*25	Ø90-95	40 / 0.0438 / 6.6
AL2521/AL2522	220-240	15	1350	≥80	≥0.9	Alu.	30000	Ø140*49/Ø140*27	Ø125-135	30 / 0.0635 / 8.5
AL2521/AL2522	220-240	20	1800	≥80	≥0.9	Alu.	30000	Ø182*57/Ø180*29	Ø160-165	20 / 0.0726 / 9.1
AL2521/AL2522	220-240	28	2520	≥80	≥0.9	Alu.	30000	Ø230*53/Ø230*29	Ø200-210	20 / 0.088 / 10.4

Office Downlights



Details



3000K 4000K 6500K




SMD2835



60°



ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
AL3016-7	165-265	7	560	≥80	>0.5	Alu.+Glass	20000	Ø90*55	Ø65-80	80 / 0.114 / 17.5
AL3016-10	165-265	10	800	≥80	>0.5	Alu.+Glass	20000	Ø120*55	Ø95-110	40 / 0.0438 / 6.6
AL3016-15	165-265	15	1200	≥80	>0.5	Alu.+Glass	20000	Ø170*52	Ø140-155	30 / 0.0635 / 8.5
AL3016-30	165-265	30	2700	≥80	>0.5	Alu.+Glass	20000	Ø225*65	Ø195-210	20 / 0.0726 / 9.1
AL3016-60	165-265	60	5400	≥80	>0.5	Alu.+Glass	20000	Ø230*110	Ø195-210	20 / 0.088 / 10.4

Office Downlights



Details



3000K 4000K 6500K




SMD2835



90°



ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL3010-7	165-265	7	420	≥70	>0.5	Alu.	20000	Ø90*55	Ø65-80	80/0.114/17.5
AL3010-10	165-265	10	600	≥70	>0.5	Alu.	20000	Ø120*55	Ø95-110	60/0.132/18.2
AL3010-15	165-265	15	900	≥70	>0.5	Alu.	20000	Ø170*52	Ø140-155	40/0.096/16.8
AL3010-30	165-265	30	1800	≥70	>0.5	Alu.	20000	Ø225*65	Ø195-210	40/0.108/19.2


Office Downlights



Details



3000K 4000K 6500K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL2019/2020	220-240	10	900	≥80	>0.9	Alu.	30000	Ø110*53	Ø90-95	40 / 0.0438 / 6.6
AL2019/2020	220-240	15	1350	≥80	>0.9	Alu.	30000	Ø145*69	Ø125-130	30 / 0.0635 / 8.5
AL2019/2020	220-240	24	2160	≥80	>0.9	Alu.	30000	Ø190*86	Ø165-170	20 / 0.0726 / 9.1
AL2019/2020	220-240	30	2700	≥80	>0.9	Alu.	30000	Ø230*99	Ø200-210	20 / 0.088 / 10.4

Office Downlights


Cut-out size adjustable



Color Temp. adjustable







1.Surface mounted

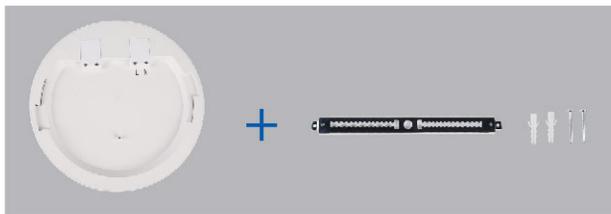

2.Embedded




Microwave Sensor

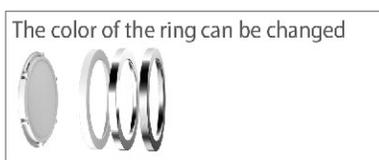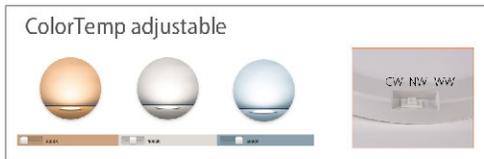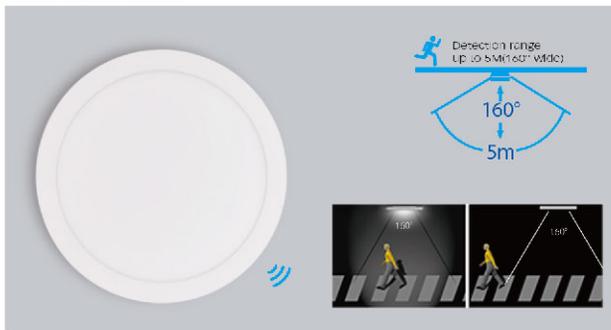


Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ³ / KG]
AL1030-6-CCT	220-240	6	480	80	>0.5	ABS+PA	30000	Ø150*22	Ø55-110	40 / 0.04 / 7
AL1030-12-CCT	220-240	12	960	≥80	>0.5	ABS+PA	30000	Ø175*22	Ø55-150	40 / 0.06 / 10.3
AL1030-18-CCT	220-240	18	1440	≥80	>0.5	ABS+PA	30000	Ø240*22	Ø55-130	20 / 0.04 / 6.8
AL1030S-18-CCT	220-240	18	1440	≥80	>0.5	ABS+PA	30000	Ø240*22	Ø55-210	20 / 0.04 / 6.8

Office Downlights

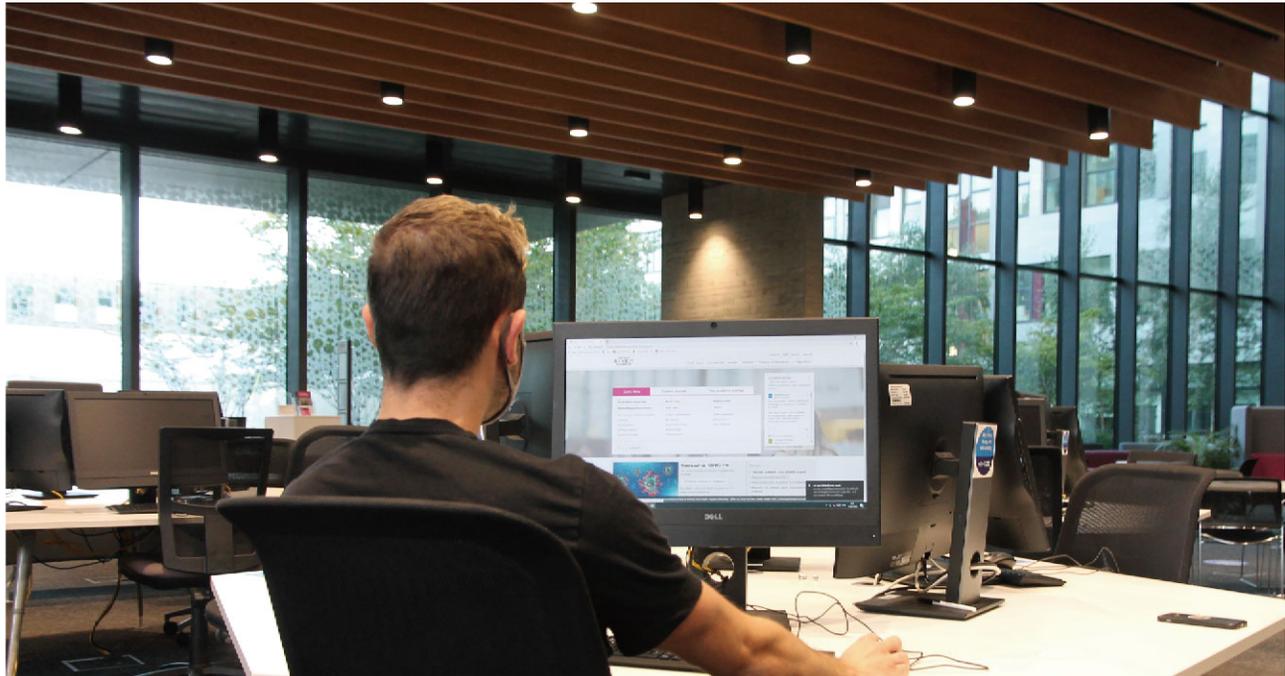

 **SMD2835**
 **120°**
 **ECO**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
AL2039-7	100-240	7	420	≥70	>0.5	Iron	10000	Ø108*75	40 / 0.039 / 15.6
AL2039-12	100-240	12	720	≥70	>0.5	Iron	10000	Ø138*75	40 / 0.059 / 23.6
AL2039-15	100-240	15	900	≥70	>0.5	Iron	10000	Ø160*75	40 / 0.059 / 23.8
AL2039-18	100-240	18	1080	≥70	>0.5	Iron	10000	Ø160*75	40 / 0.039 / 15.6

Office Downlights




AL2038



AL2021

 **SMD2835**
 **120°**
 **ECO**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
AL2038-12	100-240	12	720	≥70	>0.5	PVC	20000	Ø120*55	40 / 0.039 / 15.6
AL2038-18	100-240	18	1080	≥70	>0.5	PVC	20000	Ø180*55	40 / 0.059 / 23.6
AL2038-24	100-240	24	1440	≥70	>0.5	PVC	20000	Ø220*55	40 / 0.059 / 23.8
AL2021-12	100-240	12	720	≥70	>0.5	PVC	20000	120*120*55	40 / 0.039 / 15.6
AL2021-18	100-240	18	1080	≥70	>0.5	PVC	20000	180*180*55	40 / 0.059 / 23.6
AL2021-24	100-240	24	1440	≥70	>0.5	PVC	20000	220*220*55	40 / 0.059 / 23.6



Track Lights & Accessories


Track Lights



Multi - Angle Rotation



Optional color




Item No.	Voltage (V)	Wattage (W)	Lumen (lm)	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2025-8W-G2	165-265	8	560	Alu.	0.5	80	Ø50*138	60/0.09/12
TL2025-20W-G2	165-265	20	1400	Alu.	0.5	80	Ø60*158	30/0.07/12
TL2025-30W-G2	165-265	30	2100	Alu.	0.5	80	Ø73*178	50/0.12/15
TL2025-40W-G2	165-265	40	2800	Alu.	0.5	80	Ø82*178	20/0.06/12

Track Lights




Optional color



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2120-10	100-240V	10	750	Alu.	0.5	80	Ø54*120	50/0.03/10
TL2120-20	100-240V	20	1500	Alu.	0.5	80	Ø64*140	30/0.03/10
TL2120-30	100-240V	30	2250	Alu.	0.5	80	Ø76*150	20/0.03/10


Track Lights

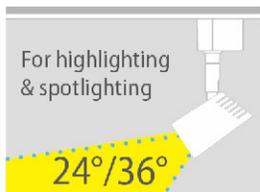

Optional color



				
COB	20 000	355°	90°	ECO




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2016-10	100-240	10	750	Alu.	0.5	80	Ø54*135	50/0.03/10
TL2016-20	100-240	20	1500	Alu.	0.5	80	Ø68*160	30/0.03/10
TL2016-30	100-240	30	2250	Alu.	0.5	80	Ø78*180	20/0.03/10

Track Lights



Optional color




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2014-10	100-240	10	2200	Alu.	0.5	80	∅75*120	50/0.03/10
TL2014-20	100-240	20	3300	Alu.	0.5	80	∅95*140	30/0.03/10
TL2014-30	100-240	30	4400	Alu.	0.5	80	∅95*150	20/0.03/10

Track Lights




Optional color



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2032-15	220-240	15	1125	Alu.	0.5	80	Ø75*165	50/0.03/10
TL2032-24	220-240	24	1800	Alu.	0.5	80	Ø95*180	30/0.03/10


Track Lights

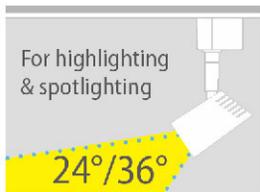

Optional color



 COB	 20 000	 355°	 90°	 ECO
--	---	---	--	--



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m³/KG]
TL2041-7	220-240	7	525	Alu.	0.5	80	Ø60*155	50/0.03/10
TL2041-12	220-240	12	900	Alu.	0.5	80	Ø90*170	30/0.03/10


Track Lights



Optional color




				
COB	20 000	355°	90°	ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2305-10	220-240	10	750	Alu.	0.5	80	Ø54*89	50/0.03/10
TL2305-20	220-240	20	1500	Alu.	0.5	80	Ø64*110	30/0.03/10
TL2305-30	220-240	30	2250	Alu.	0.5	80	Ø76*130	20/0.03/10
TL2305-40	220-240	40	3000	Alu.	0.5	80	Ø86*158	20/0.05/10


Track Lights

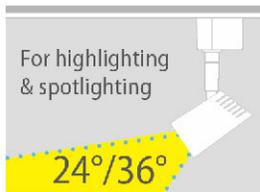

Optional color




				
COB	20 000	355°	90°	ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2017-10	100-240	10	750	Alu.	0.5	80	Ø75*120	50/0.03/10
TL2017-20	100-240	20	1500	Alu.	0.5	80	Ø95*140	30/0.03/10
TL2017-30	100-240	30	2250	Alu.	0.5	80	Ø105*150	20/0.03/10


Track Lights

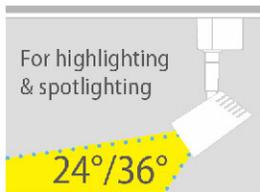

Optional color



 **COB**
 **30 000**
 **355°**
 **90°**
 **ECO**




Item No.	Voltage (V)	Wattage (W)	Lumen (lm)	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2018-10	220-240	10	900	Alu.	0.5	80	Ø60*135	50/0.03/10
TL2018-20	220-240	20	1800	Alu.	0.9	80	Ø70*138	30/0.03/10
TL2018-30	220-240	30	2700	Alu.	0.9	80	Ø80*143	20/0.03/10
TL2018-40	220-240	40	3600	Alu.	0.9	80	Ø90*150	20/0.05/10

Track Lights



Optional color



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2019-10	220-240	10	900	Alu.	0.5	80	Ø68*105	50/0.070/10.0
TL2019-20	220-240	20	1800	Alu.	0.5	80	Ø80*125	40/0.070/10.0
TL2019-30	220-240	30	2700	Alu.	0.9	80	Ø90*130	30/0.080/11.0


Track Lights




Color Temp.
adjustable



Dimming

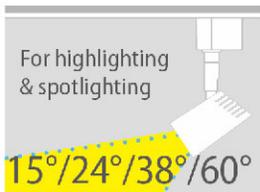

Optional color




Item No.	Voltage (V)	Wattage (W)	Lumen (lm)	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2055-10	220-240	10	800	Alu.	0.5	80	Ø60*167	50/0.03/10
TL2055-20	220-240	20	1600	Alu.	0.9	80	Ø70*170	30/0.03/10
TL2055-30	220-240	30	2400	Alu.	0.9	80	Ø80*177	20/0.03/10
TL2055-40	220-240	40	3200	Alu.	0.9	80	Ø90*182	20/0.05/10

Track Lights




Optional color



Item No.	Voltage (V)	Wattage (W)	Lumen (lm)	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2027-10	220-240	10	900	Alu.	0.5	80	Ø60*135	50/0.03/10
TL2027-20	220-240	20	1800	Alu.	0.9	80	Ø70*138	30/0.03/10
TL2027-30	220-240	30	2700	Alu.	0.9	80	Ø80*143	20/0.03/10
TL2027-40	220-240	40	3600	Alu.	0.9	80	Ø90*150	20/0.05/10


Track Lights

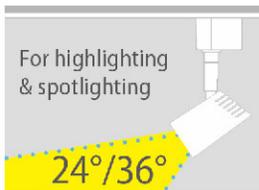

Optional color



				
COB	30 000	355°	90°	ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2046-30	100-240	30	2700	Alu.	0.9	80	Ø90*110	20/0.03/10
TL2046-35	100-240	35	3150	Alu.	0.9	0.9	Ø90*110	20/0.03/10

Track Lights



Adjustment Focal Length




Zoomable track light



Dial code



Optional color



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2066-20	220-240	20	1600	Alu.	0.9	90	Ø67*H156	50/0.03/10
TL2066-30	220-240	30	2400	Alu.	0.9	90	Ø80*H181	30/0.03/10
TL2066-40	220-240	40	3200	Alu.	0.9	90	Ø95*H191	20/0.03/10

Track Lights



Foldable




Optional color



 COB	 30 000	 355°	 90°	 ECO
---	--	--	---	---

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2067-50	220-240	50	5000	Alu.	0.9	90	582*138*108	10/0.03/10


Track Lights

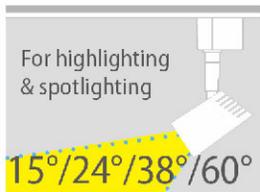

Optional color



				
COB	30 000	355°	90°	ECO




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL534-20	100-240	20	1800	Alu.	0.9	80	Ø100*155	50/0.03/10
TL534-30	100-240	30	2700	Alu.	0.9	80	Ø100*155	30/0.03/10
TL534-35	100-240	35	3150	Alu.	0.9	80	Ø100*155	20/0.03/10
TL534-40	100-240	40	3600	Alu.	0.9	80	Ø100*170	20/0.05/10

Track Lights



100 LM/W

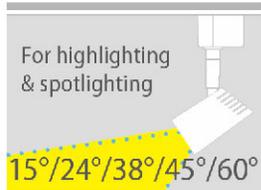


Replacement drive



Reflector replace



Optional color



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2224-20	200-240	20	2000	Alu.	0.9	90	Ø75*240	30/0.03/10
TL2224-30	200-240	30	3000	Alu.	0.9	90	Ø90*245	20/0.03/10
TL2224-40	200-240	40	4000	Alu.	0.9	90	Ø100*253	20/0.05/10


Track Lights



Adjustment Focal Length



Optional color



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2391-10	100-240	10	800	Alu.	0.5	80	∅60*150	50/0.03/10
TL2391-20	100-240	20	1600	Alu.	0.5	80	∅70*160	30/0.03/10
TL2391-30	100-240	30	2400	Alu.	0.5	80	∅80*170	20/0.03/10

Track Lights




Adjustment Focal Length



Knob focusing



Optional color



Item No.	Voltage (V)	Wattage (W)	Lumen (lm)	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2396-10	100-240	10	800	Alu.	0.5	80	Ø65*145	50/0.03/10
TL2396-20	100-240	20	1600	Alu.	0.5	80	Ø75*165	30/0.03/10
TL2396-30	100-240	30	2400	Alu.	0.5	80	Ø95*175	20/0.03/10
TL2396-40	100-240	40	3200	Alu.	0.5	80	Ø105*175	20/0.05/10

Track Lights



Optical Lens




Zoomable track light




Optional color



 **COB**
 **30 000**
 **355°**
 **90°**
 **ECO**




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	PF	RA	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TL2397-10	220-240	10	800	Alu.	0.9	80	∅60*140	50/0.03/10
TL2397-20	220-240	20	1600	Alu.	0.9	80	∅70*150	30/0.03/10
TL2397-30	220-240	30	2400	Alu.	0.9	80	∅80*165	20/0.03/10

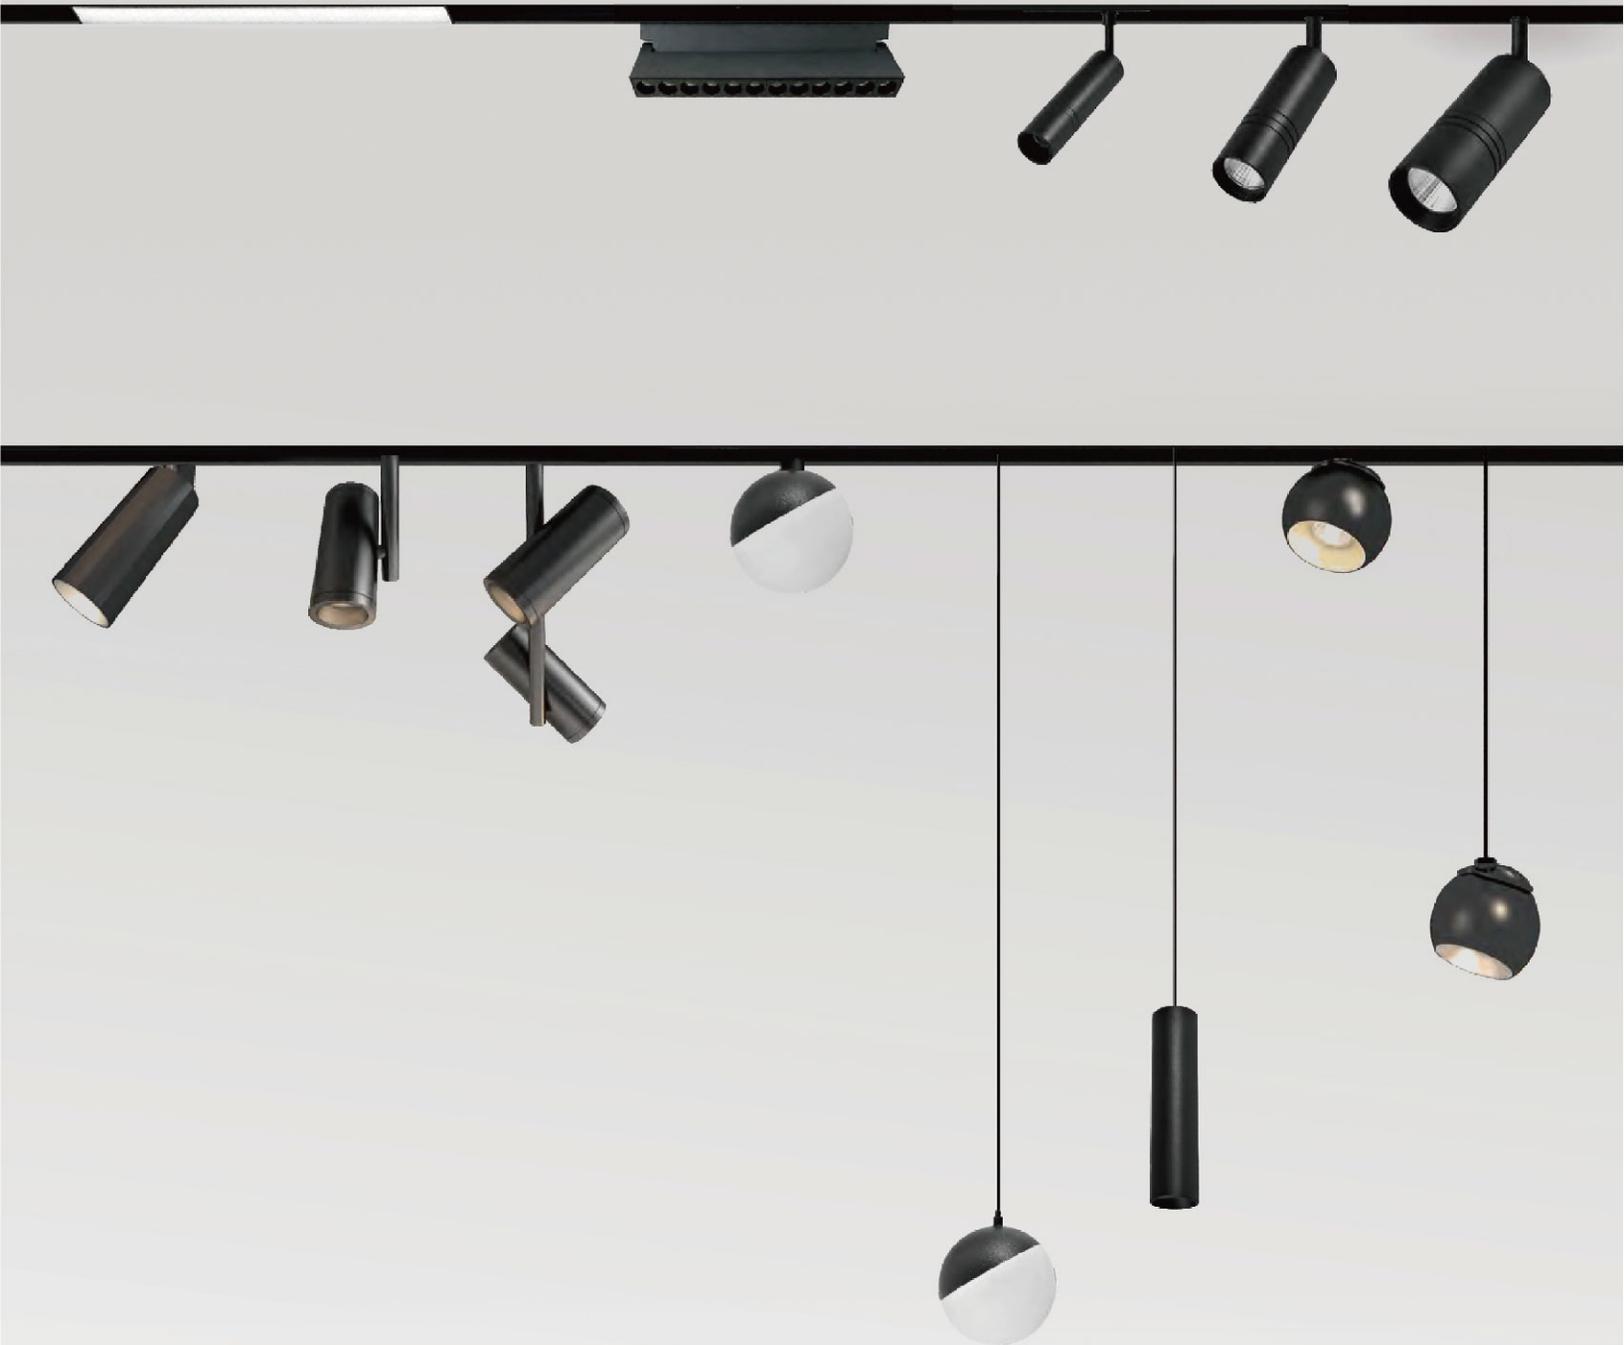

Track Lights - TL3002 Series


Track Lights

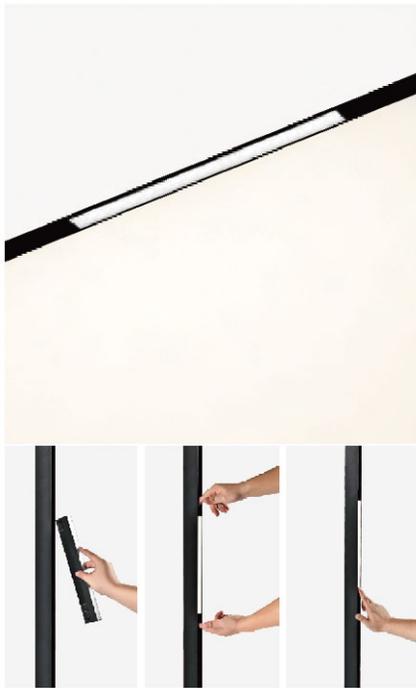

Optional color



120°

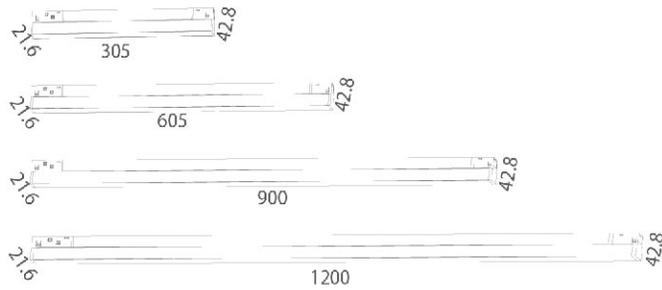


Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-DFS-300	10W	3/4/5000K	Ra90	48V	700lm	305*21.6*42.8
TL3002-M20-DFS-600	20W	3/4/5000K	Ra90	48V	1400lm	605*21.6x42.8
TL3002-M20-DFS-900	30W	3/4/5000K	Ra90	48V	2100lm	900*21.6*42.8
TL3002-M20-DFS-1500	40W	3/4/5000K	Ra90	48V	2800lm	1200*21.6*42.8



Optional color



120°


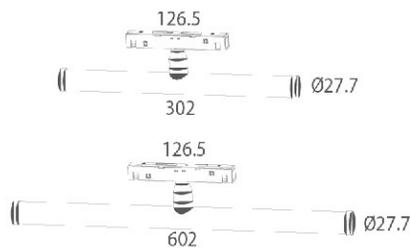


Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-TB-300	6W	3/4/5000K	Ra90	48V	600lm	302*Ø27.7
TL3002-M20-TB-600	12W	3/4/5000K	Ra90	48V	1200lm	602*Ø27.7

Track Lights





Optional color

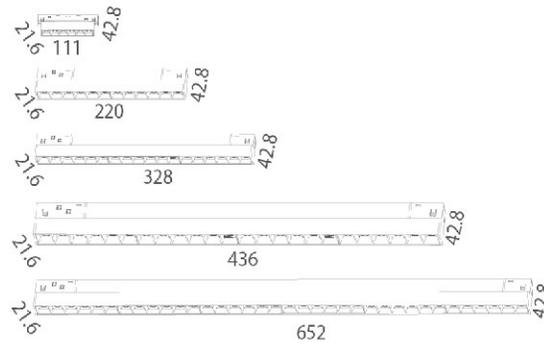

Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-LB-6W	6W	3/4/5000K	Ra90	48V	480lm	111*21.6*42.8
TL3002-M20-LB-12W	12W	3/4/5000K	Ra90	48V	960lm	220*21.6*42.8
TL3002-M20-LB-18W	18W	3/4/5000K	Ra90	48V	1440lm	328*21.6*42.8
TL3002-M20-LB-24W	24W	3/4/5000K	Ra90	48V	1920lm	436*21.6*42.8
TL3002-M20-LB-36W	36W	3/4/5000K	Ra90	48V	2880lm	652*21.6*42.8




Optional color

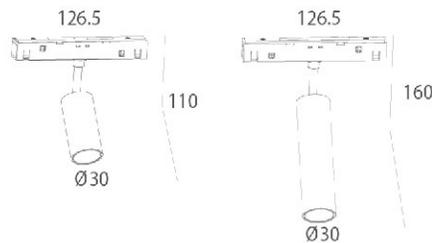



Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-TL2-3W	3W	3/4/5000K	Ra90	48V	220lm	Ø30*110*126.5
TL3002-M20-TL2-5W	5W	3/4/5000K	Ra90	48V	280lm	Ø30*160*126.5


Track Lights

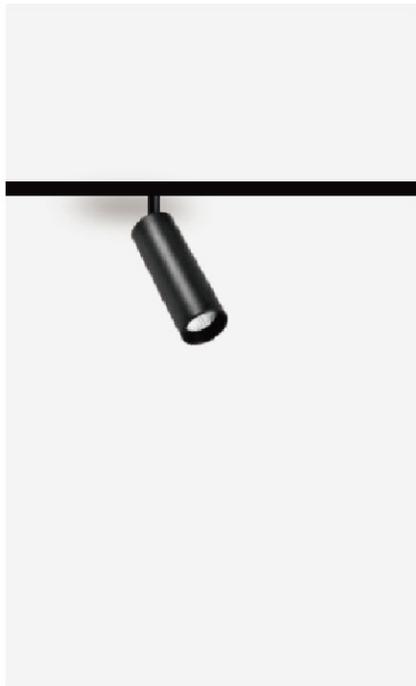



Optional color

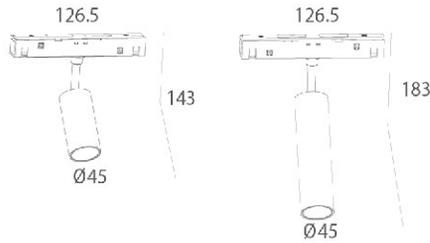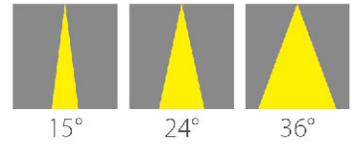

Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-TL2-7W	7W	3/4/5000K	Ra90	48V	560lm	Ø45x143x126.5
TL3002-M20-TL2-12W	12W	3/4/5000K	Ra90	48V	960lm	Ø45x183x126.5

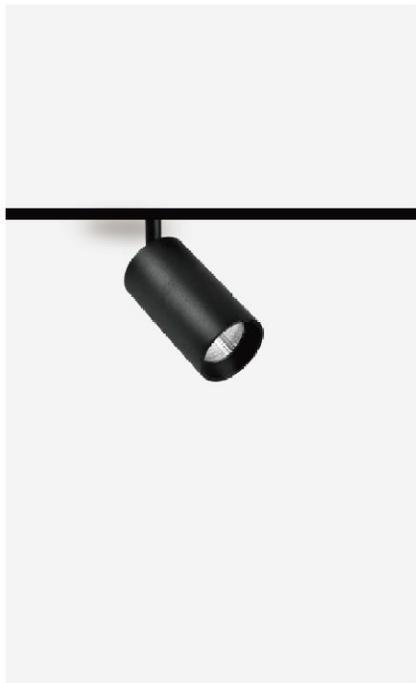


Optional color

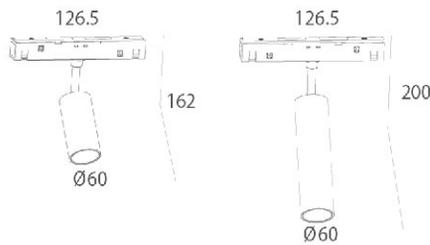
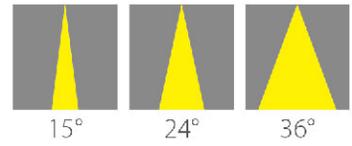


Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-TL2-15W	15W	3/4/5000K	Ra90	48V	1200lm	Ø60*162*126.5
TL3002-M20-TL2-20W	20W	3/4/5000K	Ra90	48V	1600lm	Ø60*200*126.5

Track Lights

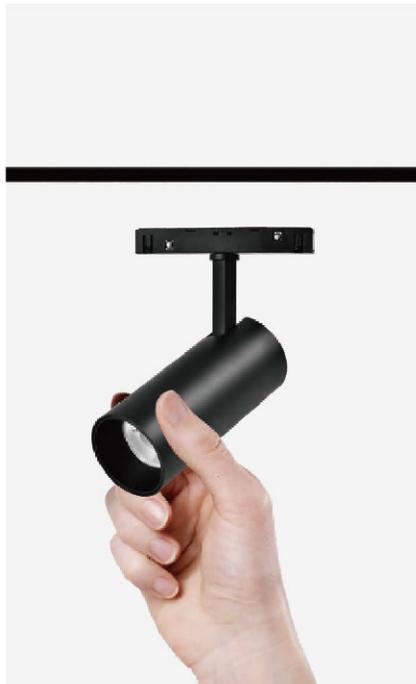


Optional color

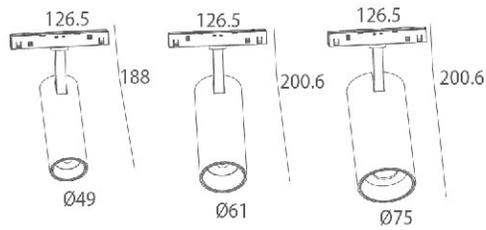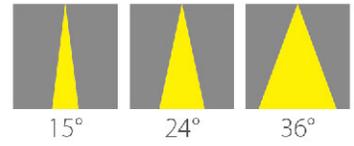

Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-TL-12W	12W	3/4/5000K	Ra90	48V	960lm	Ø49x188x126.5
TL3002-M20-TL-20W	20W	3/4/5000K	Ra90	48V	1600lm	Ø61x200.6x126.5
TL3002-M20-TL-30W	30W	3/4/5000K	Ra90	48V	2400lm	Ø75x200.6x126.5



Optional color

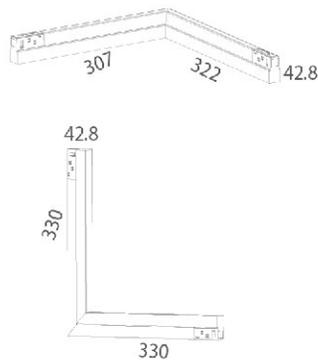

Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-DFS-90°1	20W	3/4/5000K	Ra90	48V	1400lm	307*322*42.8
TL3002-M20-DFS-90°2	20W	3/4/5000K	Ra90	48V	1400lm	330*330*42.8



Track Lights



Optional color



120°

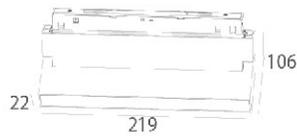

Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-DFSF2-6W	6W	3/4/5000K	Ra90	48V	420lm	111*22*106
TL3002-M20-DFSF2-12W	12W	3/4/5000K	Ra90	48V	840lm	219*22*106





Optional color



24°

36°

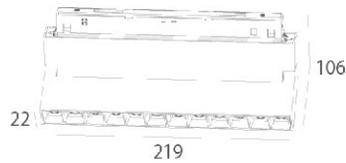



Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-LBF2-6W	6W	3/4/5000K	Ra90	48V	1200lm	Ø60*162*126.5
TL3002-M20-LBF2-12W	12W	3/4/5000K	Ra90	48V	1600lm	Ø60*200*126.5


Track Lights




Optional color

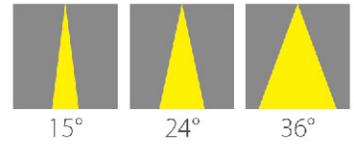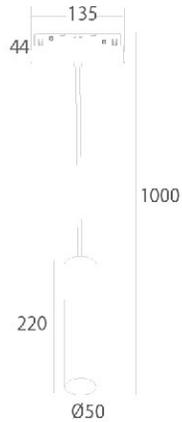

Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-FM-9W	9W	3/4/5000K	Ra90	48V	720lm	Ø50*1000*135

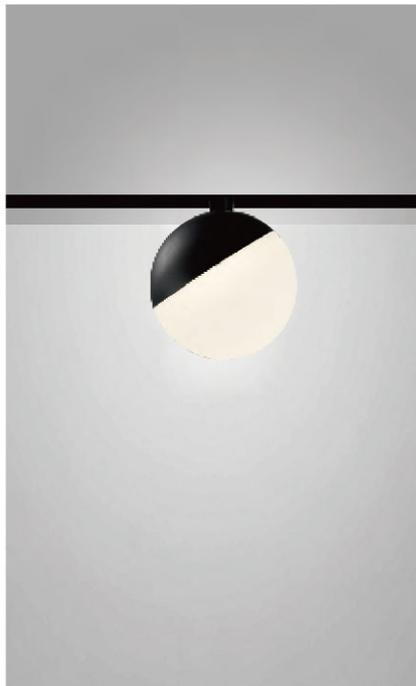

Optional color


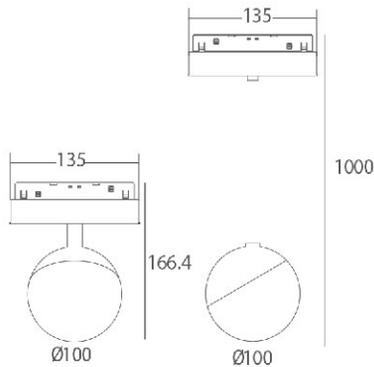


Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-BL	10W	3/4/5000K	Ra90	48V	800lm	Ø100*166.4*135
TL3002-M20-BL	10W	3/4/5000K	Ra90	48V	800lm	Ø100*1000*135


Track Lights





Optional color

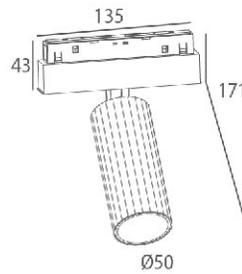

Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-HD-12W	12W	3/4/5000K	Ra90	48V	860lm	Ø50*171*135

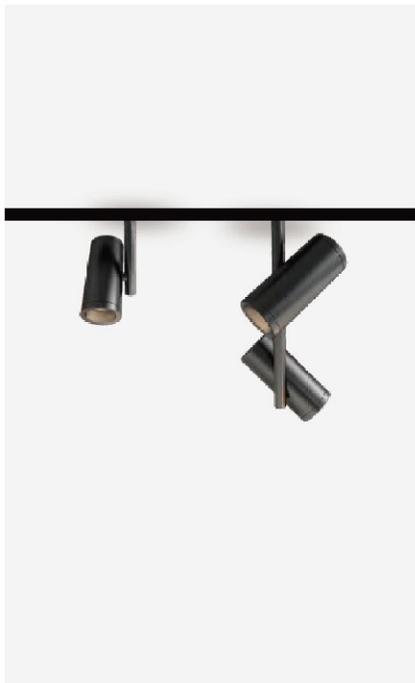

Optional color

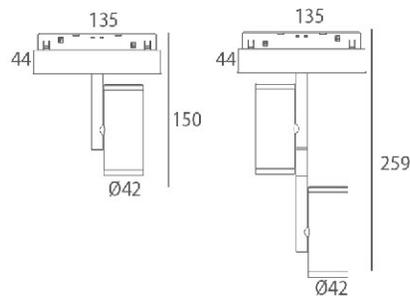
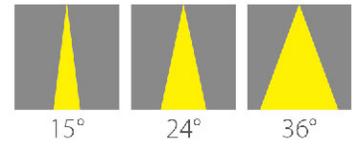


Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-PST-10W	10W	3/4/5000K	Ra90	48V	640lm	Ø42*150*135
TL3002-M20-PST-10WX2	10W*2	3/4/5000K	Ra90	48V	1440lm	Ø42*259*135

Track Lights





Optional color

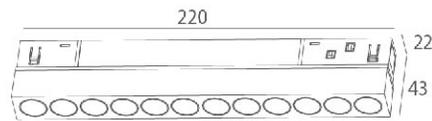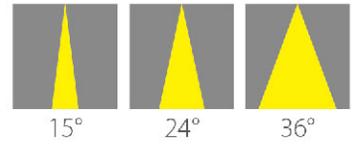

Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-LB2-12W	12W	3/4/5000K	Ra90	48V	960lm	220*22*43



Optional color

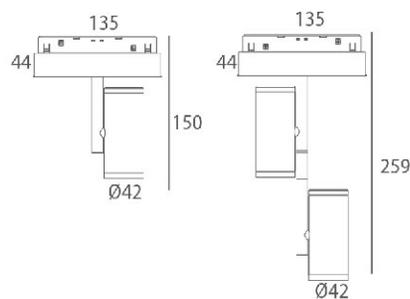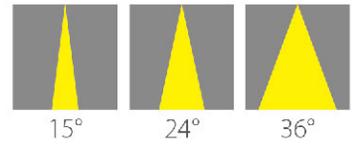


Product Code	Watt	CCT	>CRI	Voltage	Lumen	Product Size
TL3002-M20-PST-10W	10W	3/4/5000K	Ra90	48V	640lm	Ø42*150*135
TL3002-M20-PST-10WX2	10W*2	3/4/5000K	Ra90	48V	1440lm	Ø42*259*135

Track Lights


Track Rail



S20
Size: 26.4*78.4*26.4mm

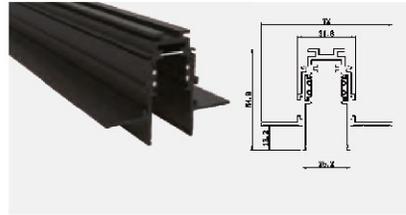

R20-2
Size: 72*54.9*26.3mm

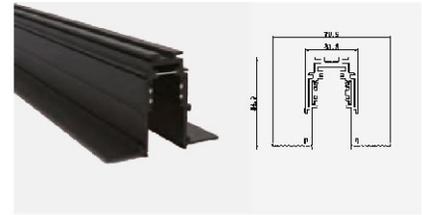

R20-5
Size: 70.9*54.9*31.8mm

Connection Module



Corner Connector



Straight Connector



3rd adaptor for track light



Straight Connector




Live end

Track Lights & Accessories



Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2415	GU10	Iron	20000	Ø58*135	80/0.080/14.5




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2411	GU10	Iron	20000	Ø58*135	50/0.090/12.3




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2101	GU10	Alu.	20000	Ø55*100	50/0.070/7.5




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2102	GU10	Alu.	20000	Ø60*100	100/0.071/12.0



Optional color




Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2103	GU10	Alu.	20000	Ø60*100	100/0.071/12.0

Track Lights & Accessories




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2107	GU10	Alu.	20000	Ø60*100	100/0.071/12.0




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2110	GU10	Alu.	20000	Ø60*150	50/0.090/12.3




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2112	GU10	Alu.	20000	Ø80*84	50/0.070/7.5




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2113	GU10	Alu.	20000	Ø60*100	100/0.071/12.0



Optional color




Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2114	GU10	Alu.	20000	Ø60*100	100/0.071/12.0

Track Lights & Accessories




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2115	GU10	Alu.	20000	Ø55*100	100/0.071/12.0




Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2033	GX53	Alu.	20000	Ø85*150	50/0.090/12.3



Optional color



Item No.	Adaptation	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TL2033A	GX53	Alu.	20000	Ø85*90	50/0.070/7.5

Track Lights & Accessories

Four Wires Track bar



Item No.	Type	Size [mm]	Material
TL2137-1	4 wires type	1000*42*33.5	Alu.
TL2137-2	4 wires type	2000*42*33.5	Alu.
TL2137-3	4 wires type	3000*42*33.5	Alu.
TL2038-1	4 wires type	1000*42*33.5	Alu.
TL2038-2	4 wires type	2000*42*33.5	Alu.
TL2038-3	4 wires type	3000*42*33.5	Alu.

Three Wires Track bar



Two Wires Track bar



Item No.	Type	Size [mm]	Material
TL2036-1	3 wires type	1000*35*18	Alu.
TL2036-2	3 wires type	2000*35*18	Alu.
TL2036-3	3 wires type	3000*35*18	Alu.
TL2035-1	2 wires type	1000*35*20	Alu.
TL2035-2	2 wires type	2000*35*20	Alu.
TL2035-3	2 wires type	3000*35*20	Alu.

Two / Three / Four Wires joint





Item No.	Type	Size [mm]	Material
TL2137-A	4 wires type	160*42*30	ABS
TL2137-B	4 wires type	100*100*30	ABS
TL2137-C	4 wires type	160*100*30	ABS
TL2137-D	4 wires type	160*160*30	ABS
TL2038-A	4 wires type	160*42*30	ABS
TL2038-B	4 wires type	100*100*30	ABS
TL2038-C	4 wires type	160*100*30	ABS
TL2038-D	4 wires type	160*160*30	ABS
TL2036-A	3 wires type	160*42*30	ABS
TL2036-B	3 wires type	100*100*30	ABS
TL2036-C	3 wires type	160*100*30	ABS
TL2036-D	3 wires type	160*160*30	ABS
TL2035-A	2 wires type	160*42*30	ABS
TL2035-B	2 wires type	100*100*30	ABS
TL2035-C	2 wires type	160*100*30	ABS
TL2035-D	2 wires type	160*160*30	ABS




Commercial Spotlights

Commercial Spotlights

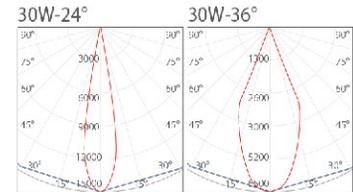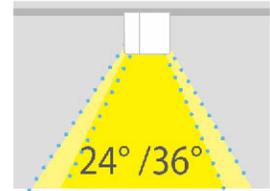

100-265V
COB
20 000
>0.5
≥80
24/36°
ECO



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
AL2052-10	100-265	10	700	Alu.	20000	∅105*108	12/0.087/8.5
AL2052-15	100-265	15	1050	Alu.	20000	∅105*108	12/0.087/8.5
AL2054-10	100-265	10	700	Alu.	20000	∅105*98	12/0.087/8.5
AL2054-15	100-265	15	1050	Alu.	20000	∅105*98	12/0.087/8.5




Optional color



For highlighting & spotlighting




100-265V
COB
20 000
>0.5
≥80
355°
90°
ECO




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Angle	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
TSL401-10	100-265	10	750	24°/38°/45°/60°	Alu.	20000	∅90*75	50/0.048/12.5
TSL401-15	100-265	15	1125	24°/38°/45°/60°	Alu.	20000	∅110*95	50/0.067/13.5
TSL401-20	100-265	20	1500	24°/38°/45°/60°	Alu.	20000	∅135*110	18/0.049/11.5
TSL401-30	100-265	30	2250	24°/38°/45°/60°	Alu.	20000	∅166*120	20/0.085/14.0

Commercial Spotlights

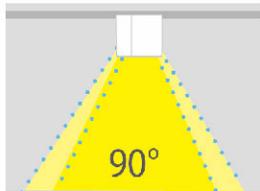



 **100-265V**
 **COB**
 **20 000**
 **>0.5**
 **≥80**
 **90°**
 **ECO**





Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
AL2037-10	100-265	10	1000	Alu.	20000	Ø95*50	40/0.023/9.0
AL2052-15	100-265	15	1500	Alu.	20000	Ø115*70	20/0.022/7.0
AL2052-20	100-265	20	2000	Alu.	20000	Ø140*90	20/0.040/9.0
AL2052-30	100-265	30	3000	Alu.	20000	Ø165*100	20/0.060/10.0
AL2052-40	100-265	40	4000	Alu.	20000	Ø195*110	20/0.095/11.0
AL2052-50	100-265	50	5000	Alu.	20000	Ø230*120	10/0.070/12.0
AL2052-60	100-265	60	6000	Alu.	20000	Ø230*120	10/0.070/12.0

Commercial Spotlights

UGR < 19

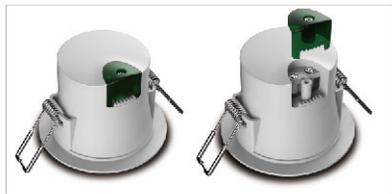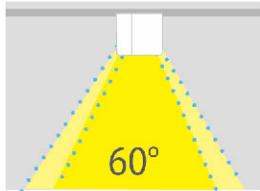

Details

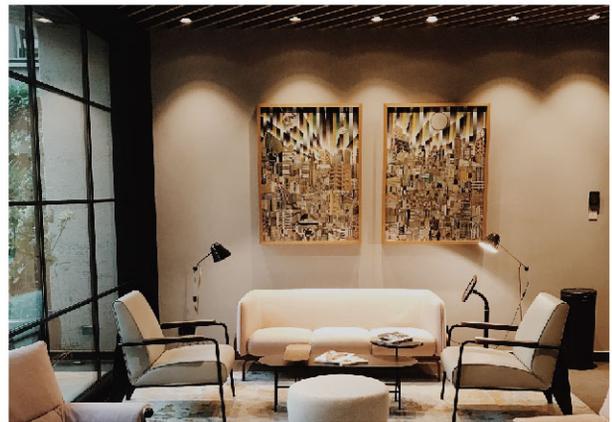


Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs/m ² /KG]
AL2515-6W	220-240	6	540	PA+Alu.	30000	Ø85*80	Ø70-75	40/0.030/10.0
AL2515-9W	220-240	9	810	PA+Alu.	30000	Ø105*80	Ø88-92	40/0.040/12.0


Commercial Spotlights



IP54


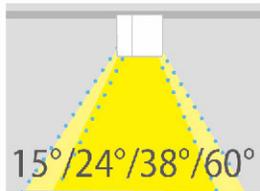


3000K 4000K 6500K



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
AL2518	220-240	10	900	≥80	>0.9	Alu.	30000	Ø100*64/100*100*64	Ø90-95	40 / 0.0438 / 6.6
AL2518	220-240	15	1350	≥80	>0.9	Alu.	30000	Ø136*83/136*136*83	Ø125-130	30 / 0.0635 / 8.5
AL2518	220-240	24	2160	≥80	>0.9	Alu.	30000	Ø158*96/158*158*96	Ø165-170	20 / 0.0726 / 9.1
AL2518	220-240	30	2700	≥80	>0.9	Alu.	30000	Ø180*109/180*180*109	Ø200-210	20 / 0.088 / 10.4


Commercial Spotlights

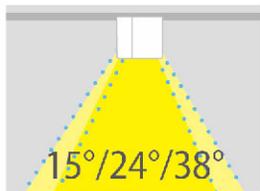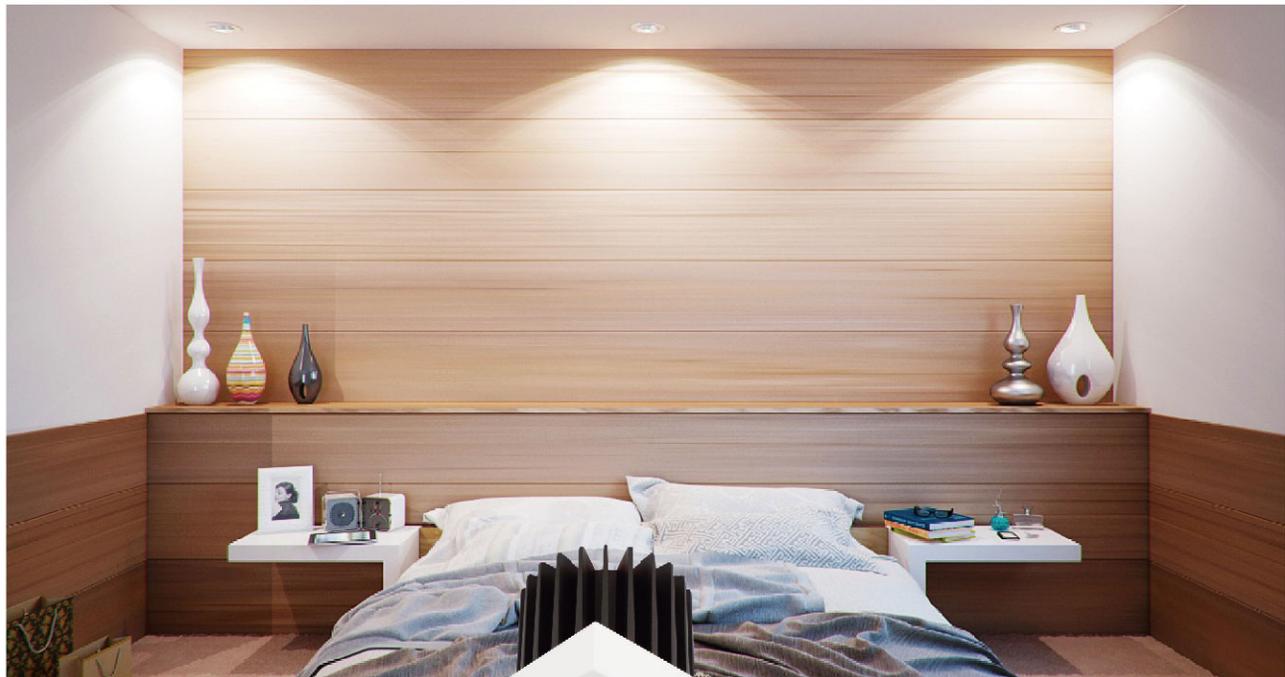

Details




3000K 4000K 6500K




Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Material	Lifetime [H]	Size [L*W*Hmm]	Ceiling Hole [mm]	Packing [Pcs / M ² / KG]
TS1220Y	220-240	28	2520	>80	>0.9	Alu.	30000	Ø160*126	Ø150	20 / 0.063 / 8.5
TS1220F	220-240	28	2520	>80	>0.9	Alu.	30000	175*175*141	Ø160	20 / 0.072 / 9.1
TS1220F2	220-240	2*28	2*2520	>80	>0.9	Alu.	30000	330*175*141	160*315	10 / 0.088 / 10.4


Commercial Spotlights

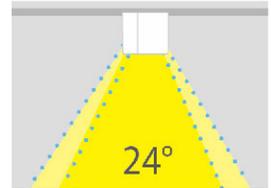


 **165-265V**
 **COB**
 **20 000**
 **>0.5**
 **≥80**
 **24°**
 **ECO**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TS8041-5	165-265	5	400	Alu.	20000	Ø63*70	80/0.071/10
TS8041-10	165-265	10	800	Alu.	20000	Ø85*85	60/0.069/10
TS8041-20	165-265	20	1600	Alu.	20000	Ø110*87	40/0.071/9

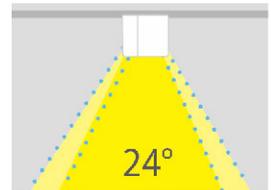

 **165-265V**
 **COB**
 **20 000**
 **>0.5**
 **≥80**
 **24°**
 **ECO**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Material	Lifetime [H]	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
TS8041-5	165-265	5	400	Alu.	20000	Ø49*H69.5	80/0.071/10
TS8041-10	165-265	10	800	Alu.	20000	Ø69*H85	60/0.069/10
TS8041-20	165-265	20	1600	Alu.	20000	Ø89*H86.5	40/0.071/9

Commercial Spotlights



TS8041-5W-Y

Warranty	2-year
Size	Ø63*19mm
Material	Alu.



TS8041-10W-Y

Warranty	2-year
Size	Ø85*25mm
Material	Alu.



TS8041-20W-Y

Warranty	2-year
Size	Ø110*30mm
Material	Alu.



TS8041-5W-YW

Warranty	2-year
Size	Ø81*19mm
Material	Alu.



TS8041-10W-YW

Warranty	2-year
Size	Ø101*27mm
Material	Alu.



TS8041-20W-YW

Warranty	2-year
Size	Ø130*30mm
Material	Alu.



TS8041-10W-F1M

Warranty	2-year
Size	108*108*110mm
Material	Alu.



TS8041-10W-F2M

Warranty	2-year
Size	202*108*110mm
Material	Alu.



TS8041-10W-F3M

Warranty	2-year
Size	298*108*110mm
Material	Alu.

Commercial Spotlights



TS8041-10W-F4M

Warranty	2-year
Size	202*202*110mm
Material	Alu.



TS8041-10W-F1

Warranty	2-year
Size	88*88*27mm
Material	Alu.



TS8041-10W-F2

Warranty	2-year
Size	168*88*27mm
Material	Alu.



TS8041-10W-F3

Warranty	2-year
Size	247*88*27mm
Material	Alu.



TS8041-10W-F4

Warranty	2-year
Size	168*168*27mm
Material	Alu.



TS8041-20W-F1

Warranty	2-year
Size	115*115*30mm
Material	Alu.



TS8041-20W-F2

Warranty	2-year
Size	216*115*30mm
Material	Alu.



TS8041-20W-F3

Warranty	2-year
Size	317*115*30mm
Material	Alu.




TS8041-20W-F4


Warranty	2-year
Size	216*216*30mm
Material	Alu.

Commercial Spotlights **NEW**


01 Front installation:

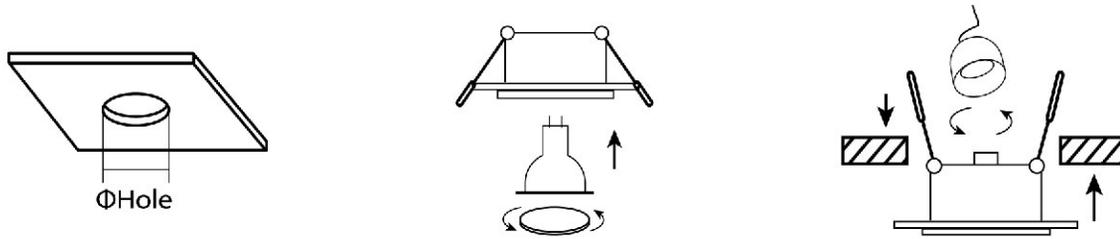

02 Concealed installation:

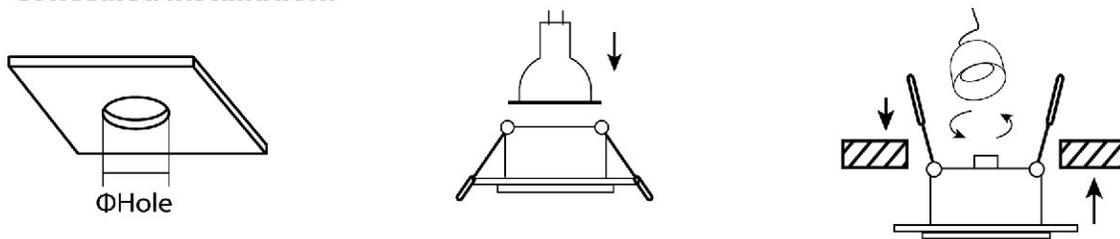

03 Surface installation:

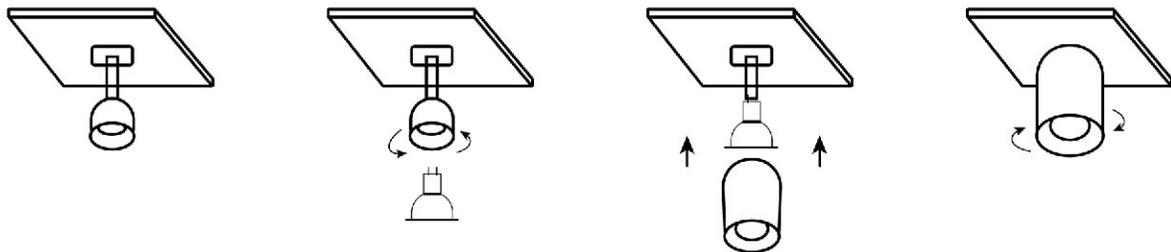

FOR LED LIGHT ONLY!    



Commercial Spotlights **NEW**



Adjustable Concealed

AL4003

Ceiling Hole	D75mm
Size	D90*29mm
Material	PC



Adjustable Concealed

AL4008

Ceiling Hole	D75mm
Size	D90*29mm
Material	PC



Adjustable Concealed

AL4013

Ceiling Hole	D75mm
Size	D90*29mm
Material	PC



Adjustable Concealed

AL4005

Ceiling Hole	D75-85mm
Size	93*93*29mm
Material	PC



Adjustable Concealed

AL4006

Ceiling Hole	80*160mm
Size	173*93*29mm
Material	PC



Adjustable Concealed

AL4007

Ceiling Hole	80*240mm
Size	252*93*29mm
Material	PC



Adjustable Front

AL4018

Ceiling Hole	D70mm
Size	D90*25mm
Material	PC



Concealed

AL4019

Ceiling Hole	D85mm
Size	93*93*53mm
Material	PC



Concealed

AL4022

Ceiling Hole	D85mm
Size	D93*53mm
Material	PC

Commercial Spotlights **NEW**



Adjustable Concealed

AL4024

Ceiling Hole surface installation

Size 96*96*100mm

Material PC



Adjustable Concealed

AL4050

Ceiling Hole surface installation

Size 186*98*100mm

Material PC



Adjustable Concealed

AL4027

Ceiling Hole surface installation

Size D96*100mm

Material PC



Adjustable Concealed

AL4053

Ceiling Hole surface installation

Size 186*98*100mm

Material PC



Concealed

AL4201

Ceiling Hole surface installation

Size D55*100mm

Material Alu.



Concealed

AL4202

Ceiling Hole surface installation

Size D70*100mm

Material Alu.



Concealed

AL4203

Ceiling Hole surface installation

Size D55*100mm

Material Alu.



Concealed

AL4205

Ceiling Hole surface installation

Size D70*100mm

Material Alu.



Adjustable Front

AL4206

Ceiling Hole surface installation

Size D96*125mm

Material Alu.

Commercial Spotlights **NEW**



Adjustable Front

AL4207

Ceiling Hole	surface installation
Size	180*96*125mm
Material	Alu.



Adjustable Front

AL4208

Ceiling Hole	surface installation
Size	180*180*125mm
Material	Alu.



Adjustable Front

AL4209

Ceiling Hole	surface installation
Size	96*96*125mm
Material	Alu.



Adjustable Front

AL4210

Ceiling Hole	surface installation
Size	185*96*125mm
Material	Alu.



Front

AL4215

Ceiling Hole	surface installation
Size	D65*88mm
Material	Alu.



Adjustable Front

AL4229

Ceiling Hole	surface installation
Size	D80*100mm
Material	Alu.



Front

AL4232

Ceiling Hole	surface installation
Size	D55*100mm
Material	Alu.



Front

AL4233

Ceiling Hole	surface installation
Size	D55*130mm
Material	Alu.



Front

AL4234

Ceiling Hole	surface installation
Size	80*80*130mm
Material	Alu.

Commercial Spotlights **NEW**



Front

AL4235

Ceiling Hole	surface installation
Size	D55*100mm
Material	Alu.



Adjustable

Front

AL4240

Ceiling Hole	surface installation
Size	D60*100mm
Material	Alu.



Front

AL4242

Ceiling Hole	surface installation
Size	86*86*140mm
Material	Alu.



Front

AL4237

Ceiling Hole	surface installation
Size	D68*115mm
Material	Alu.



Front

AL4238

Ceiling Hole	surface installation
Size	D68*115mm
Material	Alu.



Front

AL4239

Ceiling Hole	surface installation
Size	D68*115mm
Material	Alu.



Front

AL4246

Ceiling Hole	surface installation
Size	D80*100mm
Material	Alu.



Front

AL4247

Ceiling Hole	surface installation
Size	160*80*100mm
Material	Alu.



Front

AL4248

Ceiling Hole	surface installation
Size	320*80*100mm
Material	Alu.