

LED Lighting Catalogue

Security & Electrical Products 2022





Smart Control & Sensors

- WIFI Control & Sensors
- Zigbee Control & Sensors

WiFi Control & Sensors



- Communication protocol: WiFi (only support 2.4G, not 5G)
- The effective sensing distance between product main body and accessories is about 1.27cm
- Installation angle: the main body and accessories are installed on the same horizontal plane and can be fixed with 3M glue
- Intrusion reminder: APP reminder (no sound and light reminder)
- With battery low voltage reminder function: APP reminder (no sound and light reminder)
- Battery: 2 x AAA batteries, DC3V, for about 12 months
- The normal standby time is more than 12 months
- Material: Polycarbonate



Door/Window Sensor				
Item No.	Type	Battery	Sensing Distance	Size
Smart-MC8007	WiFi	2 x AAA, DC3V	About 1.27cm	80*29*21mm 46*14*15mm

WiFi Control & Sensors



- Communication protocol: WiFi (only support 2.4G, not 5G)
- Detection distance: Max 8m
- Detection angle: horizontal angle 110 degrees, vertical angle 110 degrees
- Installation method: mounting bracket or 3M glue
- Intrusion reminder: APP reminder (no sound and light reminder)
- With battery low voltage reminder function: APP reminder (no sound and light reminder)
- Battery: 3 x AAA batteries, DC4.5v, for about 18 months
- Material: Polycarbonate



PIR Human Body Infrared Sensor				
Item No.	Type	Colour	Detection Angle	Size
Smart-RT6001	WiFi	White	110°	64*64*80mm



◀ Smart-RT6003-WF-GW



◀ Smart-RT6005-WF-GW

PIR Human Body Infrared Sensor							
Item No.	Type	Colour	Detection Angle	Detection Distance	Standby Current	Size	
Smart-RT6003	WiFi	White	115°	≤ 7M	≤ 20 μa	Φ60*76mm	
Smart-RT6005	WiFi	White	360°	≤ 4m	≤ 20 μa	60*60*20mm	

Smart Control & Sensors



WiFi Control & Sensors



- Communication protocol: WiFi
- APP name: Tuya Smart or Smart Life
- Work with Amazon Alexa/Google Assistance
- Quiescent current: $\leq 30\mu A$
- Low-battery remind function
- Low power undervoltage: $\leq 2.7V$
- WiFi: 802.11b/g/n, 2.4GHz
- Support all Tuya smart product Linkage control
- Working temperature: $-10^{\circ}C \sim 55^{\circ}F$
- Selectable temperature format $^{\circ}C / ^{\circ}F$
- Adjustable temperature/humidity report cycle/sensitivity/range
- Temperature/Humidity high/low/release status will synchronization to app
- Format time 12 / 24H
- Battery life: 10-12months



Tuya Wi-Fi Temperature & Humidity Sensor

Item No.	Type	Battery	Humidity Measurement	Size
Smart-WSD7003	WiFi	AAA1.5V x 3	10-90%RH	60*65*25mm

Smart Control & Sensors



WiFi Control & Sensors



- Communication protocol: WiFi
- USB input: DC5V/ 2A (USB can not use dry battery)
- Input voltage: DC3V LR03*2
- Static current: ≤75uA
- alarm current: ≤60mA
- Low power undervoltage: ≤2.2V
- WiFi: 802.11 b/g/n
- Detection temperature: -10°C-55°C
- Detection humidity: 0-99%RH
- Alarm sound pressure: 55dB
- Installation mode: wall hanging
- Operating temperature: -10°C-60°C
- Operating humidity: 90%RH Max



Tuya Wi-Fi Temperature & Humidity Sensor				
Item No.	Type	USB input	Humidity Measurement	Size
Smart-WSD7004	WiFi	DC5V/2A	0-99%RH	60*65*25mm

WiFi Control & Sensors



- Communication protocol: WiFi (only support 2.4G, not 5g)
- Double induction probe
- Installation angle: any angle
- Water leakage reminder: alarm + APP reminder
- It has the function of battery low voltage reminder: local reminder + APP reminder
- Alarm DB: 115dB@3 inch
- Battery: 3 × AAA batteries, DC4.5V, for about 24 months
- Material: Polycarbonate



Water Flood Sensor				
Item No.	Type	Colour	Alarm dB	Size
Smart-SQ5001	WiFi	White	115dB	90*30mm

WiFi Control & Sensors



- Tuya WiFi light sensor
- Input voltage 12V
- Sensing Range: 1~1000lux
- It can be linked with intelligent lighting products
- Size: 58*33*16mm



Illumination Sensor

Item No.	Type	Colour	Input Voltage	Size
Smart-SAL001	WiFi	White	12V	58*33*16mm



◀ Smart-OTR7201



◀ Smart-WG102

WiFi Smart Remote Control

Item No.	Type	Colour	Working temperature	Working humidity	Working voltage	Size
Smart-OTR7201	WiFi	White/Black	-20°C ~ 55 °C	65% ± 20% RH	2.3V ~ 3.1V (2 × AAA)	37.2*13.5*130mm
Smart-WG102	WiFi	White	0°C - 50°C	≤85%RH	DC 5V/1A	∅64.7*20mm

WiFi Control & Sensors



- Battery type: 2 x LR03AAA dry cell batteries (600mA)
- Static current: < 10uA
- Alarm current: ≤ 160mA
- Low power undervoltage: ≤ 2.7V
- WiFi: 802.11b/g/n
- Working environment: 0°C ~ +40°C
- Working humidity: 95%RH max.



WiFi Smoke Detector

Item No.	Type	Colour	Working Voltage	Size
SCS9001C-3-WF	WiFi	White	3V	9.5*24*18.5mm

- Alarm sound pressure: 70db/1m
- Alarm concentration: 6% LEL ± 3% LEL
- WiFi: 802.11b/g/n
- Detection range: 20m²
- Installation: with socket plugged into the use
- Working temperature: 0-40°C
- Working humidity: 95%RH max.



WiFi Gas Detector

Item No.	Type	Colour	Input Voltage	Size
SCS8001C-3-WF	WiFi	White	85V-250V	48*30*55mm

WiFi Control & Sensors



◀ Smart-YW2002



◀ Smart-QT3001

WiFi Smoke Detector

Item No.	Type	Battery	Alarm Current	Standby Current	Sound Level	Monitoring Range	Work Temperature	Size
Smart-YW2002	WiFi 2.4G	AAA battery * 2	≤ 300 Ma	≤ 30 μ a.	>85dB(3m)	30 m ²	- 10°C ~ + 50°C	Φ128*35mm

WiFi Gas Detector

Item No.	Type	Work Voltage	Mean Power	Alarm Sound	Alarm Density	Monitoring Range	Work Temperature	Size
Smart-QT3001	WiFi 2.4G	AC100-240V	< 2W	75db / M	6% LEL ± 3% LEL	30 m ²	- 10°C ~ + 50°C	102*102*44.7mm

- Support central monitoring function
- With LCD display, supports 32 pcs wireless accessories
- Push with Image & Video Verification
- Can check video verification
- Support Video Monitoring – Live View & Cloud Storage & Two-way talk
- Operate on app/ web
- Backup Rechargeable Battery: lithium DC7.4V, backup lifetime: 4-6 hours
- Gateway offline push on app and web
- Billing Statistic– Balance / Income / Expense
- Operation Statistic– User / Location / Alarm Data/Device Data
- Management– Sales Channel/Privacy Protection



WiFi Alarm System with Central Monitoring Function

Item No.	Type	Input Voltage	Wireless Frequency	Wireless Distance	Size
Smart-TZ102	WiFi 2.4G	DC9V~12V	433MHz	150m(open area)	160*122*15mm

- WiFi+GSM alarm system
- 24 wireless zones for 24 wireless sensors and 10 remote controls
- Big SOS button
- Support iOS/ Android APP
- GSM frequency: 850/900/1800/1900MHz
- Backup Rechargeable Battery: lithium DC7.4V
- 6 groups of alarm phone call, 3 groups of SMS phone No.
- Low battery remind function
- Door sensor two-way communication(Optional)
- Add sensors&remote controls, set alarm phone NO. and SMS message NO. on "Tuya" APP, operate easily
- Linkage the smart switch, wifi camera and other smart home devices



WiFi Alarm System with Central Monitoring Function

Item No.	Type	Input Voltage	Wireless Frequency	Alarm Loudness	Size
Smart-TZ103	WiFi 2.4G	DC9V~12V	433MHz	85db (Internal siren)	118*118*15 mm

Zigbee Control & Sensors



- Communication protocol: ZigBee
- Detection distance: Max 8m
- Detection angle: horizontal angle 110 degrees, vertical angle 110 degrees
- Installation method: mounting bracket or 3M glue
- Intrusion reminder: APP reminder (no sound and light reminder)
- With battery low voltage reminder function: APP reminder (no sound and light reminder)
- Battery: 3 × AAA batteries, DC4.5V, for about 24 months
- Material: Polycarbonate(PC)



PIR Human Body Infrared Sensor				
Item No.	Type	Colour	Detection Angle	Size
Smart-RT6001	ZigBee	White	110°	64*64*80mm

Zigbee Control & Sensors



- Communication protocol: ZigBee
- Temperature display accuracy: 0.1°C
- Humidity measurement range: 0-99% RH, resolution 1% RH
- Installation mode: placed at any angle
- LCD screen: temperature, humidity, electricity display, comfort display
- The normal standby time is more than 12 months
- Battery: 1xCR2032, DC3V
- The normal standby time is more than 12 months
- Material: Polycarbonate



Temperature and Humidity Sensor

Item No.	Type	Battery	Humidity Measurement	Size
Smart-WSD7001	ZigBee	1xCR2032, DC3V	0-99%RH	45*45*13mm

Zigbee Control & Sensors



- Communication protocol: ZigBee
- Double induction probe
- Installation angle: any angle
- Water leakage reminder: alarm + APP reminder
- It has the function of battery low voltage reminder: local reminder + APP reminder
- Alarm DB: 90dB@3 inch
- Battery: 3 x AAA batteries, DC4.5V, for about 24 months
- Material: Polycarbonate



Water Leakage Sensor

Item No.	Type	Colour	Alarm dB	Size
Smart-SQ5001	ZigBee	White	90dB	90*30mm



◀ Smart-SQ5005



◀ Smart-SQ5006

Water Leakage Sensor

Item No.	Type	Battery	Operating Temperature	Working humidity	Wireless Standard	Size
Smart-SQ5005	ZigBee	CR2450	-10°C-55°C	10%-90%RH	Zigbee802.15.4	Φ60*34*18mm
Smart-SQ5006	ZigBee	CR2450	-10°C-55°C	10%-90%RH	Zigbee802.15.4	Φ53*16.6mm

Zigbee Control & Sensors



- Communication protocol: ZigBee
- The effective sensing distance between product main body and accessories is about 1.27cm~2.54cm
- Installation angle: the main body and accessories are installed on the same horizontal plane and can be fixed with 3M glue
- Intrusion reminder: APP reminder (no sound and light reminder)
- With battery low voltage reminder function: APP reminder (no sound and light reminder)
- Battery: 1xCR2032, DC3V
- The normal standby time is more than 24 months
- Material: Polycarbonate



Door/Window Sensor				
Item No.	Type	Battery	Sensing Distance	Size
Smart-MC8001	ZigBee	1xCR2032, DC3V	About 1.27cm~2.54cm	56*28*14mm 38*14*11mm

Zigbee Control & Sensors



- Product Name: Smart Zigbee Gateway
- Power Input: 5V1A
- Working Current: <1A
- Operating Temperature: -10 C-55 C
- Working humidity: 10%-90%RH (Non-condensing)
- Wireless Standard: WiFi802.11b/g/n Zigbee802.15.4
- Net Weight: 33g

Smart Zigbee Gateway				
Item No.	Type	Power Input	Working Current	Size
Smart-WG102	ZigBee	5V1A	<1A	60.5*60.5*15mm



- Tuya WiFi light sensor
- Input voltage 12V
- Sensing range: 1~1000lux
- It can be linked with intelligent lighting products
- Size: 58*33*16mm

Illumination Sensor				
Item No.	Type	Colour	Input Voltage	Size
Smart-SAL001	ZigBee	White	12V	58*33*16mm



- Function: TUYA Smart ZigBee
- Size: 37.15*13.45*130.2mm
- Weight: 31g
- Material: ABS, PC + 15% titanium dioxide, silicone, SUS304, titanium steel
- Working voltage: 2.3V ~ 3.1V (2 x AAA batteries)
- Warranty: 2 years
- Key working life: 10000 times
- Working temperature: - 20°C ~ 55°C
- Working humidity: 65% ± 20% RH

Remote Control				
Item No.	Type	Colour	Key Lifetime	Size
Smart-OTR7201	ZigBee	White/Black	10000	37.2*3.5*130.2mm





Camera & NVR Sets

- WIFI Outdoor Camera
- WIFI Indoor Camera

WiFi Outdoor Camera

IP66

CE

RED

RoHS

FC

IEC

emc

Support Solar Charging & Standby For 180 Days



Solar/Battery Dual Power Supply



Move Monitoring




Remote Monitoring



Voice Intercom



Supporting Simultaneous Binding of Multiple Devices

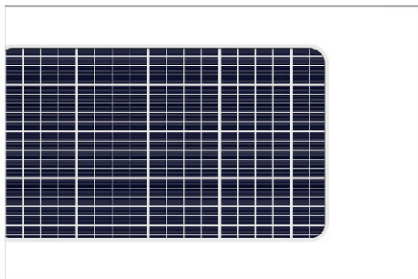

Farewell to the wiring trouble, Solar monitoring



Application: Outdoor fish ponds, Outdoor farm, Outdoor construction site, Outdoor orchard.

WiFi Outdoor Camera						
Item No.	Power supply mode	Infrared Detection Range	Pixel	Material	Life Time	Size
Smart-IS101SP	Solar energy +usb	25-30m	2MP	Stainless Steel	15000h	195*95*67mm

WiFi Outdoor Camera

IP65

CE

RED

RoHS

FC

IEC

emc

With Disk Bracket & Power Adapter



Solar/battery Dual Power Supply



Move Monitoring




Remote Monitoring



Voice Intercom



Supporting Simultaneous Binding Of Multiple Devices

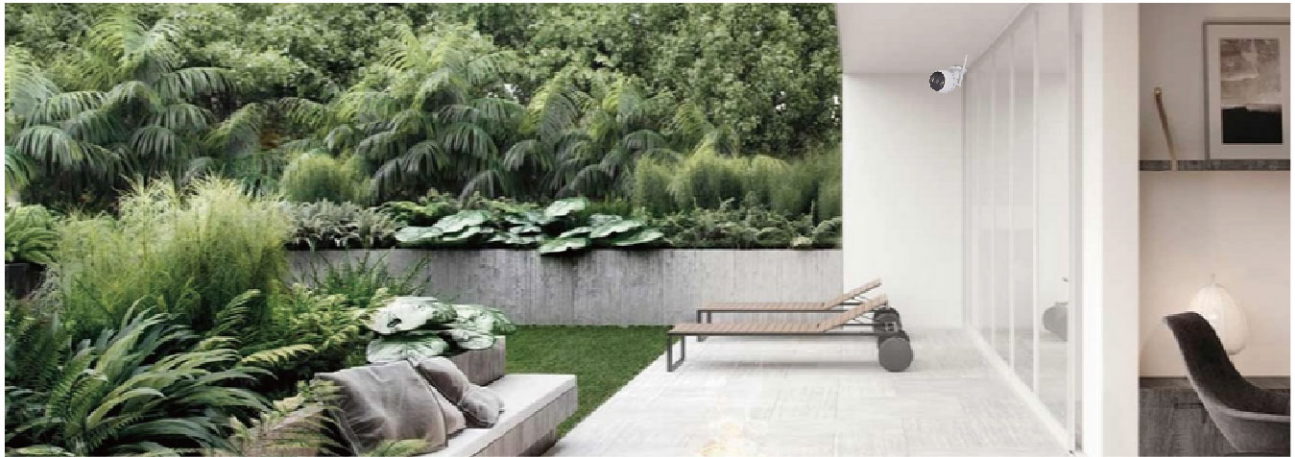

WiFi Outdoor Camera						
Item No.	Voltage	Frequency	Infrared Detection Range	Resolution	Material	Size
Smart-CNC01	100-240V	50-60Hz	25-30m	720P/1080P	Plastic	67*85*105mm

Camera & NVR Sets

WiFi Indoor Camera



Smart-CNI01

- Support body tracking
- With disk bracket & power adapter
- Power adapter: input voltage (100-240V/50-60HZ) output voltage (5V/1.5A)
- 720P/1080P
- Rotation angle: horizontal: 355°; vertical: 90°
- 113*113*100mm



Smart-CNI02

- Support body tracking
- With disk bracket & power adapter
- Power adapter: input voltage (100-240V/50-60HZ) output voltage (5V/1.5A)
- 720P/1080P
- Rotation angle: horizontal: 355°; vertical: 90°
- 65*65*119mm



Smart-CNI04

- With disk bracket
- Power adapter: input voltage (100-240V/50-60HZ) output voltage (5V)
- 720P/1080P
- Rotation angle: manual adjustment
- 58*40*150mm



Smart-CNI05

- With disk bracket
- Power adapter: input voltage (100-240V/50-60HZ) output voltage (5V)
- 720P/1080P
- Rotation angle: manual adjustment
- 67*85*105mm



WiFi



Network Port



Night Vision



Voice Intercom



Cloud Storage



TF Card(8-128G)




Motion Detection



Phone Push Alarm



Support multi device simultaneous viewing

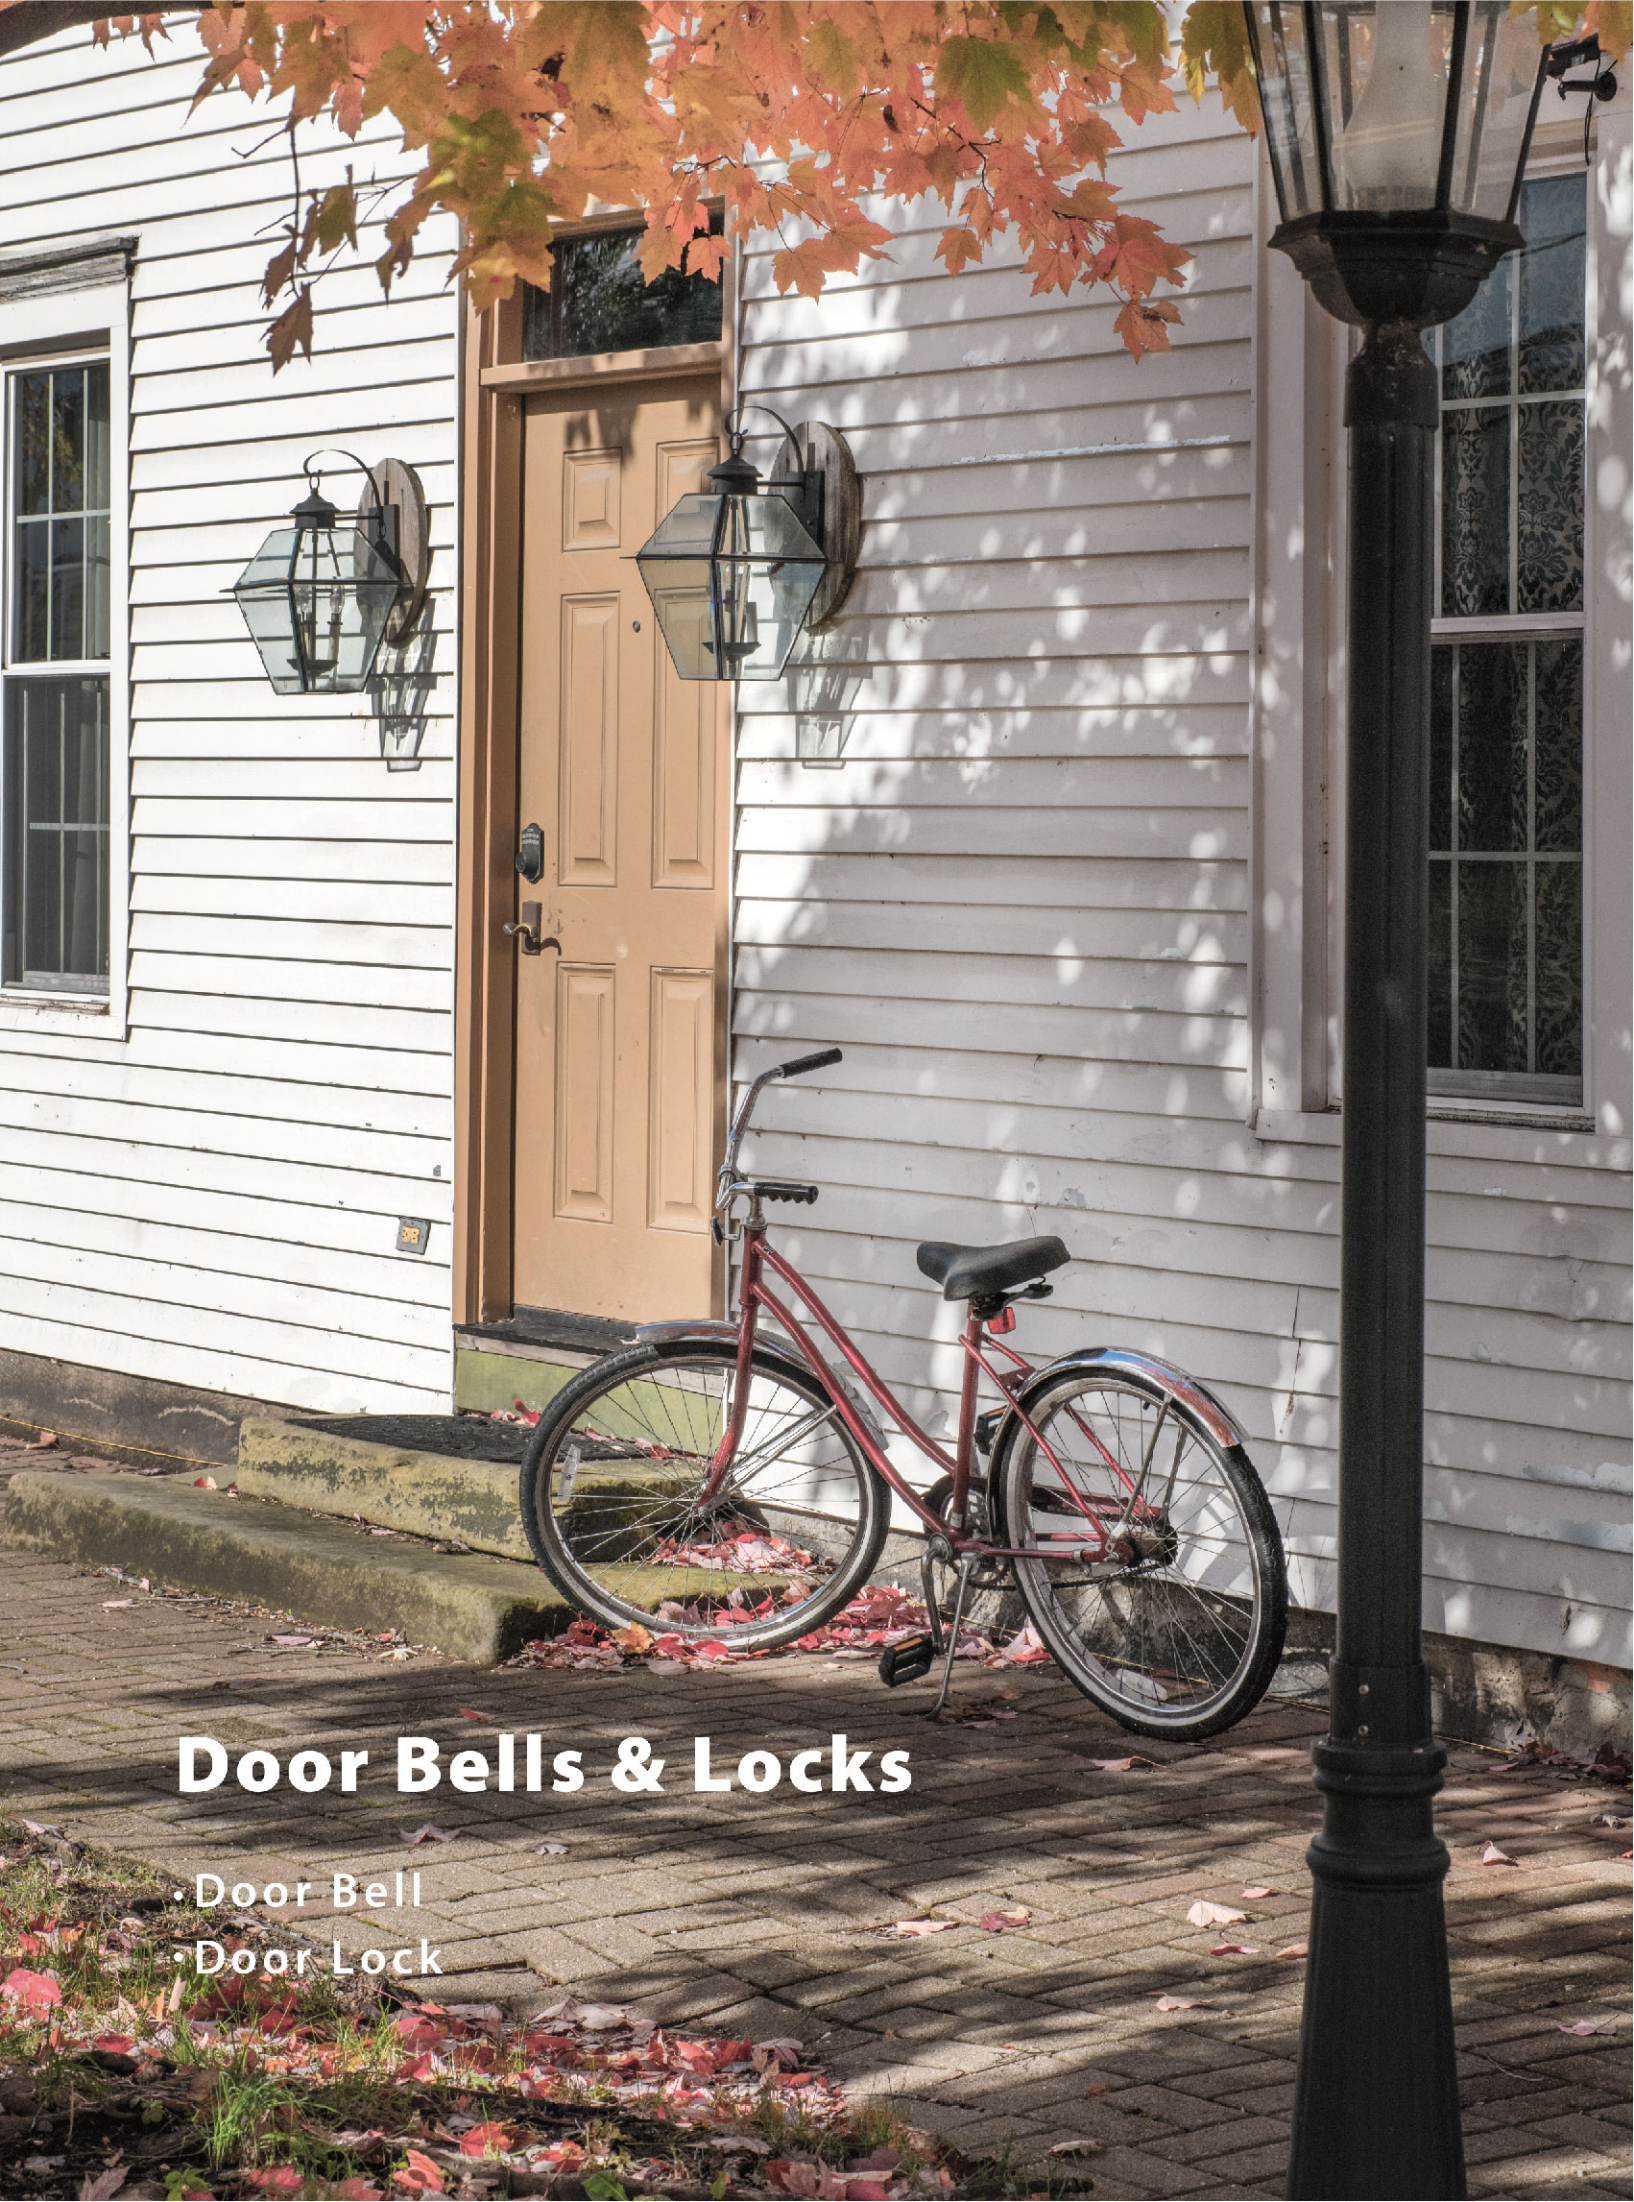


Door Bells & Locks

- Door Bell
- Door Lock



Intelligent Cat Eye Visual Door Bell

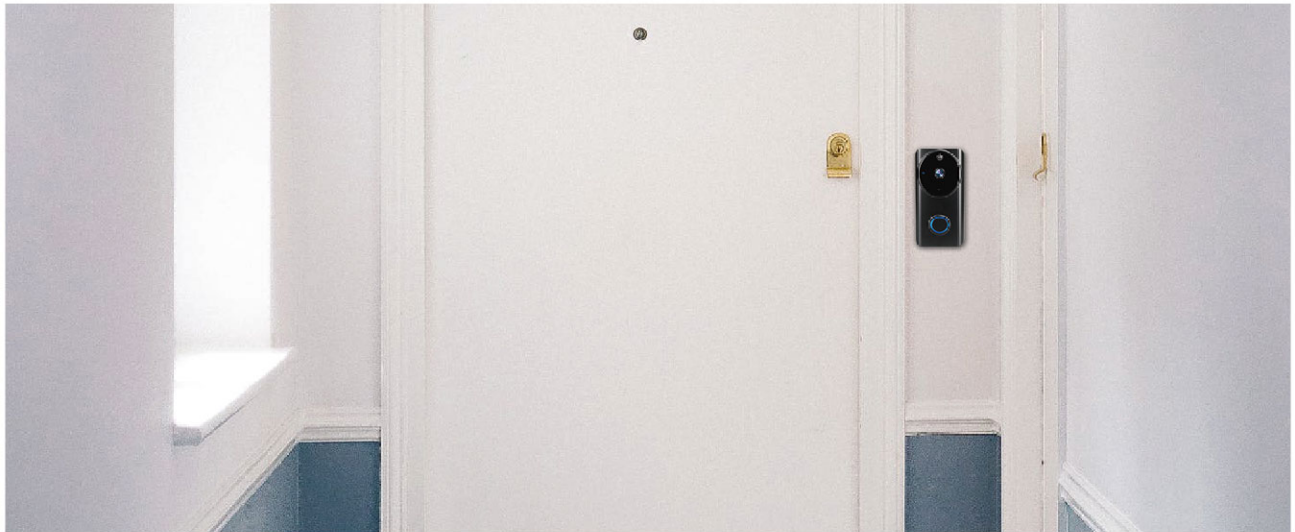

Bidirectional Speech



APP Real Time Viewing



Infrared Night Vision



Movement Detection

- Resolution: 1920 * 1080;
- The angle of the lens: 166 degrees;
- Six 850mm infrared lamps;
- Audio two-way intercom, built in echo cancellation;
- Recording: SD card recording and VOD;
- Storage: 8G/16G/32G/64G;
- Batteries: 2*18650 batteries (optional);
- Motion detection, PIR infrared detection;
- Wake up mode: key wake-up, PIR detection wake-up, mobile phone wake-up;
- Push within 1sec.

Intelligent Cat Eye Visual Door Bell

Item No.	Type	Colour	Resolution	Size
Smart-DB001S	Wifi	Black	1920*1080	30*66*136mm



- Resolution: 1920 * 1080;
- The angle of the lens: 166 degrees;
- Six 850mm infrared lamps;
- Audio two-way intercom, built in echo cancellation;
- Recording: SD card recording and VOD;
- Storage: 8G/16G/32G/64G;
- Batteries: 2*18650 batteries (optional);
- Motion detection, PIR infrared detection;
- Wake up mode: key wake-up, PIR detection wake-up, mobile phone wake-up;
- Push within 1sec.

Intelligent Cat Eye Visual Door Bell

Item No.	Type	Colour	Resolution	Size
Smart-DB002S	Wifi	Black	1920*1080	30*75*142mm



Door Bells & Locks

Intelligent Door Lock



Fingerprint



APP



Card



Bluetooth®

- Identification method: fingerprint, card, smart phone;
- Standard lock body: single pin lock body/60-70mm adjustable;
- Door thickness: 30-80mm;
- Material: zinc alloy/alum alloy/PC + ABS fireproof material;
- Capacity: fingerprint < 50 pcs;
- Battery: 3.3v/2 * alkaline rod
- Sound and light alarm: color light / buzzer
- Working temperature: -20 °C ~ +65 °C

Intelligent Door Lock

Item No.: DL103-001

Voltage: 6V/AC

Material: Stainless steel

Size: 365.5*76*25mm





Dimmer Switch & Outlets

- Switch
- Office Desk Socket

Dimmer Switch & Outlets



Resilient Smart Wall Switch

- TUYA WIFI Control
- Support Timing & Countdown Function
- Support Alexa And Google Home

Item No.	Type	Voltage [V/AC]	Wattage	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
Smart-WSG04-301	1 Gang Switch	220-240V	1000W	86*86*41	60/0.030/7.1
Smart-WSG04-302	2 Gang Switch	220-240V	1000W	86*86*41	60/0.030/7.7
Smart-WSG04-303	3 Gang Switch	220-240V	1000W	86*86*41	60/0.030/8.3



CE ErP RED


Wireless Self Generating Smart Wall Switch

- TUYA WIFI & RF Wireless Control
- Wiring Free
- Resilient Panel
- Control distance: 25m (indoor) about 70m (outdoor)
- Support Timing & Countdown Function



Item No.	Type	Voltage [V/AC]	Working Frequency	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
Smart-WSG02-301	1 Gang Switch	/	433MHz	PC	86*86*13.9	60/0.038/13.2
Smart-WSG02-302	2 Gang Switch	/	433MHz	PC	86*86*13.9	60/0.038/13.5
Smart-WSG02-303	3 Gang Switch	/	433MHz	PC	86*86*13.9	60/0.038/13.5
Smart-WSG02-AW	Controller	100-240	433MHz/2.4GHz	PC	60*32*23	60/0.038/13.5

Dimmer Switch & Outlets

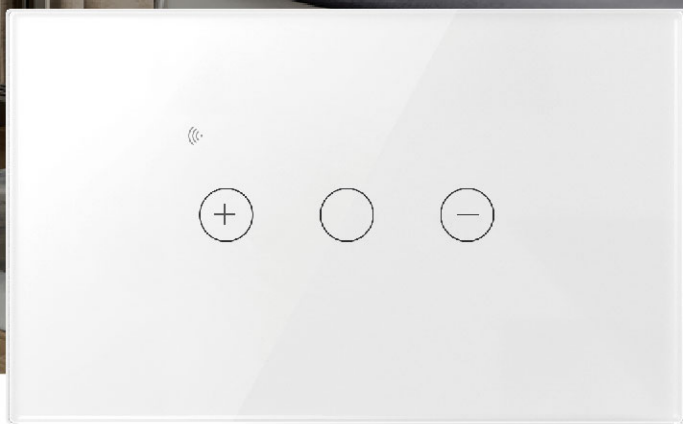

WiFi Dimmer Switch

Various Control Modes



Touch Switch



APP Control



Voice Control




Color



Item No.	Voltage [V/AC]	Max.Load [W]	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
ST-WS70011-400W3-WF2-G1	100-240	400	50000	PC+Toughened Glass	118*72*39	40/0.028/7.7

Dimmer Switch & Outlets

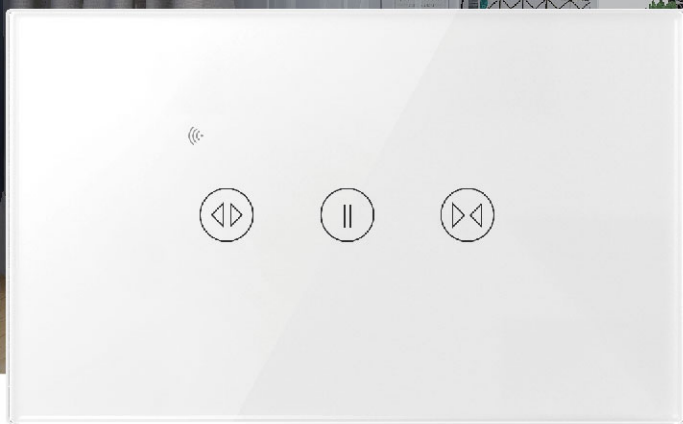

WiFi Curtain Switch

Various Control Modes



Touch Switch




APP Control



Voice Control



Color

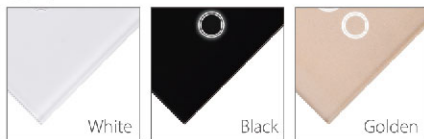

Item No.	Voltage [V/AC]	Max.Load [W]	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
ST-WS80021-600W3-WFT-G1	110-240	400	50000	Flame Retardant PC+Toughened Glass	118*72*39	40/0.028/8.2

Dimmer Switch & Outlets

Touch Sensitive Smooth



Slim Design




Tempered Glass Surface



Characteristic

- Toughened glass touch switch
- Support intelligent speaker control
- Direct networking without gateway
- Multigroup timing
- Switch between multiple devices with one click
- Night light indicator

CE ErP RED

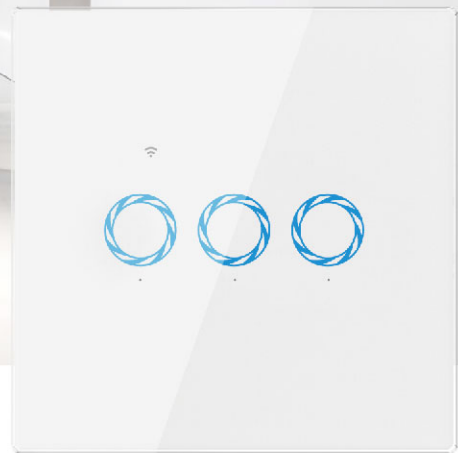

European Touch Switch

Various Control Modes



Touch Switch



APP Control



Voice Control



Random Paste





works with
Google Assistant



works with
amazon alexa

Color

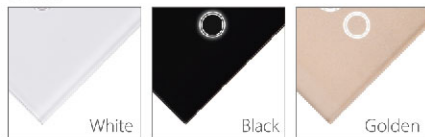

Item No.	Type	Voltage [V/AC]	Max.Load [W]	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
Smart-WSG01-301-W	1 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	86*86*36	60/0.038/13.2
Smart-WSG01-301-W	2 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	86*86*36	60/0.038/13.5
Smart-WSG01-301-W	3 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	86*86*36	60/0.038/13.5

Dimmer Switch & Outlets

Europe Type Switch



WS132-14 Series



Flame Retardant
Grade V0

ABS+Cu Panel

Item No.	Type	Voltage [V/AC]	Current [A]	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WS132-14-301	1 Gang Switch	250	10	50000	ABS+Cu	68*68*35	100/0.035/10
WS132-14-302	1 Gang 2 Way Switch	250	10	50000	ABS+Cu	68*68*35	100/0.035/10
WS132-14-303	2 Gang Switch	250	10	50000	ABS+Cu	68*68*35	100/0.035/10
WS132-14-304	2 Gang 2 Way Switch	250	10	50000	ABS+Cu	68*68*35	100/0.035/10
WS132-14-401	Shuko Socket	250	16	50000	ABS+Cu	68*68*35	100/0.035/10
WS132-14-412	Shuko Socket Double	250	16	50000	ABS+Cu	117*86*45	100/0.035/10
WS132-14-305	1 Gang Switch with Indicator	250	10	50000	ABS+Cu	68*68*35	100/0.035/10
WS132-14-306	2 Gang Switch with Indicator	250	10	50000	ABS+Cu	68*68*35	100/0.035/10
WS132-14-409	1 Gang Socket	250	10	50000	ABS+Cu	68*68*35	100/0.035/10
WS132-14-411	1 Gang Socket with Earthing	250	10	50000	ABS+Cu	68*68*35	100/0.035/10



Dimmer Switch & Outlets

Touch Sensitive Smooth



Slim Design



Tempered Glass Surface



Characteristic

- Toughened glass touch switch
- Support intelligent speaker control
- Direct networking without gateway
- Multigroup timing
- Switch between multiple devices with one click
- Night light indicator

FC



American Touch Switch

Various Control Modes



Touch Switch



APP Control



Voice Control



Random Paste





works with
Google Assistant



works with
amazon alexa

Color

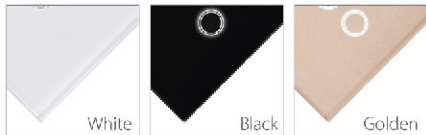

Item No.	Type	Voltage [V/AC]	Max.Load [W]	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
Smart-WSU01-301-W	1 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	118*72*39	40/0.023/7.6
Smart-WSU01-302-W	2 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	118*72*39	40/0.023/8.2
Smart-WSU01-303-W	3 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	118*72*39	40/0.023/8.4

Dimmer Switch & Outlets

American Type Switch



Ws162-02 Series



Flame Retardant
Grade V0



ABS Panel



Warranty For
5 Years


Item No.	Type	Voltage [V/AC]	Current [A]	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
WS162-02-301	1 Gang Switch	250	10	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-302	1 Gang 2 Way Switch	250	10	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-303	2 Gang Switch	250	10	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-304	2 Gang 2 Way Switch	250	10	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-401	Shucko Socket	250	15	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-412	Shucko Socket Double	250	15	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-432	TV	250	/	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-438	TEL	250	/	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-442	Data	250	/	50000	ABS+Cu	118*75*35	200/0.035/11
WS162-02-219	Dimmer	250	/	50000	ABS+Cu	118*75*35	200/0.035/11



Dimmer Switch & Outlets

American Type Switch

GFCI Socket

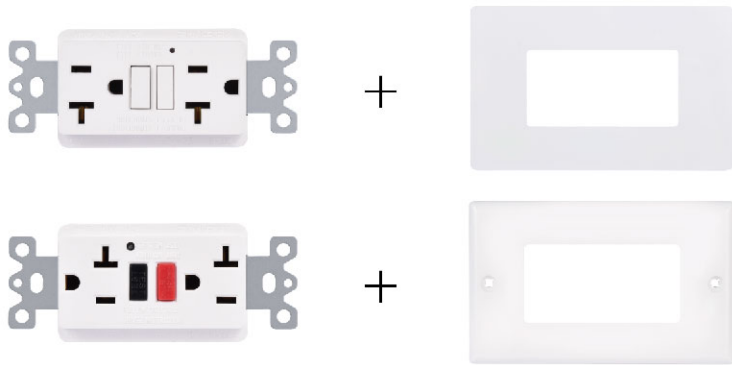

Item No.	Voltage [V/AC]	Current [A]	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m²/KG]
WS162-01-501	125	20	50000	PC	118*75*35	60/0.032/11
WS162-03-501	125	20	50000	PC	118*75*35	60/0.032/11

WIFI USB Wall Socket



Item No.	Type	Voltage [V/AC]	Current [A]	USB Output	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m²/KG]
WSU03-231	Double USB+Socket	100-250	15	5V/2.4A	50000	PC	118*72*45.5	60/0.060/14



Dimmer Switch & Outlets

Touch Sensitive Smooth



Slim Design



Tempered Glass Surface



Characteristic

- Toughened glass touch switch
- Support intelligent speaker control
- Direct networking without gateway
- Multigroup timing
- Switch between multiple devices with one click
- Night light indicator

CE  ErP RED



British Touch Switch

Various Control Modes



Touch Switch



APP Control



Voice Control



Random Paste





works with
Google Assistant



works with
amazon alexa

Color

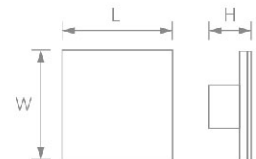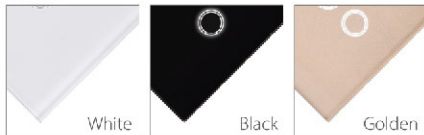

Item No.	Type	Voltage [V/AC]	Max.Load [W]	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
Smart-WSE02-301-W	1 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	86*86*35	60/0.038/13.2
Smart-WSE02-302-W	2 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	86*86*35	60/0.038/13.5
Smart-WSE02-303-W	3 Gang Switch	100-240	1000	50000	Flame Retardant PC+Toughened Glass	86*86*35	60/0.038/13.5

Dimmer Switch & Outlets

Australian Type Switch



Surface Mount Plug

- Item No.: WSA06
- Voltage: AC100-250V
- Material: PC
- Max Power: 2500W
- Max Current: 10A
- Size: 89*62*50.5mm
- Packing: 200/0.061/14.5



Dimmer Swich & Outlets

Office Desk Socket



▲ Application : Desktop




Desktop Socket(USB)

Item No.: WST02-G
Current: 16A
Voltage: AC230V
USB Output: 2*5V/2.1A
Wire Size: 1.5mm²
Line Lenth: 2m
Material: Aluminium Alloy+PC
Size: Ø60*367mm
Packing: 20/0.087/19.0




Desktop Socket

Item No.: WST01-G
Current: 16A
Voltage: AC230V
Wire Size: 1.5mm²
Line Lenth: 2m
Material: Aluminium Alloy+PC
Size: Ø60*325mm
Packing: 20/0.079/18.0

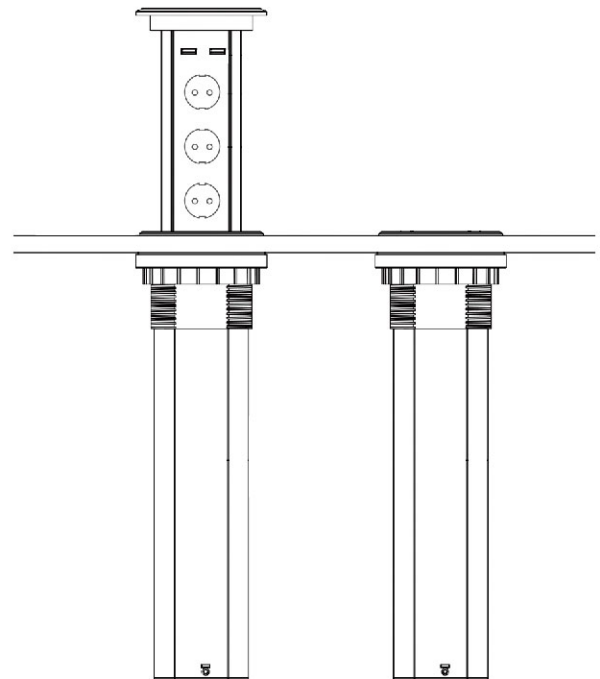

Sketch Map

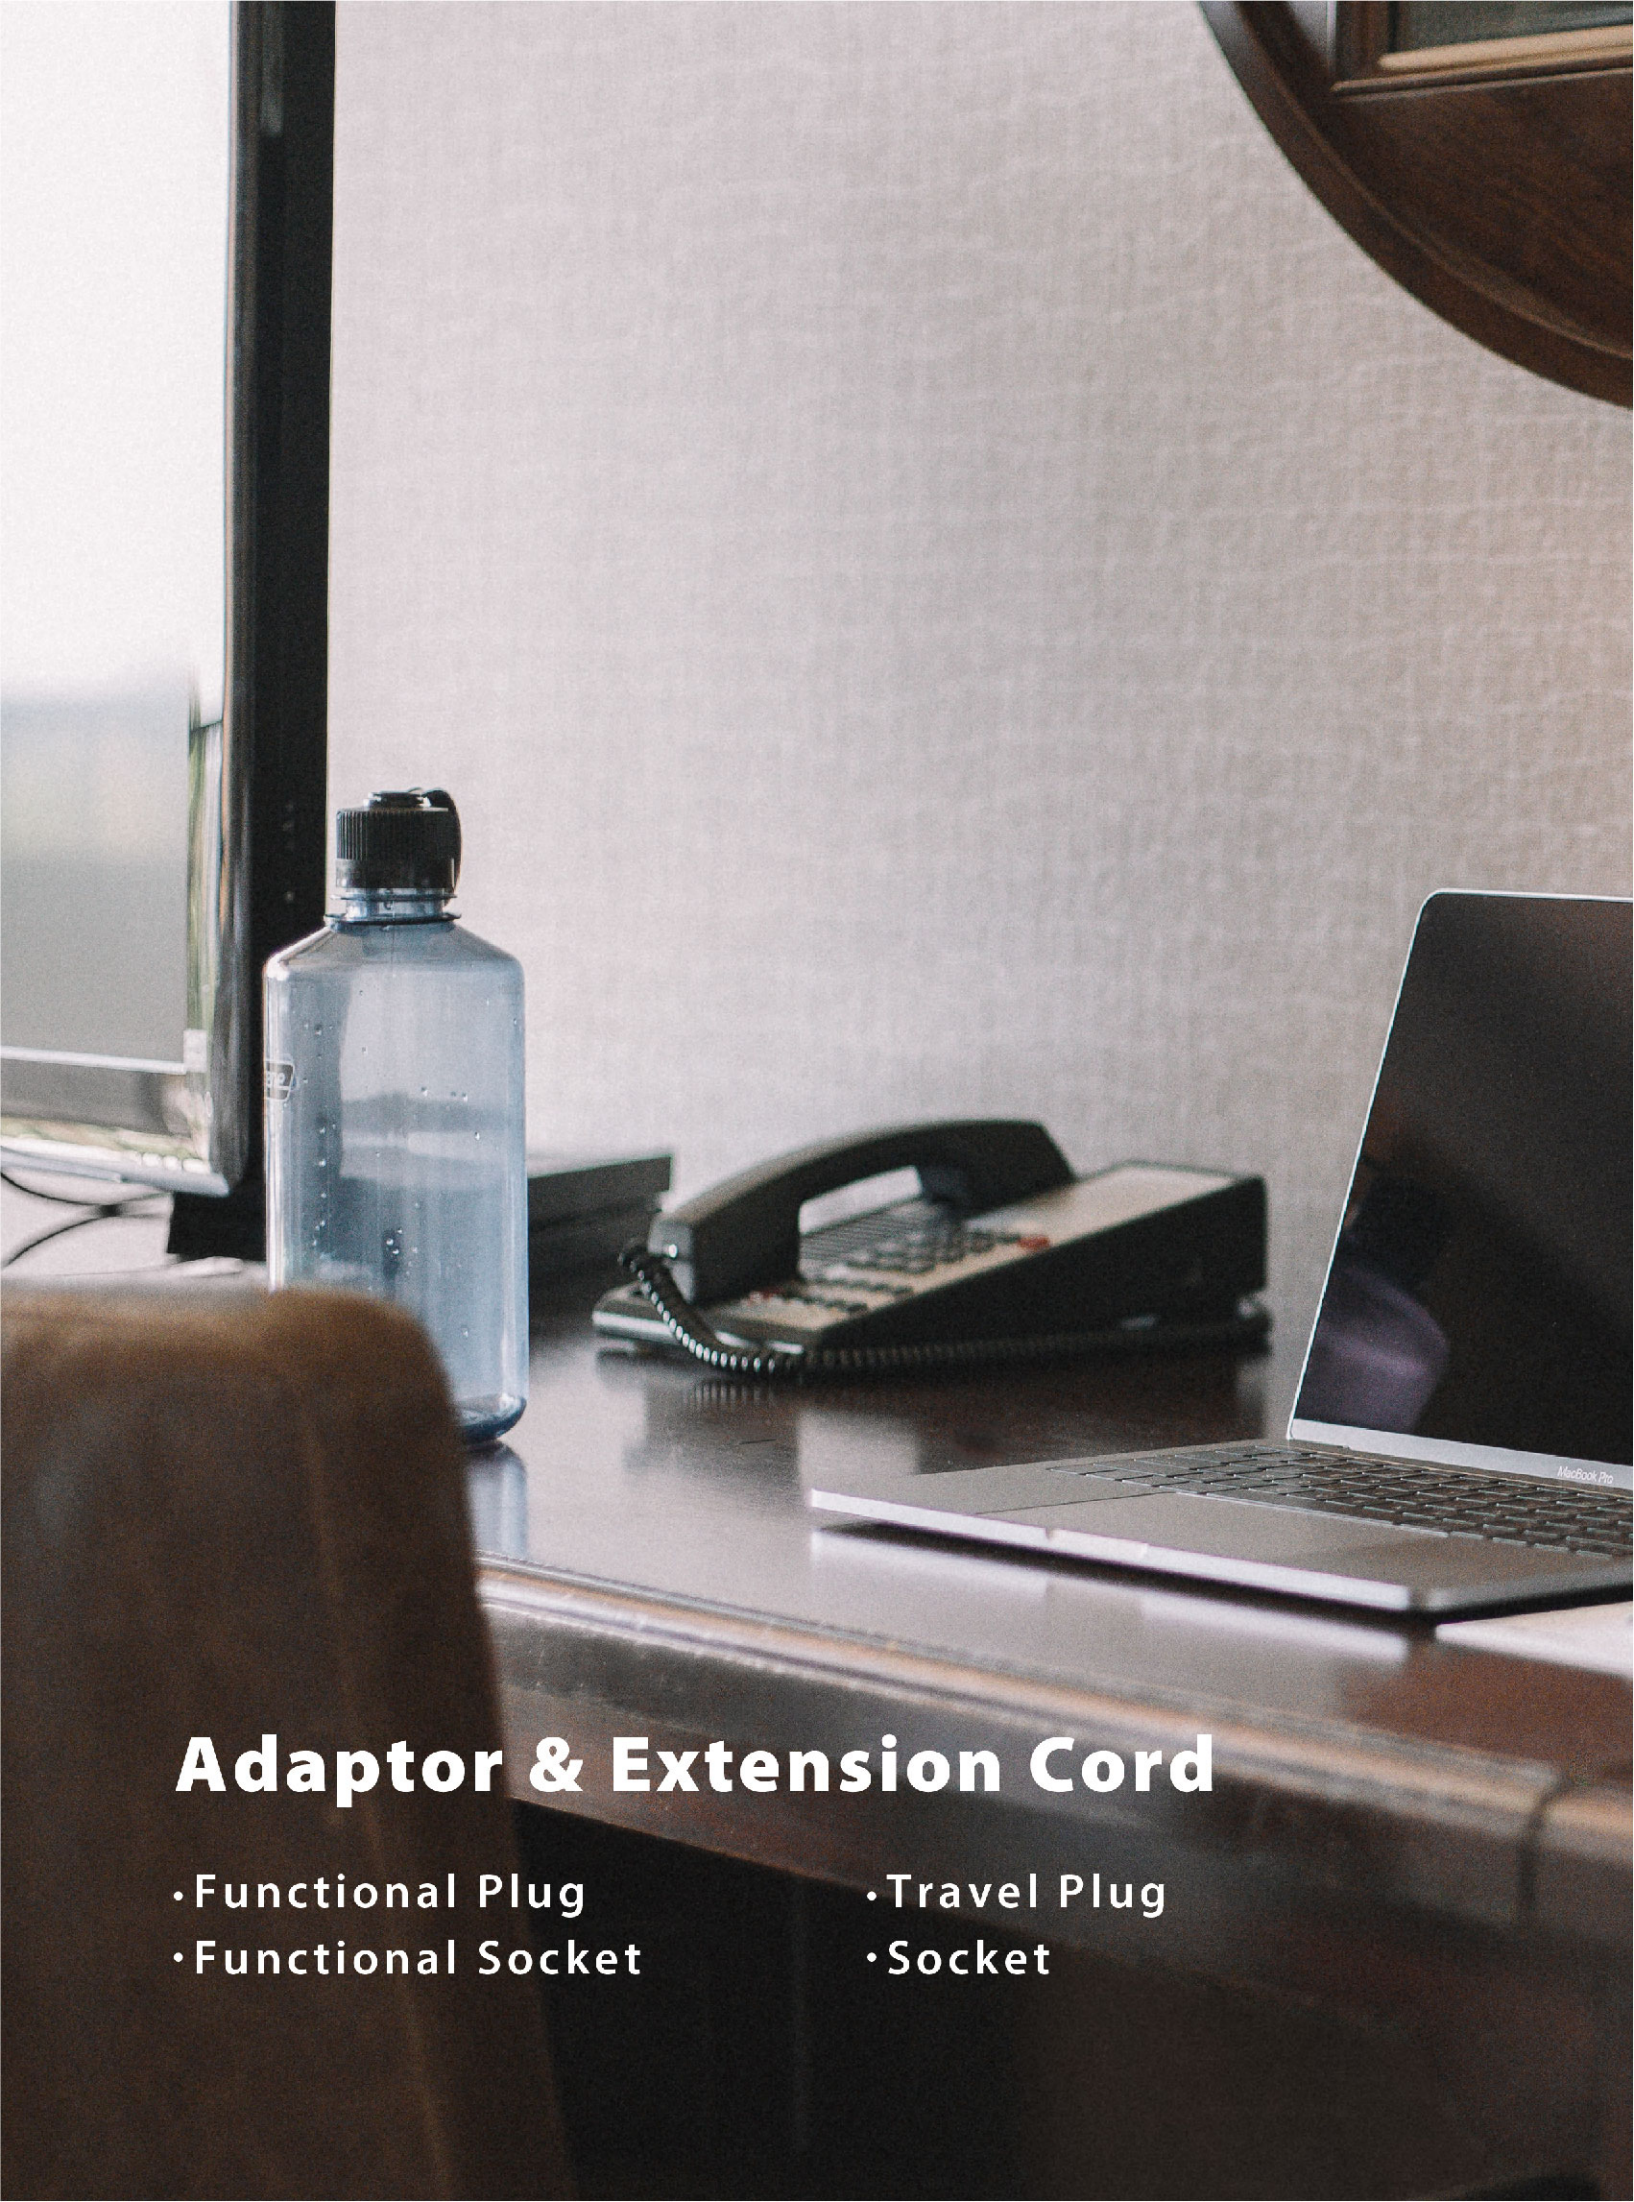

Adaptor & Extension Cord

- Functional Plug
- Functional Socket
- Travel Plug
- Socket

Adaptor & Extension Cord

Functional Plug

Child Protection

Metering

CE

RoHS



▲ Applications: Company, Family



German

Item No.: Smart-PFW04-G
Voltage: AC100-240V

Max Current: 16A
Packing: 60/0.038/11.7

Max Power: 3680W
Material: PC+ABS

Size: 52*52*83mm



French

Item No.: Smart-PFW04-F
Voltage: AC100-240V
Max Current: 16A
Packing: 60/0.038/12.0

Max Power: 3680W
Material: PC+ABS
Size: 52*52*80mm



American

Item No.: Smart-PFW01-U
Voltage: AC110-130V
Max Current: 10A
Packing: 215/0.031/11.0

Max Power: 1200W
Material: PC
Size: Ø50*52mm



British

Item No.: Smart-PFW02-E
Voltage: AC100-240V
Max Current: 13A
Packing: 200/0.052/11.0

Max Power: 2990W
Material: PC
Size: 57*57*61mm



American

Item No.: Smart-PFW07-U
Voltage: AC110-130V
Max Current: 10/15A
Packing: 100/0.03/10.4

Max Power: 1200/1800W
Material: PC
Size: 70*38*51mm



Argentinian

Item No.: Smart-PFW03-R
Voltage: AC120-240V
Max Current: 10A
Packing: 200/0.032/11.0

Max Power: 2200W
Material: PC
Size: 53.6*45.6*50.2mm



Power Meter Plug(German)

Item No.: PFW08-G
Voltage: AC220-240V
Max Current: 16A
Functions: electricity statistics, double rate, white backlight
Packing: 50/0.048/9.5

Max Power: 3680W
Material: PC
Size: 62*77*130mm

Adaptor & Extension Cord

Functional Plug

Child Protection

Metering

CE

RoHS



▲ Applications : Company, Family

Brazilian

Metering



Item No.: ST-PAS7002-2200W3-WF/MF
 Voltage: AC100-240V
 Current: 10A
 Power: 2200W
 Material: PC
 Size: 76x38x64.2mm

Brazilian

Metering



Item No.: ST-PAS7003-3520W3-WF/MF
 Voltage: AC100-240V
 Current: 16A
 Power: 3520W
 Material: PC
 Size: 76x38x64.2mm

Timer(German)



Item No.: AS141-04 Max Power: 3680W
 Voltage: AC220-240V Max Timing Range: 24H
 Max Current: 16A Min Timing Range: 30min
 Material: PC Size: 62*72*100mm
 Packing: 48/0.060/7.0

Wired Timer



Item No.: AS142-07 Max Power: 3600W
 Voltage: AC220-240V Max Timing Range: 1min
 Max Current: 16A Min Timing Range: 7days
 Material: PC Size: 90*64*36mm
 Packing: 100/0.072/14.5

Adaptor & Extension Cord

Functional Plug



Leakage Protection



▲ When a leakage fault occurs, it has overload and short-circuit protection functions.



Item No.	Voltage [V]	Frequency [Hz]	Current [A]	Material	Durability [times]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
AS110-003	100-240	50-60	6	ABS	10000	73*50*39	100/0.040/11

Adaptor & Extension Cord

Functional Plug



APP Control



Voice Control



works with
Google Assistant
works with
amazon alexa



Item No.	Voltage [V]	Frequency [Hz]	Current [A]	Material	Durability [times]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
AS110-003	100-240	50-60	6	ABS	10000	73*50*39	100/0.040/11



Item No.	Voltage [V]	Frequency [Hz]	Current [A]	Material	Durability [times]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
AS110-003	100-240	50-60	6	ABS	10000	73*50*39	100/0.040/11

Adaptor & Extension Cord

Travel Plug

Child Protection



▲ Applications : Company, Family



Item No.	Voltage [V]	Frequency [Hz]	Current [A]	Material	Durability [times]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
AS110-003	100-240	50-60	6	ABS	10000	73*50*39	100/0.040/11

Plug

Child Protection



Item No.	Voltage [V]	Current [A]	Material	Durability [times]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
PCG04-3H	250	16+2*6	PP	10000	93*76.5*69.3	60/0.030/5.0



Item No.	Voltage [V]	Current [A]	Material	Durability [times]	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
PCG03-4H	250	16*3	PC	10000	73*50*39	60/0.032/11.0

Adaptor & Extension Cord

Functional Socket



▲ Applications : Indoor Scene



◀ Smart-SFG01-4H
With a Switch



◀ Smart-SFU01-4H
With a Switch



◀ Smart-SFF01-4H
With a Switch



◀ Smart-SFE02-4H
With a Switch

Item No.	Voltage [V/AC]	Current [A]	Power [W]	Type	Wire Size [mm ²]	Line Length [mm]	USB Output	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
Smart-SFG01-4H	100-240	10	2400	German	0.75/1/1.5	1.5/1.8/3	4*5V/2.4A	PC+ABS	335*65*41	24/0.060/14.8
Smart-SFF01-4H	100-240	10	2400	French	0.75/1/1.5	1.5/1.8/3	4*5V/2.4A	PC+ABS	335*65*41	24/0.060/14.8
Smart-SFU01-4H	100-240	15	1800	Americn	0.75/1/1.5	1.5/1.8/3	4*5V/2.4A	PC+ABS	310*62*32	24/0.057/14.6
Smart-SFE02-4H	100-240	10	2400	British	0.75/1/1.5	1.5/1.8/3	4*5V/2.4A	PC+ABS	428*62.3*32.8	24/0.060/14.8

Adaptor & Extension Cord

Socket



▲ SFU02-4H



▲ SFU03-4H

Item No.	Voltage [V/AC]	Current [A]	Power [W]	USB Output	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
SFU02-4H	110-250	10	2500	2*5V/1.5A	ABS	70*70*97	216/0.031/11.0
SFU03-4H	110-250	10	2500	2*5V/1.5A	ABS	70*70*97	216/0.031/11.0



▲ AS541-03S/AS541-04S/AS541-05S/AS541-06S

Max voltage:250V Max current:10A Max power:2500W Wire gauge:3*1mm²
3/4/5/6 ways socket-outlet with a switch



▲ AS541-03/AS541-04/AS541-05/AS541-06

Max voltage:250V Max current:10A Max power:2500W Wire gauge:3*1mm²
3/4/5/6 ways socket-outlet

Adaptor & Extension Cord

Socket



Item No.	Voltage [V/AC]	Frequency [Hz]	Current [A]	Power [W]	Type	Durability [times]	Material	Size [L*W*Hmm]	Packing [Pcs/m²/KG]
SCG01-3H	250	50-60	10	2500	German	50000	PP	165*42*38	30/0.028/6.8
SCG02-3H	250	50-60	10	2500	German	50000	PP	165*50*41	30/0.030/6.8
SCG03-3H	250	50-60	16	2500	German	50000	PP	195*50*41	30/0.033/15.0
PS106-003	110	50-60	15	1875	American	50000	PVC	292*43*28	40/0.032/18.0

Extension Cable



Item No.	Voltage [V/AC]	Frequency [Hz]	Current [A]	Power [W]	Type	Length [m]	Durability [times]	Material	Packing [Pcs/m²/KG]
PS541-01-2M	250	50-60	16	3680	EU	2	20000	PVC+Cu	60/0.041/22.3
PS541-01-3M	250	50-60	16	3680	EU	3	20000	PVC+Cu	50/0.041/24.2
PS541-01-5M	250	50-60	16	3680	EU	5	20000	PVC+Cu	30/0.0389/21.4

Wire Reel



Item No.	Voltage [V/AC]	Frequency [Hz]	Current [A]	Power [W]	Length [m]	Durability [times]	Material	Packing [Pcs/m²/KG]
AS534-01	250	50-60	16	2990	40	50000	PP+Cu	2/0.060/14.8
AS533-02	250	50-60	16	3680	25/50	50000	PVC+Cu	2/0.034/12.9