

# LED Lighting Catalogue

LED Strip Lights & LED String Lights **2022**

**ERIK C**<sup>®</sup>  
concepts

# Optional glue



## White glue

Excellent durability. Good temperature tolerance, short-term 120°C temperature resistance, long 90°C temperature resistance; Waterproof, good resilience, strong adhesion.



## Brown glue

Relatively thin thickness. Can prevent shedding and excellent waterproof performance, good temperature resistance.



## Red glue

Acrylic material. Good stickiness, strong adhesion, uv, moisture-proof, waterproof, temperature resistant. suitable for household , car and elastic.



## Blue glue

With high tightness. Water resistance, heat resistance, strong resistance to chemicals.

# Installation diagram LED Strip

## Outdoor Installation

When used the LED strip outdoor , it will go through the rain and wind, multiple temperature change, after some time, the adhesiveness of 3M tape will become lower, so that the led strip will be fall off from the installation site.


So it is better to use some plastic buckles to fasten the strip. The way to cut and connect the strip will be same as the indoor use.

Better to use some glue on the connect site to keep it all waterproof.

## Indoor Installation

Very LED strip has 3M tape on the backside FPC, when installation, you can uncover the 3M tape, and stick the strip on the installation site.

Better to use some glue on the connect site to keep it all waterproof.

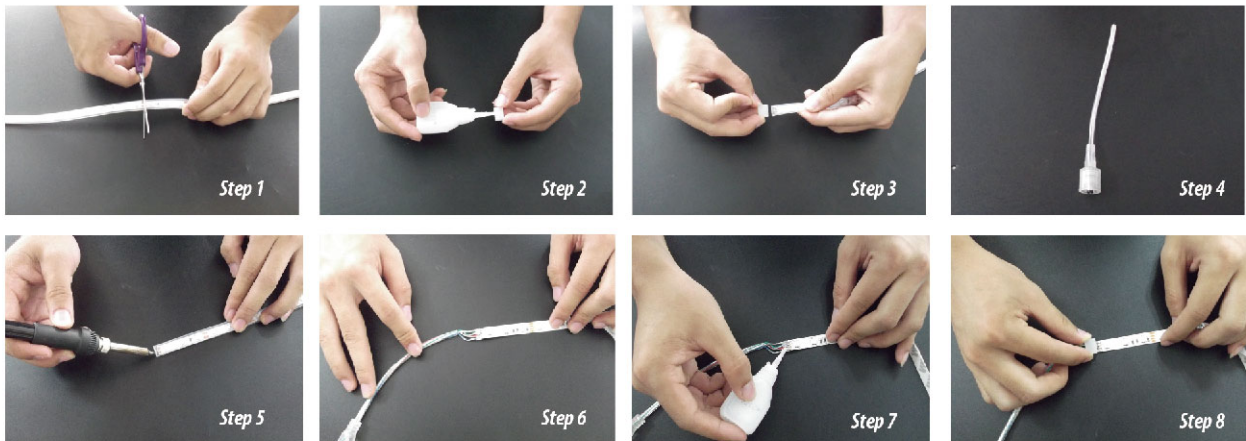



# High CRI




A colour rendering index [CRI] is a quantitative measure of the ability of a light source to reveal the colour of various objects faithfully in comparison with an ideal or natural light source.

Light sources with a high CRI are desirable in colour-critical applications such as neonatal care, photography and cinematography.

## CRI 95+

The CRI higher, CRI>95 and the colour is more natural, presenting the true colour for you.

## About IP Rating

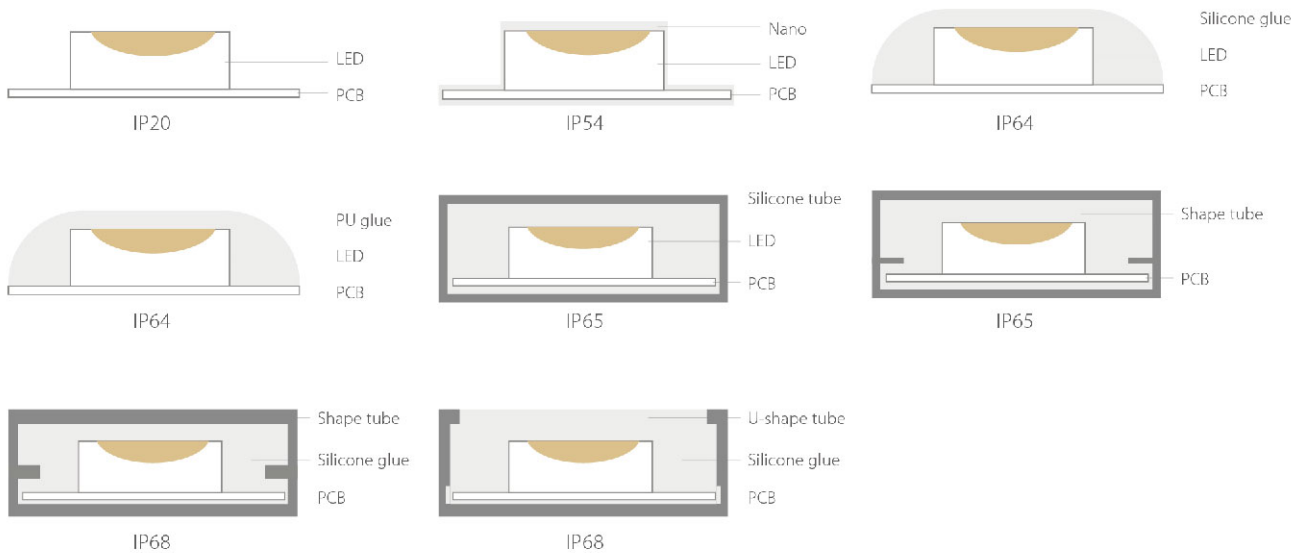





***LED Striplight Set***



# Smart LED Strip Set



- Multiple modes can be freely selected to achieve various smart modes.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/RGB  
**IP Rate:** IP20 IP44 IP64 IP65 IP68


**PCB Width:** 8mm/10mm/12mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h



LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD2835	Smart-LR1121-CCT-X-TZ	24/12	4.8	/	100	2/3/5/10
30LED/M	SMD5050	Smart-LR1311-RGB-X-TZ	24/12	7.2	/	100	2/3/5/10
60LED/M	SMD5050+2835	Smart-LR1311-RGB+W-X-TZ	24/12	7.2	/	163	2/3/5/10
90LED/M	SMD5050+2835+2835	Smart-LR1311-RGBCCT-X-TZ	24/12	7.2	/	100	2/3/5/10



Select Touch Remote



CCT

RGB/RGBW

RGBCCT



Included:

1. Strip Lights x1

2. Touch Remote x1

3. Controller x1

4. Power Supply x1



# Smart LED Strip Set With Zigbee



- One tuya zigbee smart set and multiple tuya smart sets can be combined by local area network and achieve unified control.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/RGB  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 8mm/10mm/12mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h



LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD2835	Smart-LR1121-CCT-X-TZ-Zigbee	24/12	4.8	/	100	2/3/5/10
30LED/M	SMD5050	Smart-LR1311-RGB-X-TZ-Zigbee	24/12	7.2	/	100	2/3/5/10
60LED/M	SMD5050+2835	Smart-LR1311-RGB+W-X-TZ-Zigbee	24/12	7.2	/	163	2/3/5/10
90LED/M	SMD5050+2835+2835	Smart-LR1311-RGBCCT-X-TZ-Zigbee	24/12	7.2	/	100	2/3/5/10



Included:



1. Strip Lights x1



2. Controller x1



3. Power Supply x1





# Smart LED Strip Set With Sensor —

- The sensor and the TUYA are perfectly combined to realize the lighting control, sensing and intelligence all integrated into the strip light set which help to reduce the cost and diversified functions.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/RGB  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 8mm/10mm/12mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h



LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD2835	Smart-LR1121-CCT-X-TZ-Sensor	24/12	4.8	/	100	2/3/5/10
30LED/M	SMD5050	Smart-LR1311-RGB-X-TZ-Sensor	24/12	7.2	/	100	2/3/5/10
60LED/M	SMD5050+2835	Smart-LR1311-RGB+W-X-TZ-Sensor	24/12	7.2	/	163	2/3/5/10
90LED/M	SMD5050+2835+2835	Smart-LR1311-RGBCCT-X-TZ-Sensor	24/12	7.2	/	100	2/3/5/10



Included:



1. Strip Lights x1



with sensor  
 2. Controller x1



3. Power Supply x1



# Smart LED Strip Set (Music)



- Smart music series, realize the rhythm of music through the microphone of TUYA Smart APP.
- Certifications CE/RoHS/ERP/EMC



**Colour:** RGB  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h



LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	Smart-LR1311-RGB-M	24/12	7.2	/	100	2/3/5/10



Included:



1. Strip Lights x1



RGB


2. Touch Remote x1



3. Controller x1



4. Power Supply x1

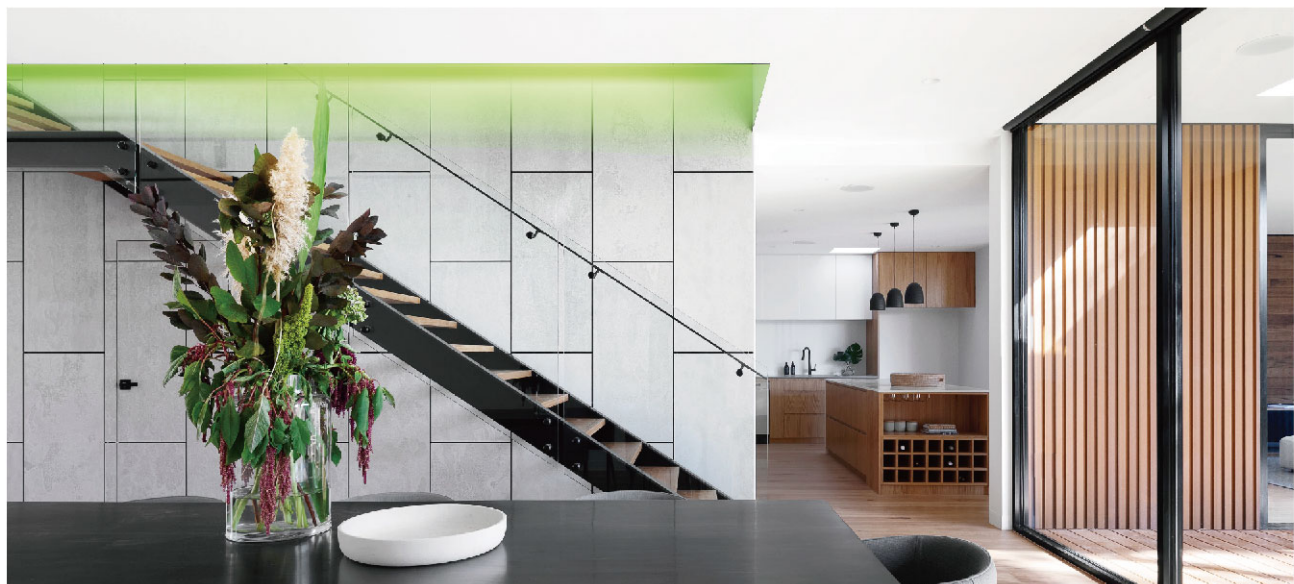



# Smart LED Strip Set (IC)



- Smart Music Digital Set, more than 100 music rhythm modes, customers can customize the modes according to actual needs.
- IC chip segmented control which will bring the more powerful effect, APP and remote control can be used together.
- Certifications CE/RoHS/ERP/EMC



**Colour:** RGB  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h



LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	Smart-LR1311-RGB-IC	24/12	7.2	/	100	2/3/5/10



Included:



1. Strip Lights x1



RGB

2. Touch Remote x1



3. Controller x1



4. Power Supply x1



# Non-Smart LED Strip Set (IC) — CE ErP

- Conventional music digital set with customizable music mode and remote control.
- Certifications CE/RoHS/ERP/EMC



**Colour:** RGB  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	LR1311-RGB-IC	24/12	7.2	/	100	2/3/5/10



Included:



1. Strip Lights x1



RGB

2. Touch Remote x1



3. Controller x1



4. Power Supply x1





# Non-Smart LED Strip Set



- With competitive prices, small white box and integrated controller can be chosen.
- Certifications CE/RoHS/ERP/EMC




**Colour:** NW/WW/CW/R/G/B/RGB  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 8mm/10mm/12mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD2835	LR1121-TZ	24/12	4.8	/	100	2/3/5/10
60LED/M	SMD2835	LR1121-CCT-X-TZ	24/12	4.8	/	100	2/3/5/10/20
30LED/M	SMD5050	LR1311-RGB-X-TZ	24/12	7.2	/	100	2/3/5/10
60LED/M	SMD5050+2835	LR1311-RGB+W-X-TZ	24/12	7.2	/	163	2/3/5/10
90LED/M	SMD5050+2835+2835	LR1311-RGBCCT-X-TZ	24/12	7.2	/	100	2/3/5/10



Select Touch Remote



CCT RGB/RGBW RGBCCT

Select IR Controller



Included:

1. Strip Lights x1

2. Touch Remote x1

3. Controller x1

4. Power Supply x1







***Low voltage striplight***



# COB LED Strip



- COB LED strip lights series, has the advantages of novel style, high light efficiency, good heat dissipation and long life.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 4mm/6mm/8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

## FCOB LED Strip Set, Single Colour

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
352LED/M	1021	LRCOB-352-6-TZ	24	6-8	500-700	45	3/5
352LED/M	1021	LRCOB-352-8-TZ	24	10-12	800-1200	45	3/5
512LED/M	1021	LRCOB-512-8-TZ	24	6-8	600-800	30	3/5

## FCOB LED Strip Set, CCT

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
544LED/M	1021	LRCOB-544-CCT-TZ	24	8	700-800	30	3/5



# SMD2835 LED Strip



- Best-selling light strip --- SMD light strip products which can be made in various colour has the advantages of good light output, good heat dissipation, long life time.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 4mm/6mm/8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD2835	LR1111	12/24	2.4	300	50	2/3/5/10
60LED/M	SMD2835	LR1121	12/24	4.8	600	50	2/3/5/10
120LED/M	SMD2835	LR1131	12/24	9.6	1200	25	2/3/5/10
240LED/M	SMD2835	LR1141	12/24	19.2	2400	25	2/3/5/10





# SMD4040 LED Strip




- Best-selling light strip --- SMD light strip products which can be made in various colour has the advantages of good light output, good heat dissipation, long life time.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 4mm/6mm/8mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD4040	LR1921	12/24	4.8	400	50	2/3/5/10

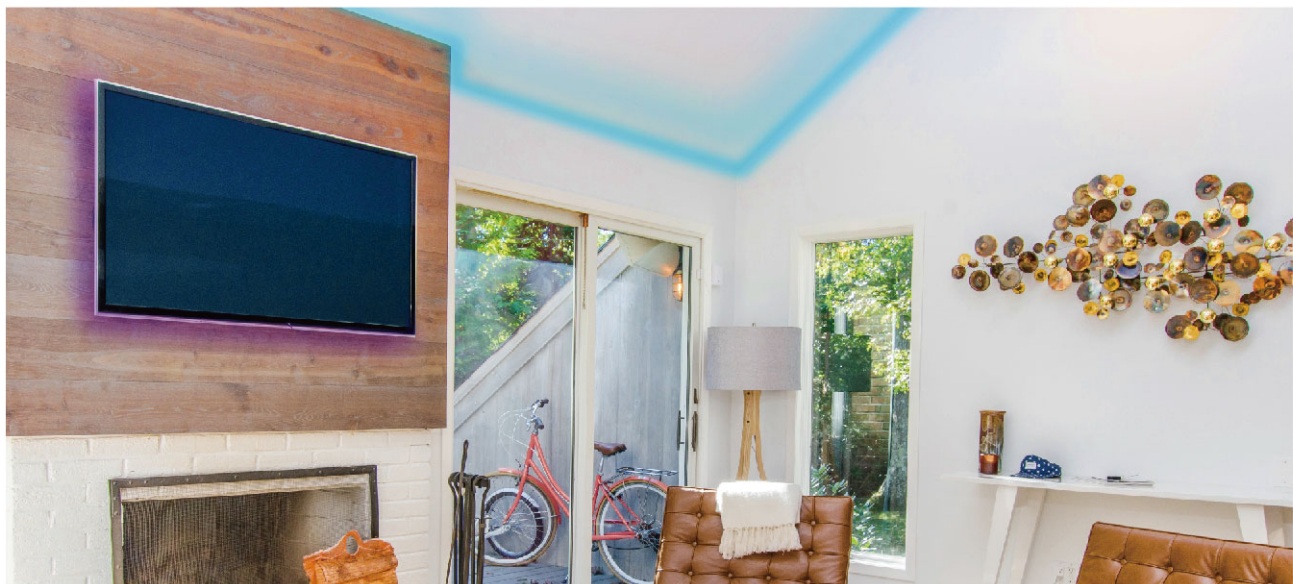

# SMD5050 LED Strip



ErP



- Best-selling light strip --- SMD light strip products which can be made in various colour has the advantages of good light output, good heat dissipation, long life time.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 4mm/6mm/8mm/15mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	LR1311	12/24	7.2	860	100	2/3/5/10
60LED/M	SMD5050	LR1321	12/24	14.4	1300	50	2/3/5/10
120LED/M	SMD5050	LR1331	12/24	28.8	2300	50	2/3/5/10





# SMD5730 LED Strip



- Best-selling light strip --- SMD light strip products which can be made in various colour has the advantages of good light output, good heat dissipation, long life time.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 4mm/6mm/8mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD5730	LR1421	12	10	1300	50	2/3/5/10
120LED/M	SMD5730	LR1431	24	20	2600	50	2/3/5/10



# 150lm/w High Light Efficiency




- High lumen efficiency, low energy consumption, good heat dissipation, long life time.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 4mm/6mm/8mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
72LED/M	SMD2835	LR1133-72	12/24	10	1500	420	2/3/5/10

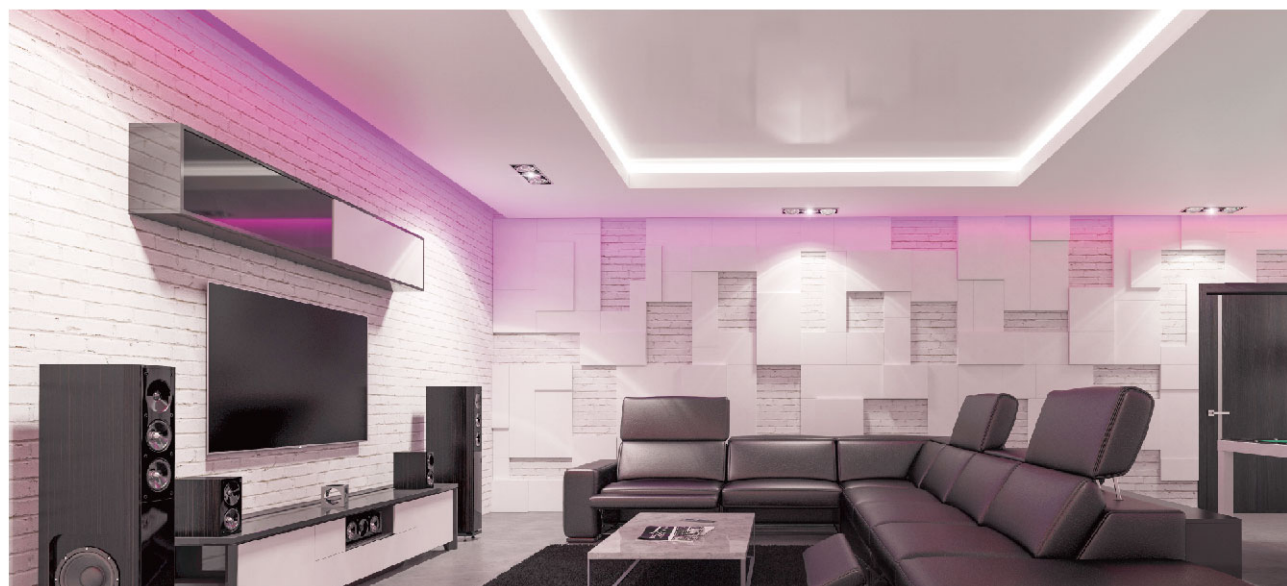



# CCT 2 IN 1



- Two-in-one strip light, with softer light effect comparing with standard strip light.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 10mm/12mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	LR1313	12/24	7.2	540	100	2/3/5/10
60LED/M	SMD5050	LR1321	12/24	7.2	540	100	2/3/5/10



# RGB 3 IN 1



- RGB three-in-one strip light, lower cost and more colour combinations.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	LR1311-RGB	12/24	7.2	/	100	2/3/5/10
60LED/M	SMD5050	LR1321-RGB	12/24	14.4	/	50	2/3/5/10





# RGBW 4 IN 1



- RGB four-in-one strip light, lower cost and more colour combinations.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 10mm/12mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h


LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	LR1313-RGBW	12	7.2	/	100	2/3/5/10
60LED/M	SMD5050	LR1323-RGBW	12/24	14.4	/	50	2/3/5/10
30LED/M	SMD5050	LR1333-RGBW	12/24	14.4	/	50	2/3/5/10
30(SMD2835) +30(RGB)LED/M	SMD5050+2835	LR1343-RGBW	12/24	9.6	/	50	2/3/5/10



# RGBWW 5 IN 1



- RGB five-in-one strip light, lower cost and more colour combinations.
- Certifications CE/RoHS/ERP/EMC

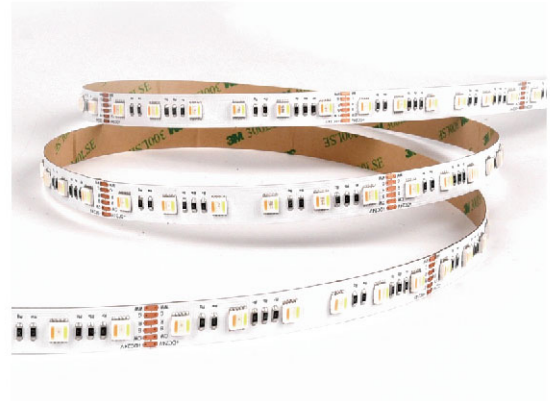

**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 10mm/12mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	LR1811	12	7.2	540	50	2/3/5/10
60LED/M	SMD5050	LR1821	12/24	14.4	1080	50	2/3/5/10
84LED/M	SMD5050	LR1831	12/24	20	1500	25	2/3/5/10
120LED/M	SMD5050	LR1841	12/24	28.8	2160	25	2/3/5/10





# RA 95/98 High Explicit



- High CRI, a high degree of authenticity.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 10mm/12mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >95/98  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD2835	LR1113-H	12/24	2.4	300	100	2/3/5/10
60LED/M	SMD2835	LR1123-H	12/24	4.8	600	50	2/3/5/10
30LED/M	SMD5050	LR1311-H	12/24	7.2	860	100	2/3/5/10
60LED/M	SMD5050	LR1321-H	12/24	14.4	1300	50	2/3/5/10







***High Voltage Striplight***



# SMD2835 High Voltage LED strip



- 2835 High-Voltage strip light, low price leads to better sales.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD2835	LR2121	110-220V/220-230V	6	480	25	2/3/5/10
120LED/M	SMD2835	LR2131	110-220V/220-230V	8	540	100	2/3/5/10



# SMD5050 High Voltage LED strip



- 5050 High-Voltage strip light, high lumen efficiency, good heat dissipation.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD5050	LR2321	110-220V/220-230V	7.2	860	100	2/3/5/10
60LED/M	SMD5050	LR2323	110-220V/220-230V	10	1100	100	2/3/5/10
60LED/M	SMD5050	LR2321-RGB	110-220V/220-230V	8	/	100	2/3/5/10





# No conductor High Voltage LED strip




- No conductor High-voltage strip light has beautiful appearance and good light output.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h



LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD5730	LR1423	12	10	1300	50	2/3/5/10
120LED/M	SMD5730	LR1433	24	20	2600	25	2/3/5/10







***LED Neon striplight***



# Unilateral Light Neon Rope



- Single-sided light can be made in various colour.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP65 IP67 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h




LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
120LED/M	SMD2835	LR2131-S	110-220/220-230	8	/	1000	2/3/5/10



# Bilateral Light Neon Rope




- Double-sided light which can be made in various colour.
- Certifications CE/RoHS/ERP/EMC

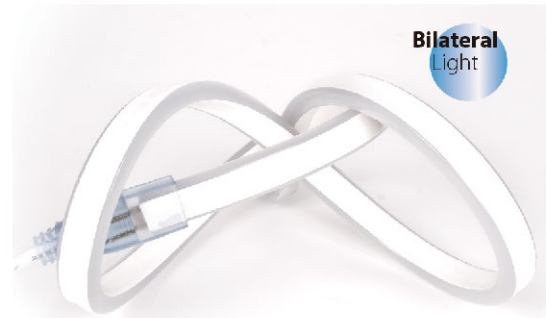

**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP65 IP67 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

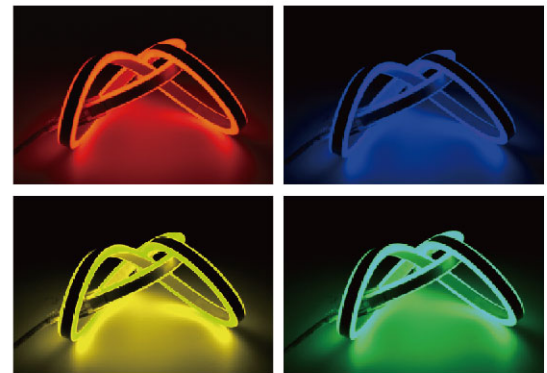

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
120LED/M	SMD2835	LR2131-D	110-220/220-230	8	/	1000	2/3/5/10






# RGB Light Neon Rope





- Single-sided RGB neon strip, customers can adjust the colour according to actual demand.
- Certifications CE/RoHS/ERP/EMC

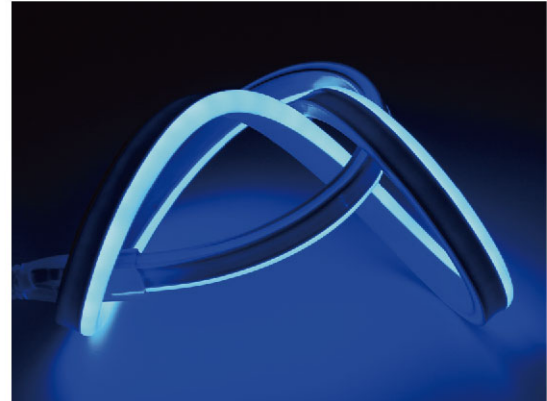

**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP65 IP67 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

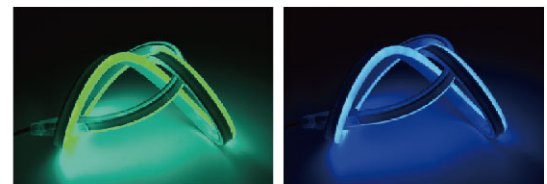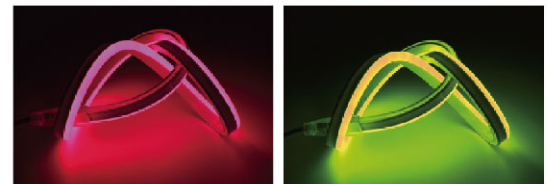


LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
60LED/M	SMD5050	LR2321-RGB-S	110-220/220-230	10	/	1000	2/3/5/10
60LED/M	SMD5050	LR2321-RGB-D	110-220/220-230	10	/	1000	2/3/5/10



# 360° Light Neon Rope



- 360° neon strip light with various colour and a wide range of applications.
- Certifications CE/RoHS/ERP/EMC

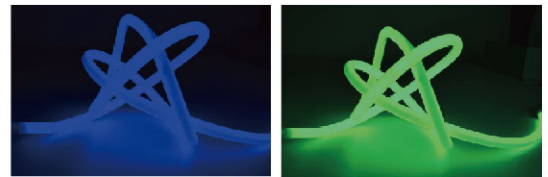

**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP65 IP67 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
120LED/M	SMD2835	LR2131-360	110-220/220-230	8	/	1000	2/3/5/10





# 360° RGB Light Neon Rope




- 360° RGB neon light strip, a variety of colour for customers to choose.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP65 IP67 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

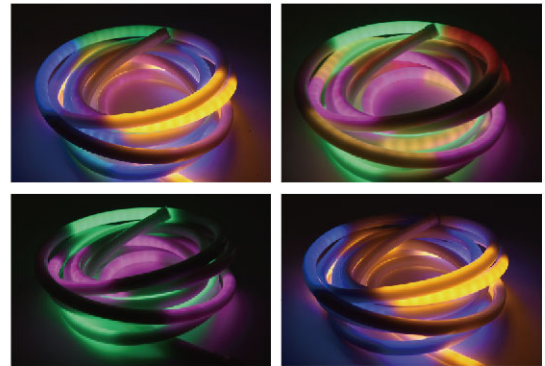

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
120LED/M	SMD2835	LR2131-360RGB	110-220/220-230	8	/	1000	2/3/5/10



# 360° RGB(IC) Light Neon Rope




- 360° RGB Neon strip light, 100 different modes and also support customizaion by customers' needs.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP65 IP67 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

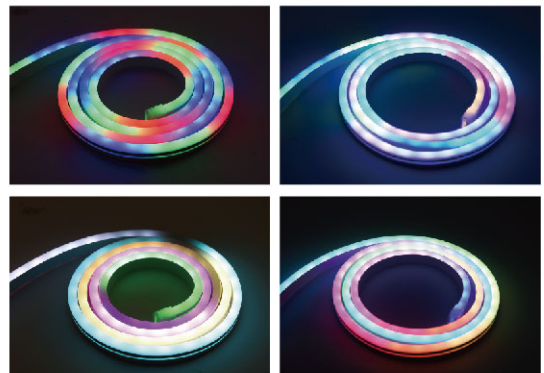

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
48LED/M	SMD5050	LR2321-IC	12/24	6	/	1000	2/3/5/10








***Functional LED Striplight Set***

# Smart Desktop Ambiance Lamp NEW

CE  ErP

- Light control is getting easier: two ways to change the color and modes.
- Double enjoyment of hearing and vision: the light can change color with music.
- Multiple size available: meeting the needs of different uses.
- Certifications CE/RoHS/ERP2.0

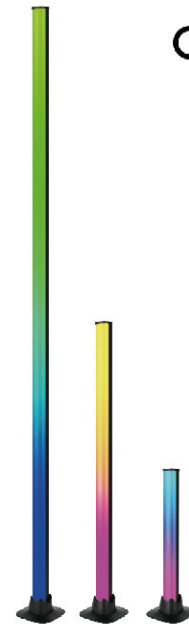

**Colour:** R/G/B  
**Beam angle:** 180°

**Body material:** ABS+PC/ AL+PC  
**Area of Illumination:** 300\* 30\* 30mm/ 550\* 30\* 30mm/ 1200\* 30 \*30mm  
**Specification:** 220-240V  
**PF:** 0.5  
**Individual packing:** color box

LED Qty	LED Driver Output	Item No.	Packing details	Wattage	Material
30PCS	5V 1A	LR4311-RGB-TB-5V-BL-300mm	1m USB cable without adapter	2.5W*2	ABS+PC
30PCS	5V 1A	LR4311-RGB-TB-5V-BL-300mm	1m USB cable without adapter	2.5W*2	AL+PC
50PCS	5V 2A	LR4311-RGB-TB-5V-BL-550mm	1m USB cable without adapter	4W*2	AL+PC
72PCS	12V 3A	LR4311-RGB-TB-12V-Wifi-1200mm	1m USB cable+adapter	10W	AL+PC



Included:



1. Corner Lamp x1

Corner Lamp x2



2. USB cable





# Smart Desktop Ambiance Lamp NEW

CE  ErP

- Light control is getting easier: remote control & mobile phone.
- Double enjoyment of hearing and vision: the light can change color with music.
- Certifications CE/RoHS/ERP2.0



**Colour:** R/G/B/W  
**Beam angle:** 360°

**Body material:** PC  
**Area of Illumination:** 310\* 65\* 65mm  
**Specification:** 220-240V  
**PF:** 0.5  
**Individual packing:** color box

LED Qty	LED Driver Output	Item No.	Packing details	Wattage	Material
17PCS	5V 1A	LR4371-RGBIC-TB-5V	1m USB cable+ 40 keys IR controller	2.5W*2	PC
17PCS	5V 1A	LR4371-RGBWIC-TB-5V	1m USB cable+ 40 keys IR controller	2.5W*2	PC



Included:



1. Corner Lamp x1



2. Touch Remote x1




3. USB cable x1



# Smart Corner Lamp LED Strip Set



- A variety of modes are available, whatever the multiple colour modes or single colour mode, can easily create a dancing atmosphere.
- You can have parties at home without going to bars, KTVs and other places.
- Certifications CE/RoHS/ERP/EMC

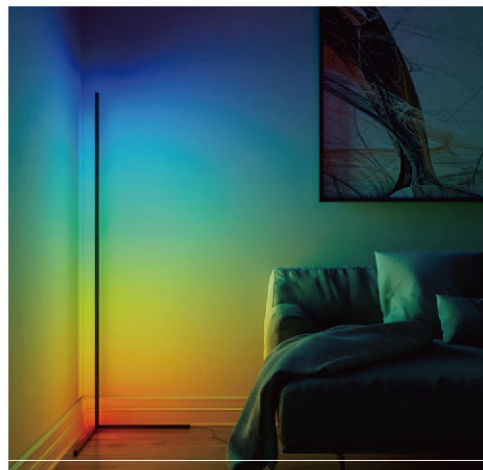

**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP20

**Body material:** aluminum  
**Area of Illumination:** 6-15m<sup>2</sup>  
**Specification:** L 14\*W 4mm  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage (V)	Packing details	Lamp Color
120LED/M	SMD2835	Smart-LR1131-C	12	304 on-off switch + Power adapter	Black/white
120LED/M	SMD2835	Smart-LR1131-CCT-C	12	14 keys IR controller + Power adapter	Black/white
60LED/M	SMD5050	Smart-LR1321-RGB-C	12	24 keys IR controller+ Power adapter	Black/white
60LED/M	SMD5050	Smart-LR1321-RGB-IC-C	12	40 keys IR controller (Voice control) + Power adapter	Black/white
60LED/M+60LED/M	SMD2835+5050	Smart-LR1311-RGBW-IC-C	12	40 keys IR controller (Voice control) + Power adapter	Black/white



Included:



1. Corner Lamp x1




2. Touch Remote x1



3. Controller x1



4. Power Supply x1

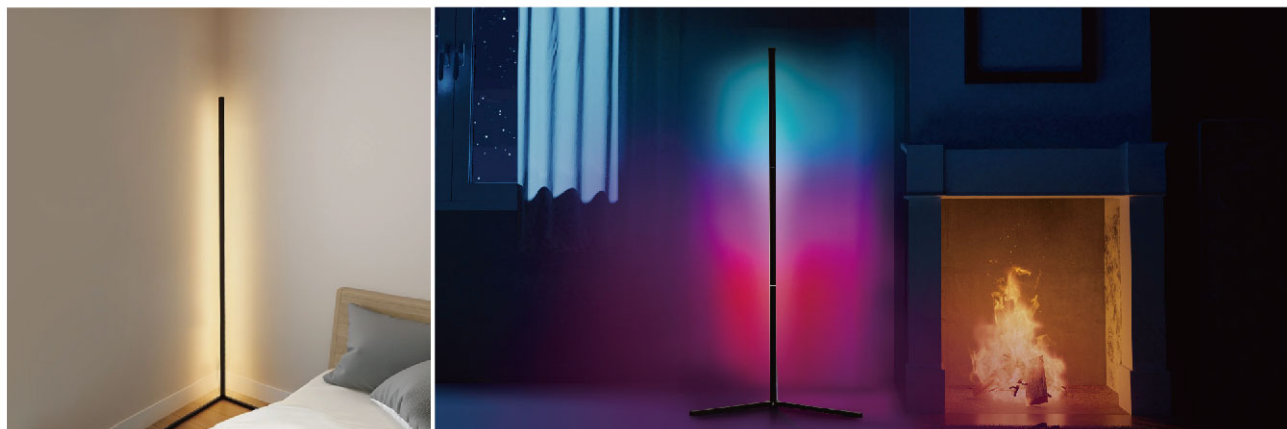



# Corner Lamp LED Strip Set



- A variety of modes are available, whatever the multiple colour modes or single colour mode, can easily create a dancing atmosphere.
- You can have parties at home without going to bars, KTVs and other places.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP20

**Body material:** aluminum  
**Area of Illumination:** 6-15m<sup>2</sup>  
**Specification:** L 14\*W 4mm  
**Power supply:** 100-240V  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Packing details	Lamp Color
120LED/M	SMD2835	LR1131-C	12	304 on-off switch + Power adapter	Black/white
120LED/M	SMD2835	LR1131-CCT-C	12	14 keys IR controller + Power adapter	Black/white
60LED/M	SMD5050	LR1321-RGB-C	12	24 keys IR controller+ Power adapter	Black/white
60LED/M	SMD5050	LR1321-RGB-IC-C	12	22 keys IR controller (Voice control) + Power adapter	Black/white
60LED/M+60LED/M	SMD2835+5050	LR1311-RGBW-IC-C	12	24 keys IR controller (Voice control) + Power adapter	Black/white



Included:



1. Corner Lamp x1

Select Touch Remote



CCT



RGB-IC



RGB



RGBW-IC

2. Touch Remote x1



3. Power Supply x1



# TV Backlight LED Strip Set



- Easy Installation & Sticky Tape: Installing strip lights is extremely easy.
- Plug and Play, you do not need spend extra time and money buying other accessories.
- Certifications CE/RoHS/ERP/EMC



LED Qty	LED Type	Wattage [W]	PCB Width	Color
2x15LED/0.5M	SMD5050	3.6W/M	10mm	RGB



LED Qty	LED Type	Wattage [W]	PCB Width	Color
4x15LED/0.5M	SMD5050	3.6W/M	10mm	RGB



LED Qty	LED Type	Wattage [W]	PCB Width	Color
30LED/M	SMD5050	3.6W/M	10mm	RGB





# Cabinet LED Strip With Sensor



- Plug and Play Light Kit! Adhesive 3M Tape Backing for Secure and Easy Installation.
- With PIR Motion Sensor Mode: Automatic turn on and shut off.
- Certifications CE/RoHS/ERP/EMC



LED Qty	LED Type	Item No.	Voltage [V]
30 PCS	SMD2835	LR003	5V



1. Please cut LED strip light through the lines marked on it according to installation requirement



2. Connect the strip and sensor with batteries as shown above Extra connector can also be used if connector wire in not long enough

3. Tear off the 3M adhesive tape from the Magnetic and strip

4. Install the LED strip and sensor to the fixed position, the sensor toward to the body induction area.



LED Qty	LED Type	Item No.	Voltage [V]
30 PCS	SMD2835	LR004	5V



1. Please cut LED strip light through the lines marked on it according to installation requirement

2. Connect the strip and sensor with batteries as shown above Extra connector can also be used if connector wire in not long enough

3. Tear off the 3M adhesive tape from the Magnetic and strip

4. Install the LED strip and sensor to the fixed position, the sensor toward to the body induction area.

# Bed Light With Sensor And Remote



- Soft glow of light will turn on to guide you safely across the room in the dark, no disturbing glare to wake others up and no fumbling to find the light switch in the darkness when getting out of bed.
- Certifications CE/RoHS/ERP/EMC



**Colour:** NW/WW/CW/R/G/B/Y  
**IP Rate:** IP20 IP44 IP64 IP65 IP68

**PCB Width:** 8mm/10mm  
**Beam angle:** 120°  
**Colour Rendering:** CRI >80  
**Power supply:** AC 100-240V 50/60Hz  
**Operating temperature:** -20°C ~ +40°C  
**Expected lifetime:** 15000 h

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	LR1131-RGB-Sensor	24/12	7.2	/	1000	2/3/5/10



Included:



1. Strip Lights x1



RGB

2. Touch Remote x1



3. Controller x1



4. Power Supply x1








# Bed Light LED Strip With Sensor



- The human body enters 6.6ft~16.4ft (140 degrees of induction) automatically lights up; will turn off after the people has left the area for 15~20 seconds.
- Certifications CE/RoHS/ERP/EMC

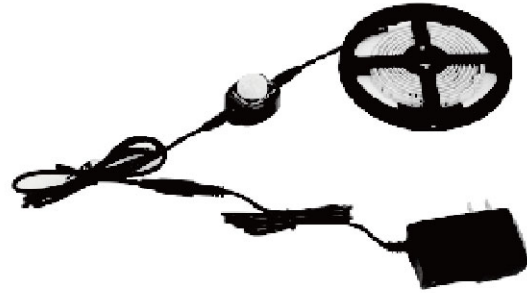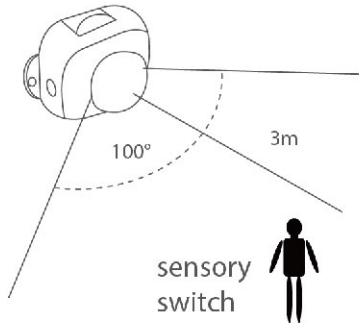

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
30LED/M	SMD5050	LR1131-Sensor	24/12	2.4	/	1000	2/3/5/10
30LED/M	SMD5050	LR1131-2x(2/3/5)-Sensor	24/12	2.4	/	1000	2/3/5/10

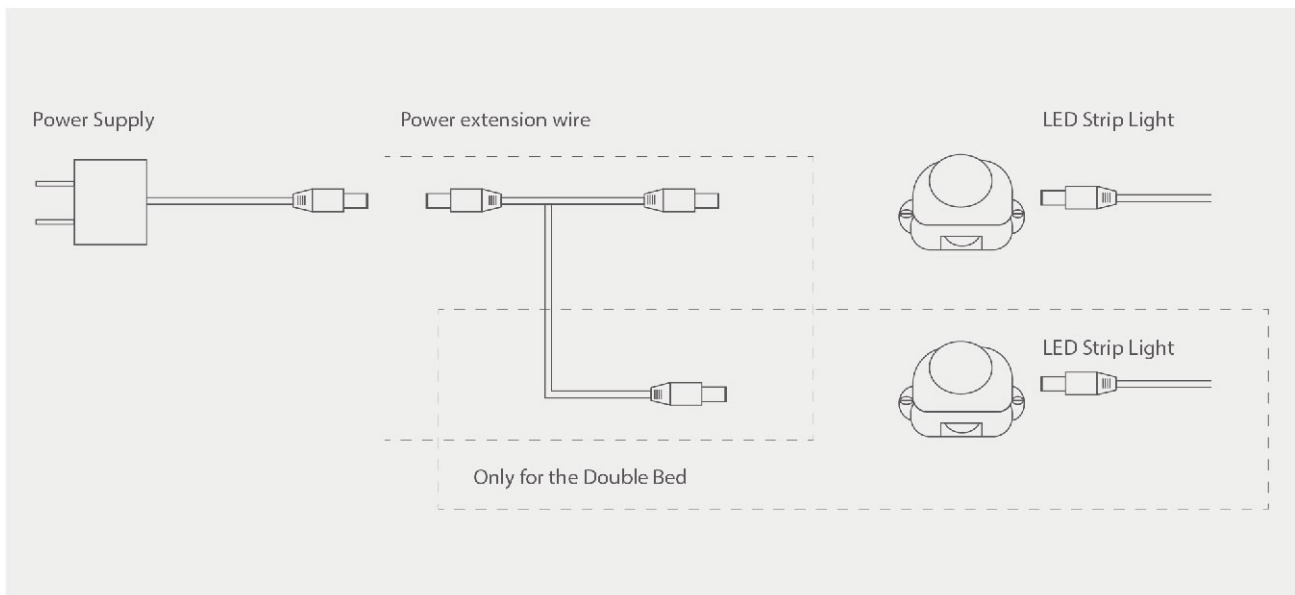


# DIY Neon Light LED Strip Set



ErP



- DIY Neon Art Decorative Kids Gifts for Developmental Toys, Bedroom, Living Room, Christmas.
- The 2835 LED strip can easily give out strong light in the night time.
- Certifications CE/RoHS/ERP/EMC



Included:



1. Strip Lights x1



2. Power Supply x1



Included:



1. Base x1




2. Strip Lights x1



3. Power Supply x1

LED Qty	LED Type	Item No.	Voltage [V]	Wattage [W]	Lumen [lm/m]	Cut [mm]	Roll [m]
120LED/M	SMD2835	LR1131-DIY1	5	4,5	/	/	2/3/5/10
120LED/M	SMD2835	LR1131-DIY2	5	4,5	/	/	2/3/5/10


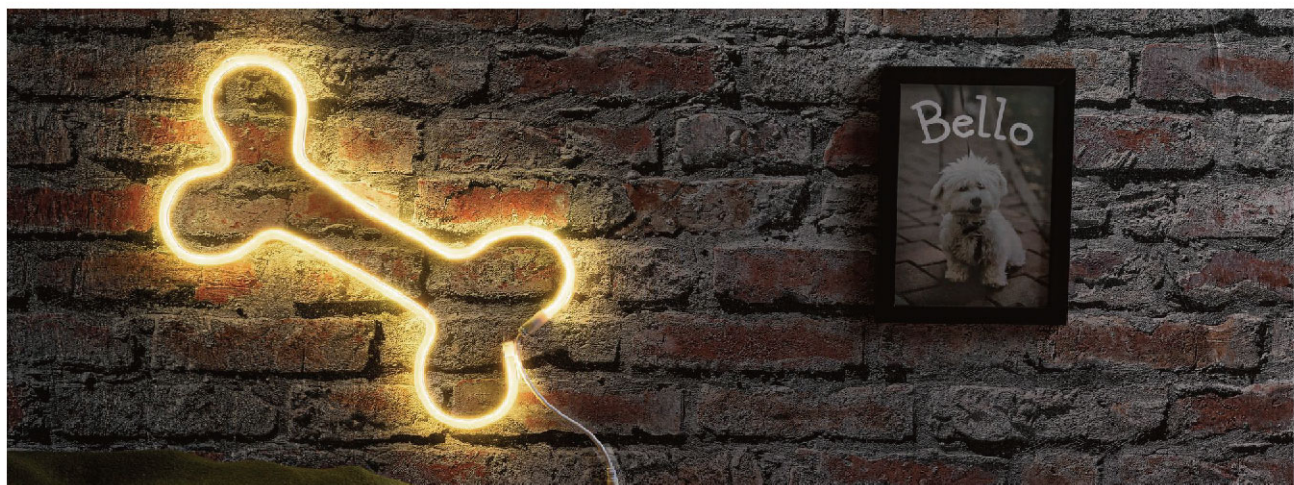




# Car Lights LED Strip Set




- No need to modify the wiring, simply peel off the double-sided tape behind each strip and apply them under the seats or in the footwell area.
- A built-in switch on the cigarette lighter socket, easy to turn it on/off, no need plug and pull frequently.
- Certifications CE/RoHS/ERP/EMC

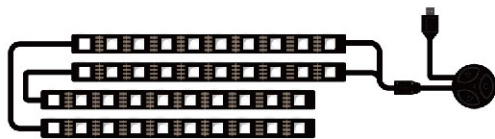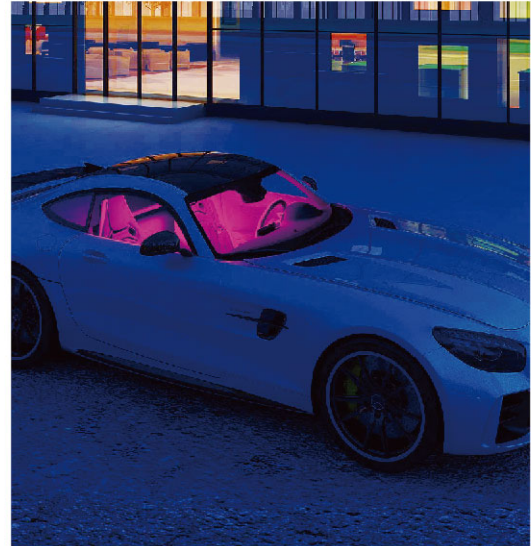


LR1311  
4\*18LEDS-USB-CM

4x LED strip light , 1x Remote control(Without Battery)  
1x Music IR Control Box , 1x USB Port Wire

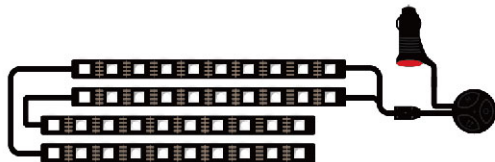

LR1311  
4\*18LEDS-car charger-CM

4x LED strip light , 1x Remote control(Without Battery)  
1x Music IR Control Box , 1x Cigarette lighter Port Cable

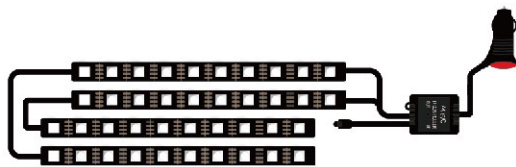

LR1311  
4\*12LEDS-car charger

4x LED strip light , 1x Remote control(Without Battery)  
1x Music IR Control Box , 1x Cigarette lighter Port Cable



LR1311  
4\*12LEDS-car charger-RM

4x LED strip light , 1x Remote control(Without Battery)  
1x Music IR Control Box , 1x Cigarette lighter Port Cable




***LED Striplight & Accessories***



# Transparent Connectors Series

**Beam angle:** 24-22AWG/ $\Phi$ 15- $\Phi$ 1.6  
**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C


Item No.	Suitable for silicon cover strip light IP20 Strip light, single layer, double layer
MA5P-10	8mm-2P connector with cable
MA2P-12	8mm-3P connector with cable
MA5P-12	8mm-4P connector with cable
MA6P-12	10mm-2P connector with cable
RA2P-8	10mm-3P connector with cable
RA2P-10	10mm-4P connector with cable
MA5P-10	10mm-5P connector with cable
MA2P-12	12mm-2P connector with cable
MA5P-12	12mm-5P connector with cable
MA6P-12	12mm-6P connector with cable
RA2P-8	8mm COB light strip connector with cable
RA2P-10	10mm COB light strip connector with cable

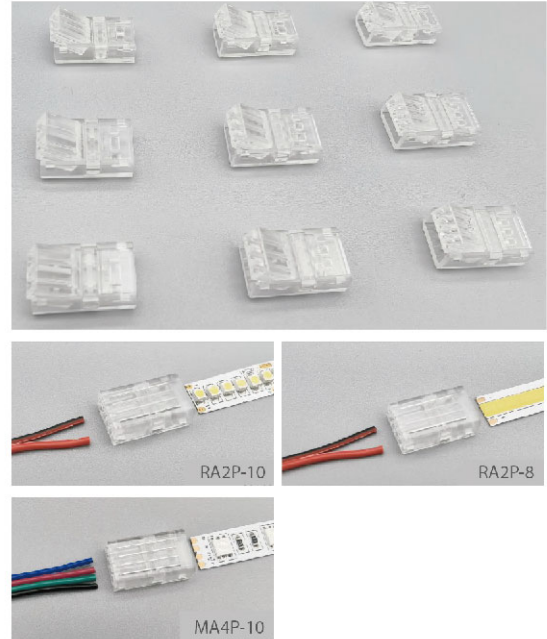

# Transparent Single-connector For Wiring Series

**Beam angle:** 24-22AWG/ $\Phi$ 15- $\Phi$ 1.6  
**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C


Item No.	Suitable for silicon cover strip light IP20 Strip light, single layer, double layer
MA2P-8-1	8mm-2P single connector with cable
MA3P-8-1	8mm-3P single connector with cable
MA4P-8-1	8mm-4P single connector with cable
MA2P-10-1	10mm-2P single connector with cable
MA3P-10-1	10mm-3P single connector with cable
MA4P-10-1	10mm-4P single connector with cable
MA5P-10-1	10mm-5P single connector with cable
MA2P-12-1	12mm-2P single connector with cable
MA5P-12-1	12mm-5P single connector with cable
MA6P-12-1	12mm-6P single connector with cable
RA2P-8-1- COB strip light	Single connector with cable
RA2P-10-1- COB strip light	Single connector with cable

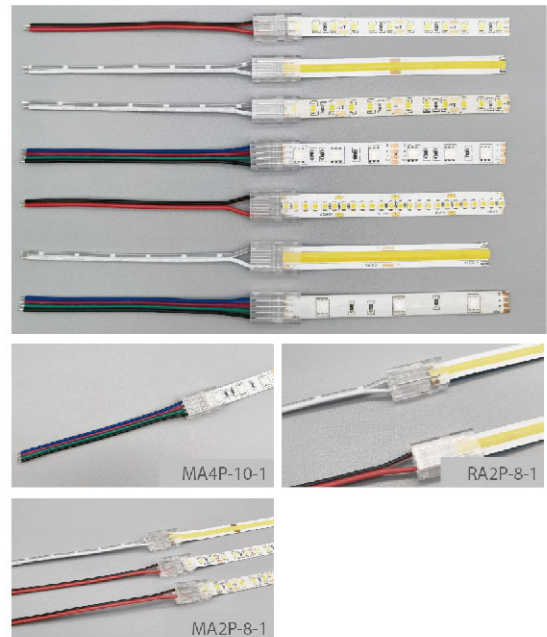

## Transparent Double Connector With Cable

**Beam angle:** 24-22AWG/ $\Phi$ 15- $\Phi$ 1.6  
**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C


Item No.	Suitable for silicon cover strip light IP20 Strip light, single layer, double layer
MA2P-8-2	8mm-2P double connector with cable
MA3P-8-2	8mm-3P double connector with cable
MA4P-8-2	8mm-4P double connector with cable
MA2P-10-2	10mm-2P double connector with cable
MA3P-10-2	10mm-3P double connector with cable
MA4P-10-2	10mm-4P double connector with cable
MA5P-10-2	10mm-5P double connector with cable
MA2P-12-2	12mm-2P double connector with cable
MA5P-12-2	12mm-5P double connector with cable
MA6P-12-2	12mm-6P double connector with cable
RA2P-8-2	8mm COB light strip connector with cable
RA2P-10-2	10mm COB light strip connector with cable

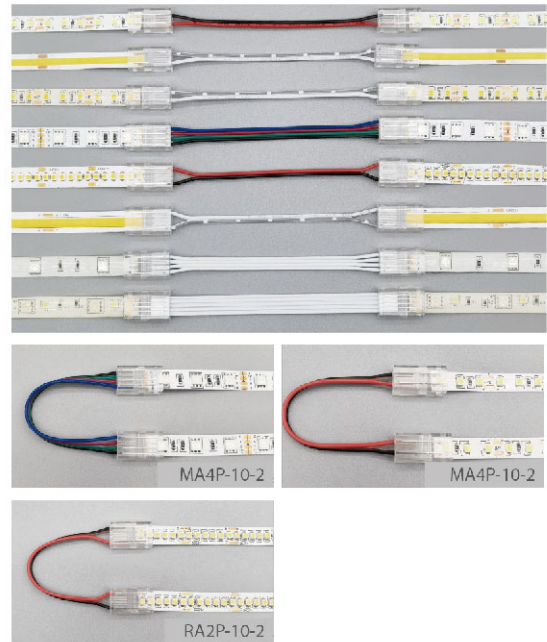

## Transparent Dc Connector Series

**Beam angle:** 24-22AWG/ $\Phi$ 15- $\Phi$ 1.6  
**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C

Item No.	Suitable for silicon cover strip light IP20 Strip light, single layer, double layer
MA2P-8-DC	8mm-2P DC connector
MA3P-8-MK	8mm-3P terminal connector
MA4P-8-MK	8mm-4P 4 female connector
MA2P-10-DC	10mm-2P DC connector
MA3P-10-MK	10mm-3P terminal connector
MA4P-10-MK	10mm-4P 4 female connector
MA5P-10-MK	10mm-5P terminal connector
MA2P-12-DC	12mm-2P DC connector
MA5P-12-MK	12mm-5P terminal connector
MA6P-12-MK	12mm-6P terminal connector
RA2P-8-DC	8mm DC connector for COB light strip
RA2P-10-DC	10mm DC connector for COB light strip


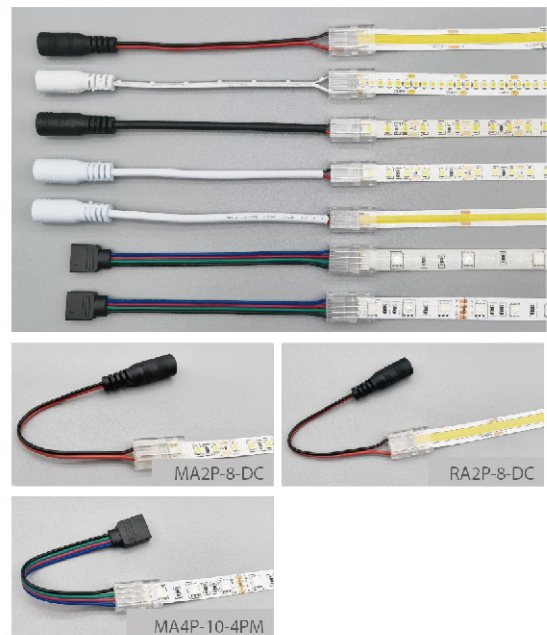




# Transparent Transfer Connector In L Shape Series

**Beam angle:** 24-22AWG/Φ15-Φ1.6  
**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C

Item No.	Suitable for silicon cover strip light IP20 Strip light, single layer, double layer
MA2P-8-L	8mm-2P transfer connector L shape
MA3P-8-L	8mm-3P transfer connector L shape
MA4P-8-L	8mm-4P transfer connector L shape
MA2P-10-L	10mm-2P transfer connector L shape
MA3P-10-L	10mm-3P transfer connector L shape
MA4P-10-L	10mm-4P transfer connector L shape
MA5P-10-L	10mm-5P transfer connector L shape
MA2P-12-L	12mm-2P transfer connector L shape
MA5P-12-L	12mm-5P transfer connector L shape
MA6P-12-L	12mm-6P transfer connector L shape
RA2P-8-L-COB strip light	8mm L shape transfer connector
RA2P-10-L-COB strip light	8mm L shape transfer connector

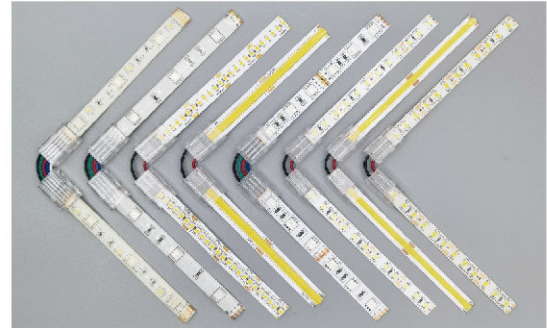


# Transparent Transfer Connector With Cable

straight, inner and outer, 90°, R shape series

**Beam angle:** 24-22AWG/Φ15-Φ1.6  
**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C


Item No.	with wire transfer straight inner and outer right angle R type
MA2P-8-R	8mm-2P
MA3P-8-R	8mm-3P
MA4P-8-R	8mm-4P
MA2P-10-R	10mm-2P
MA3P-10-R	10mm-3P
MA4P-10-R	10mm-4P
MA5P-10-R	10mm-5P
MA2P-12-R	12mm-2P
MA5P-12-R	12mm-5P
MA6P-12-R	12mm-6P
RA2P-8-R-COB strip light	8mm transfer connector in straight
RA2P-10-R-COB strip light	8mm transfer connector in straight

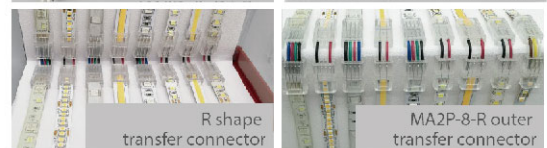

# Transparent Connector Series

**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C


Item No.	Suitable for silicon cover strip light IP20 Strip light, single layer, double layer
MB2P-8	8mm-2P connector
MB3P-8	8mm-3P connector
MB4P-8	8mm-4P connector
MB2P-10	10mm-2P connector
MB3P-10	10mm-3P connector
MB4P-10	10mm-4P connector
MB5P-10	10mm-5P connector
MB2P-12	12mm-2P connector
MB5P-12	12mm-5P connector
MB6P-12	12mm-6P connector
RB2P-8	8mm connector for COB strip light
RB2P-10	10mm connector for COB strip light

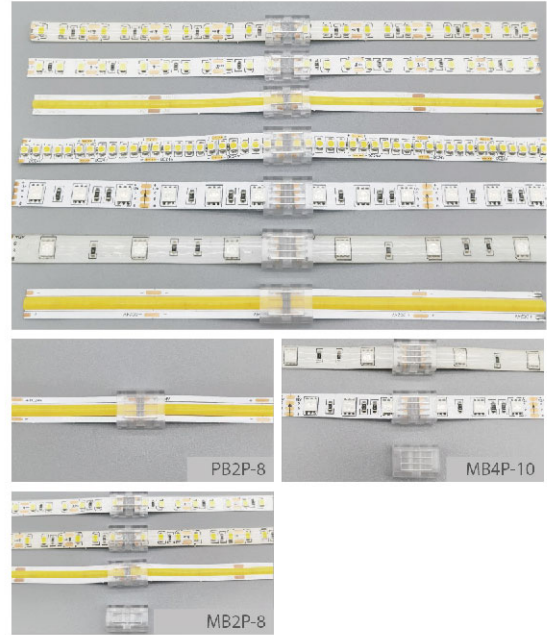

# Transparent Transfer Connector Series In L Shape

**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C

Item No.	with wire transfer straight inner and outer right angle R type
MB2P-8-L	8mm-2P transfer connector in L shape
MB3P-8-L	8mm-3P transfer connector in L shape
MB4P-8-L	8mm-4P transfer connector in L shape
MB2P-10-L	10mm-2P transfer connector in L shape
MB3P-10-L	10mm-3P transfer connector in L shape
MB4P-10-L	10mm-4P transfer connector in L shape
MB5P-10-L	10mm-5P transfer connector in L shape
MB2P-12-L	12mm-2P transfer connector in L shape
MB5P-12-L	12mm-5P transfer connector in L shape
MB6P-12-L	12mm-6P transfer connector in L shape
RB2P-8-L-COB strip light	8mm L shape connector
RB2P-10-L-COB strip light	8mm L shape connector


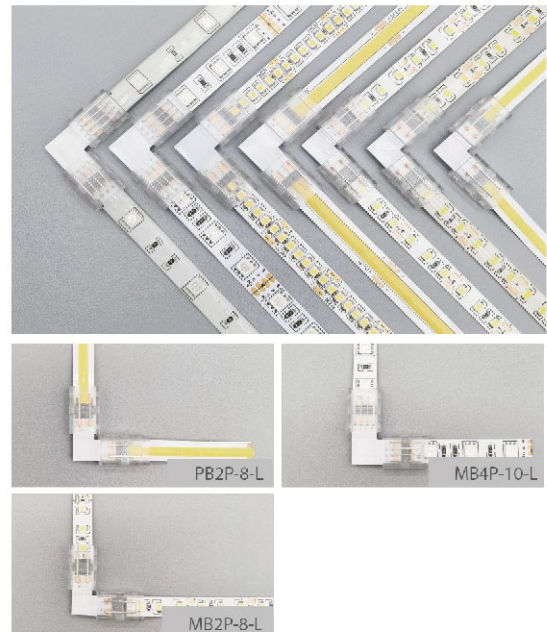




## Transparent Transfer Connector In T Shape

**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C


Item No.	Suitable for silicon cover strip light IP20 Strip light, single layer, double layer
MB2P-8-T	8mm-2P transfer connector in T shape
MB3P-8-T	8mm-3P transfer connector in T shape
MB4P-8-T	8mm-4P transfer connector in T shape
MB2P-10-T	10mm-2P transfer connector in T shape
MB3P-10-T	10mm-3P transfer connector in T shape
MB4P-10-T	10mm-4P transfer connector in T shape
MB5P-10-T	10mm-5P transfer connector in T shape
MB2P-12-T	12mm-2P transfer connector in T shape
MB5P-12-T	12mm-5P transfer connector in T shape
MB6P-12-T	12mm-6P transfer connector in T shape
RB2P-8-T-COB strip light	8mm T shape connector
RB2P-10-T-COB strip light	10mm T shape connector

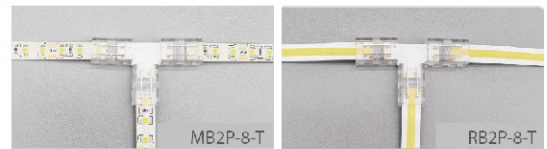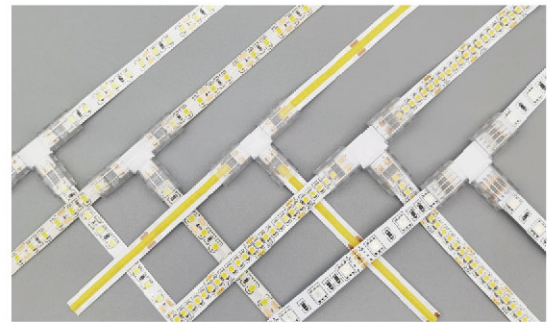

## Transparent Transfer Connector In X Shape

**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C


Item No.	with wire transfer straight inner and outer right angle R type
MB2P-8+	8mm-2P + shape transfer connector
MB3P-8+	8mm-3P + shape transfer connector
MB4P-8+	8mm-4P + shape transfer connector
MB2P-10+	10mm-2P + shape transfer connector
MB3P-10+	10mm-3P + shape transfer connector
MB4P-10+	10mm-4P + shape transfer connector
MB5P-10+	10mm-5P + shape transfer connector
MB2P-12+	12mm-2P + shape transfer connector
MB5P-12+	12mm-5P + shape transfer connector
MB6P-12+	12mm-6P + shape transfer connector
RB2P-8+-COB strip light	8mm X shape connector
RB2P-10+-COB strip light	10mm T shape connector

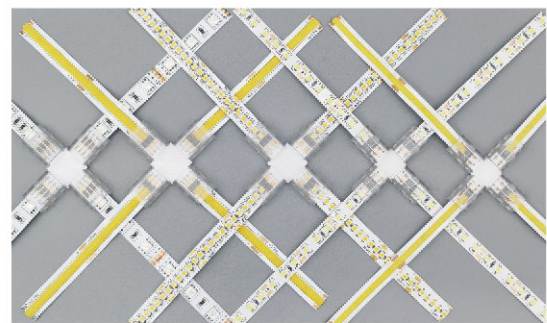

# Transparent Clips Series For Strip Light

**Power supply:** DC36V/5A  
**Operating temperature:** -20°C-45°C

Item No.	Suitable for silicon cover strip light IP20 Strip light, single layer, double layer
NKL-8	Fixing clips for 8mm width IP20 Strip light
NKL-10	Fixing clips for 10mm width IP20 Strip light
NKL-12	Fixing clips for 12mm width IP20 Strip light
NKD-8	Fixing clips for 8mm width IP44 Strip light
NKD-10	Fixing clips for 10mm width IP44 Strip light
NKD-12	Fixing clips for 12mm width IP44 Strip light
KC-8-COB strip light	Universal Fixing clips for 8mm width
KC-10-COB strip light	Universal Fixing clips for 8mm width

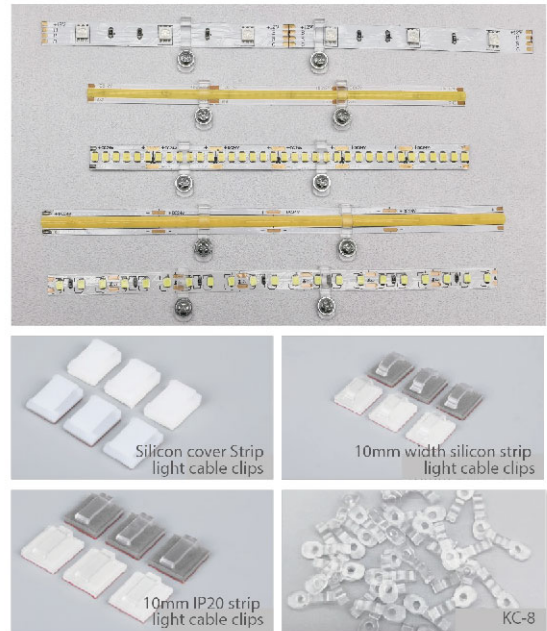

# Welding - free Connectors With Cable

Item No.	IP20 strip light connector
A2P-8	8mm single side outlet
A2P-10	10mm single side & single colour outlet
A3P-10	10mm3P single side outlet
A4P-10	10mmRGB single side outlet
A5P-10	10mm5P single side outlet
A2P-12	12mm single side & single colour outlet
A4P-12	12mmRGB single side outlet
A5P-12	12mm-5P single side outlet
A2T-2P-8	8mm connector with cable
A2T-2P-10	10mm single side & single colour outlet
A2T-3P-10	10mm3P connector with cable
A2T-4P-10	10mmRGB connector with cable
A2T-5P-10	10mm5P connector with cable
A2T-2P-12	12mm single side & single colour outlet
A2T-4P-12	12mmRGB connector with cable
A2T-5P-12	12mm-5P connector with cable
A2P-8-DC	8mm connector with cable
A2P-10-DC	10mm single side & single colour outlet
A3P-10-3MK	10mm3P single side outlet
A4P-10-4MK	10mmRGB connector with cable
A5P-10-5MK	10mm5P connector with cable
A2P-12-DC	12mm single side & single colour outlet
A4P-12-4MK	12mmRGB connector with cable
A5P-12-5MK	12mm-5P connector with cable























# Welding - free Connectors Without Cable

**Power supply:** DC36V/5A  
**Operating temperature:** -10°C-45°C

Item No.	IP20 strip light connector
B2P-8	8mm width connector without cable
B2P-10	10mm single colour connector without cable
B3P-10	10mm3P width connector without cable
B4P-10	10mmRGB single colour connector without cable
B5P-10	10mm5P width connector without cable
B2P-12	12mm single colour connector without cable
B4P-12	12mmRGB width connector without cable
B5P-12	12mm5P width connector without cable
B2P-8-L	8mm connector in L shape
B2P-10-L	10mm single colour connector in L shape
B3P-10-L	10mm3P connector in L shape
B4P-10-L	10mmRGB connector in L shape
B5P-10-L	10mm5P connector in L shape
B2P-12-L	12mm single colour connector in L shape
B4P-12-L	12mmRGB connector in L shape
B5P-12-L	12mm5P connector in L shape
B2P-8-T	8mm connector with T type
B2P-10-T	10mm single colour connector in L shape
B3P-10-T	10mm3P connector with T type
B4P-10-T	10mmRGD connector with T type
B5P-10-T	10mm5P connector with T type
B2P-12-T	12mm single colour connector in L shape
B4P-12-T	12mmRGB connector with T type
B5P-12-T	12mm5P connector with T type
B2P-8-+	8mm connector with + type
B2P-10-+	10mm connector with single colour and + type
B3P-10-+	10mm3P connector with + type
B4P-10-+	10mmRGB connector with + type
B5P-10-+	10mm5P connector with + type
B2P-12-+	12mm connector with single colour and + type
B4P-12-+	12mmRGB connector with + type
B5P-12-+	12mm5P connector with + type













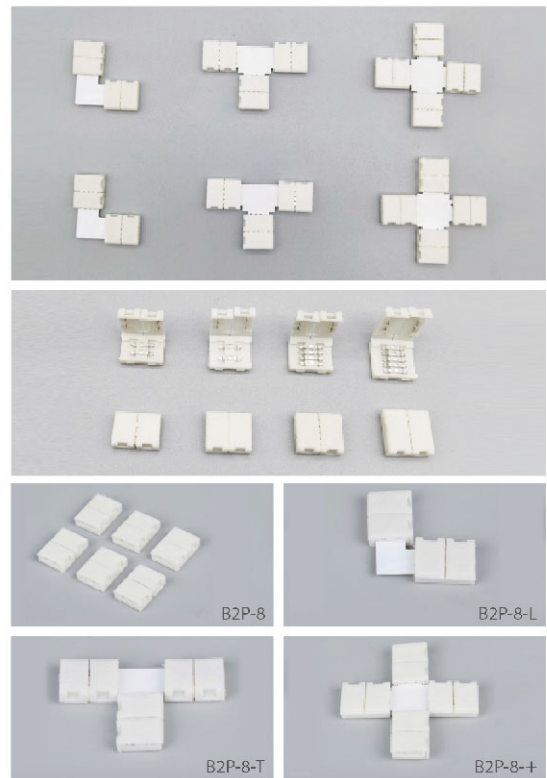


# Aluminal Colour Series

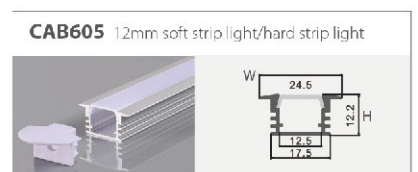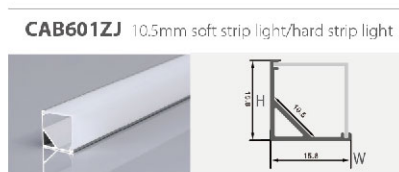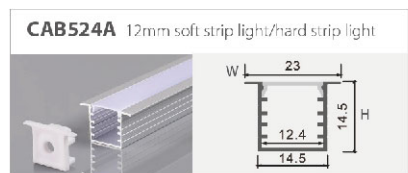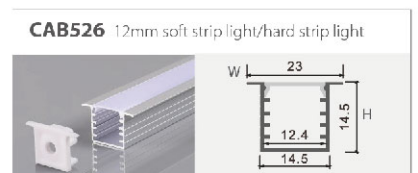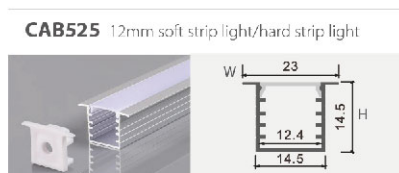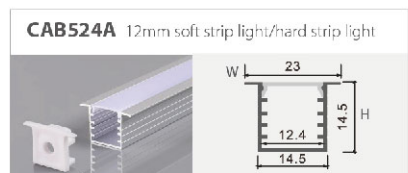
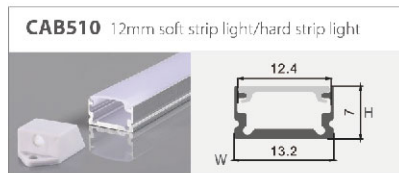
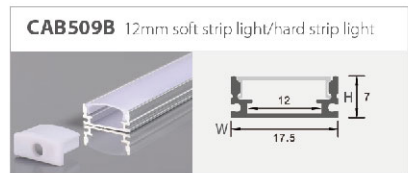
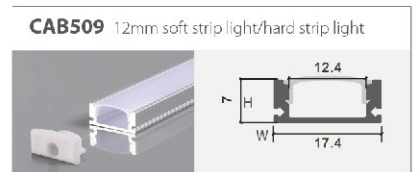
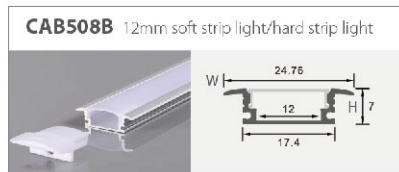
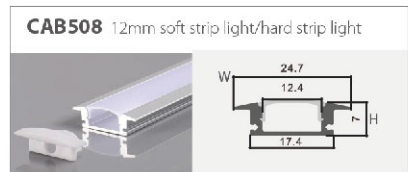
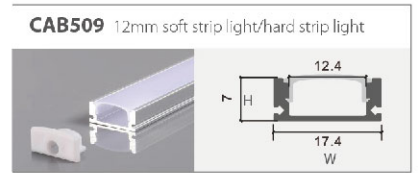
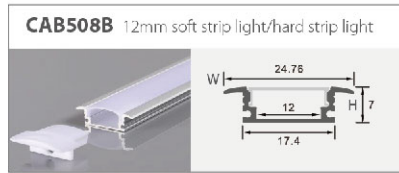
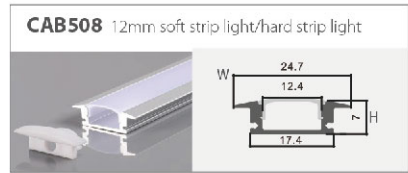
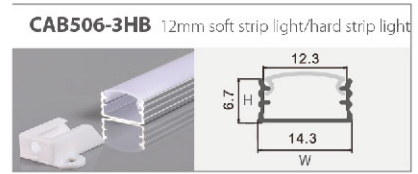
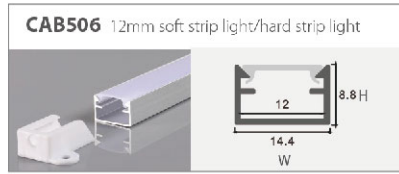
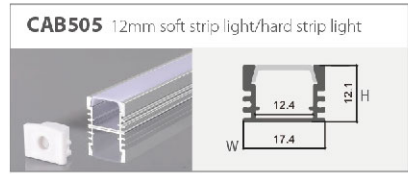




# Aluminal Colour Series

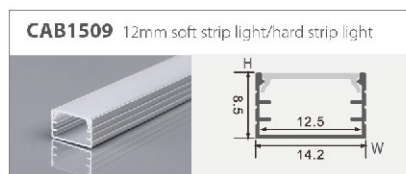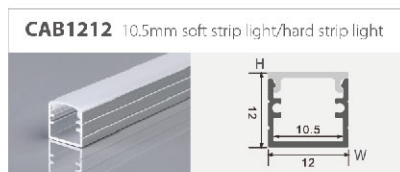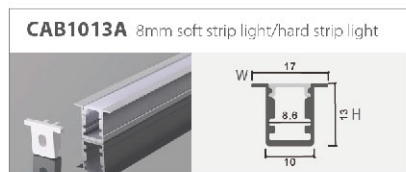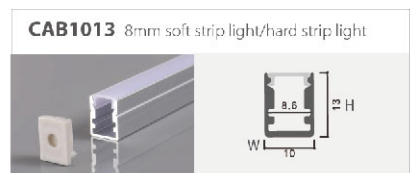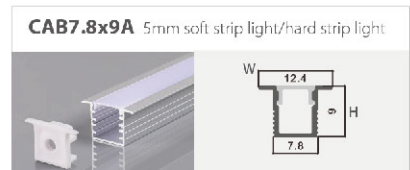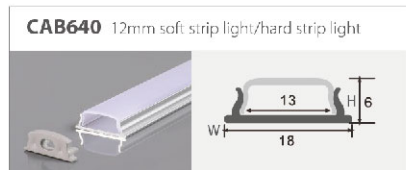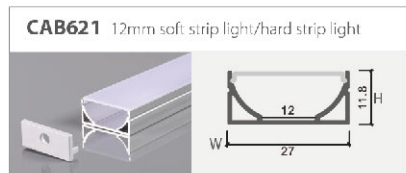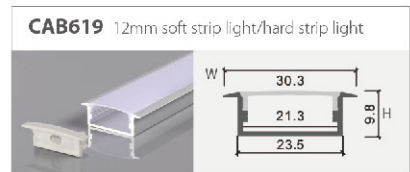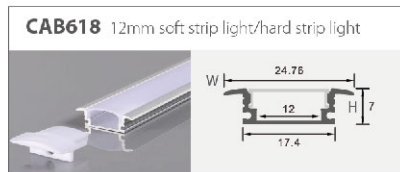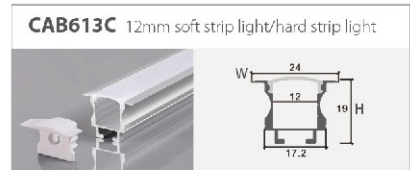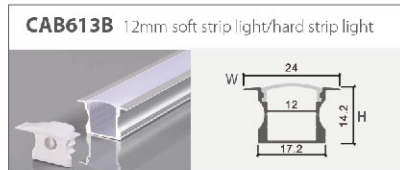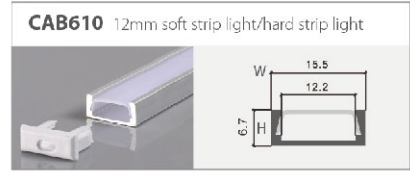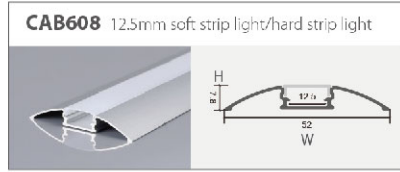

# Aluminal Colour Series

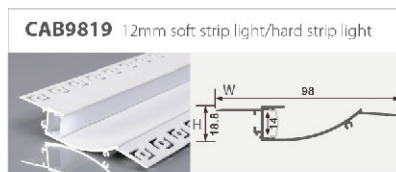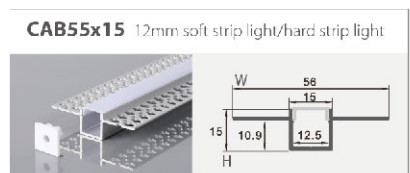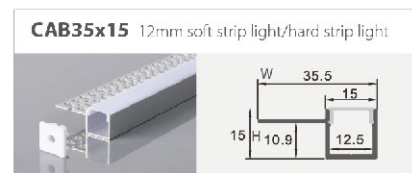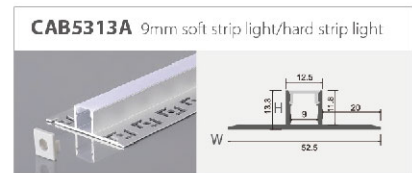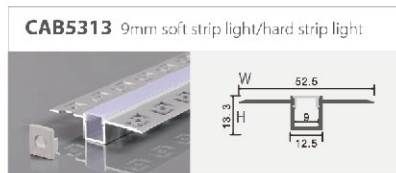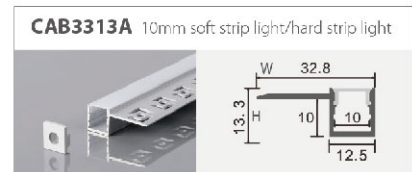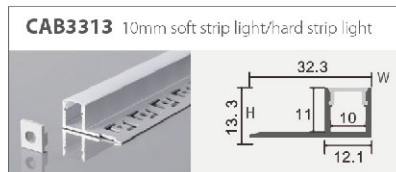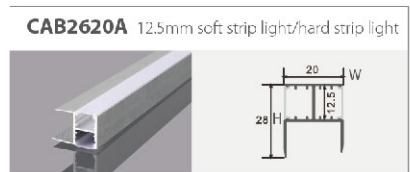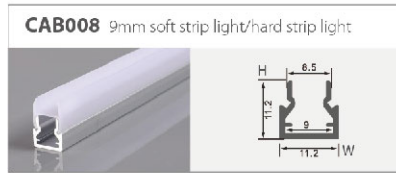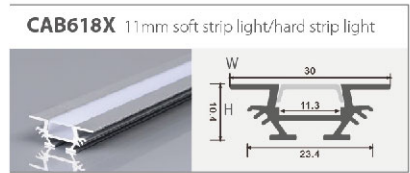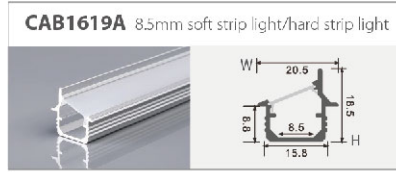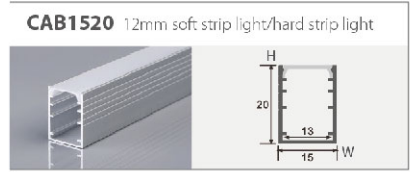



# Aluminal Colour Series

**CAB806** 10mm soft strip light/hard strip light

**CAB6525-A** 12mm soft strip light/hard strip light

**CAB6525-B** 12mm soft strip light/hard strip light

**CAB5840** 12mm soft strip light/hard strip light







**CAB632A** 12mm soft strip light/hard strip light

**CAB632** 12mm soft strip light/hard strip light

**CAB632AA** 12mm soft strip light/hard strip light









# Black Series

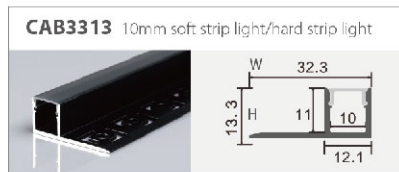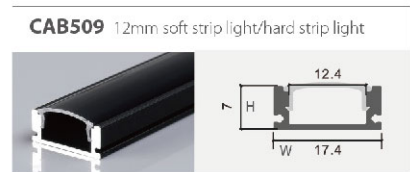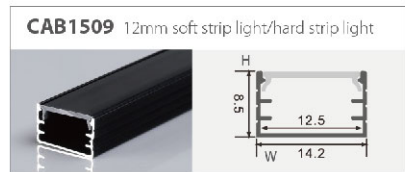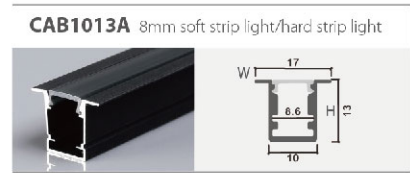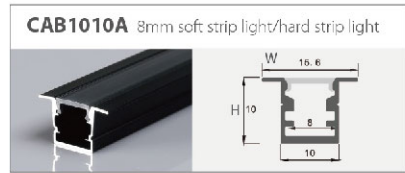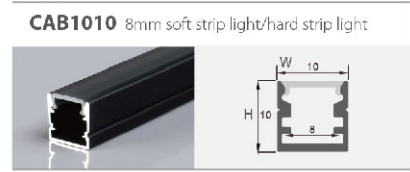



# Black Series

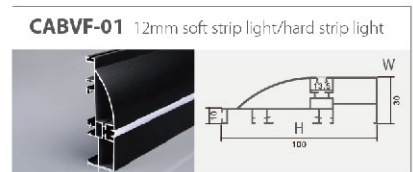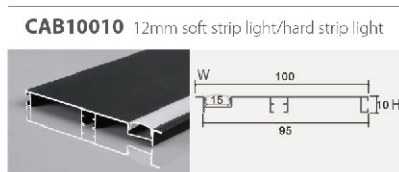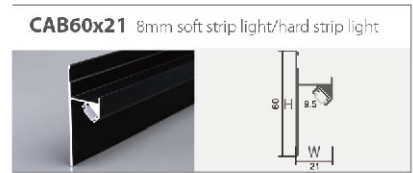
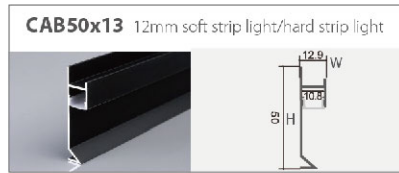
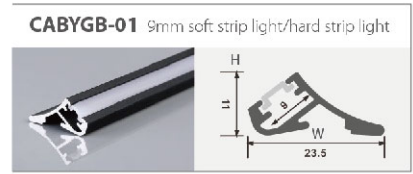
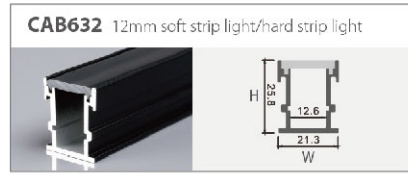


# Other Colour Series









<p><b>CAB7.8x9A</b> 5mm soft strip light/hard strip light</p>	<p><b>CAB1010A</b> 8mm soft strip light/hard strip light</p>	<p><b>CAB7.8x9A</b> 5mm soft strip light/hard strip light</p>
<p><b>CAB7.8x9A</b> 5mm soft strip light/hard strip light</p>	<p><b>CAB1010</b> 8mm soft strip light/hard strip light</p>	<p><b>CAB1010</b> 8mm soft strip light/hard strip light</p>
<p><b>CAB1010</b> 8mm soft strip light/hard strip light</p>	<p><b>CAB1010A</b> 8mm soft strip light/hard strip light</p>	<p><b>CAB1010A</b> 8mm soft strip light/hard strip light</p>
<p><b>CAB1312A</b> 10mm soft strip light/hard strip light</p>	<p><b>CAB1312A</b> 10mm soft strip light/hard strip light</p>	<p><b>CAB1312A</b> 10mm soft strip light/hard strip light</p>
<p><b>CAB618</b> 12mm soft strip light/hard strip light</p>	<p><b>CAB618</b> 12.5mm soft strip light/hard strip light</p>	<p><b>CAB605</b> 12mm soft strip light/hard strip light</p>
<p><b>CAB605B</b> 12mm soft strip light/hard strip light</p>	<p><b>CAB605</b> 12mm soft strip light/hard strip light</p>	<p><b>CABTJX01</b> 5mm soft strip light/hard strip light</p>
<p><b>CABYGD-03</b> 4.2mm soft strip light/hard strip light</p>	<p><b>CABYGD-03</b> 4.2mm soft strip light/hard strip light</p>	<p><b>CABYGD-02</b> 3.6mm soft strip light/hard strip light</p>
<p><b>CAB2620A</b> 12.5mm soft strip light/hard strip light</p>	<p><b>CAB2620A</b> 12.5mm soft strip light/hard strip light</p>	<p><b>CAB2620A</b> 12.5mm soft strip light/hard strip light</p>




# Other Colour Series

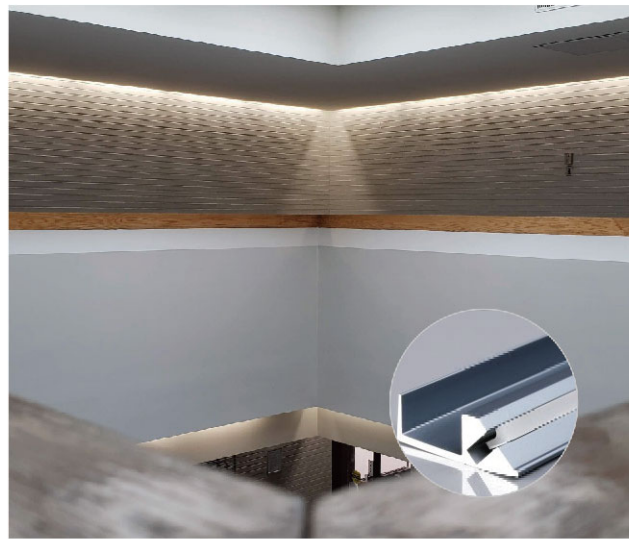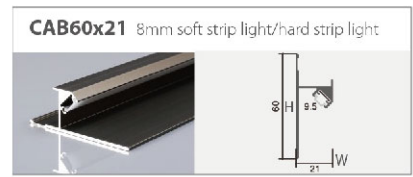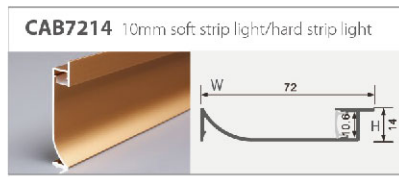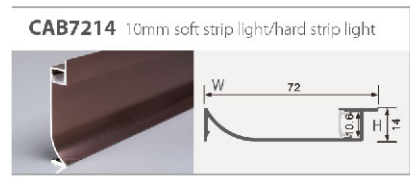

# Different Diffuser Selection (Creamy white/black/white honeycomb/black honeycomb)

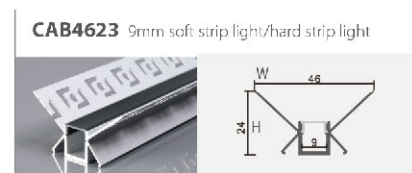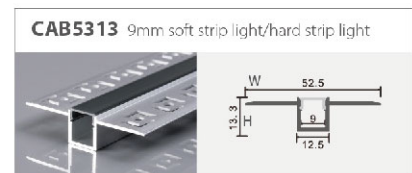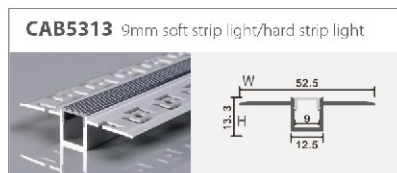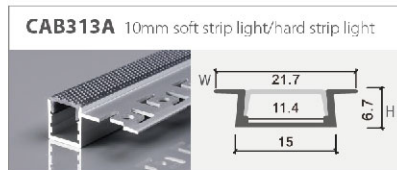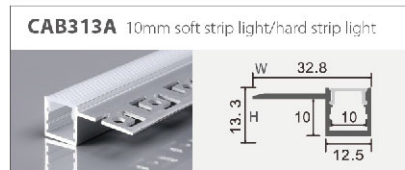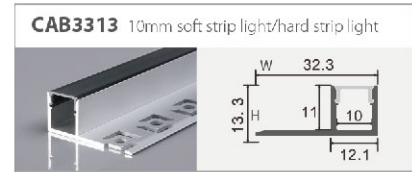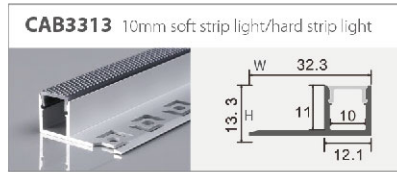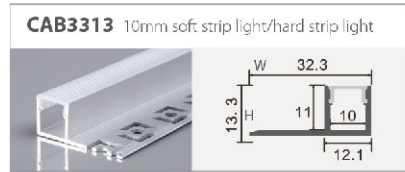



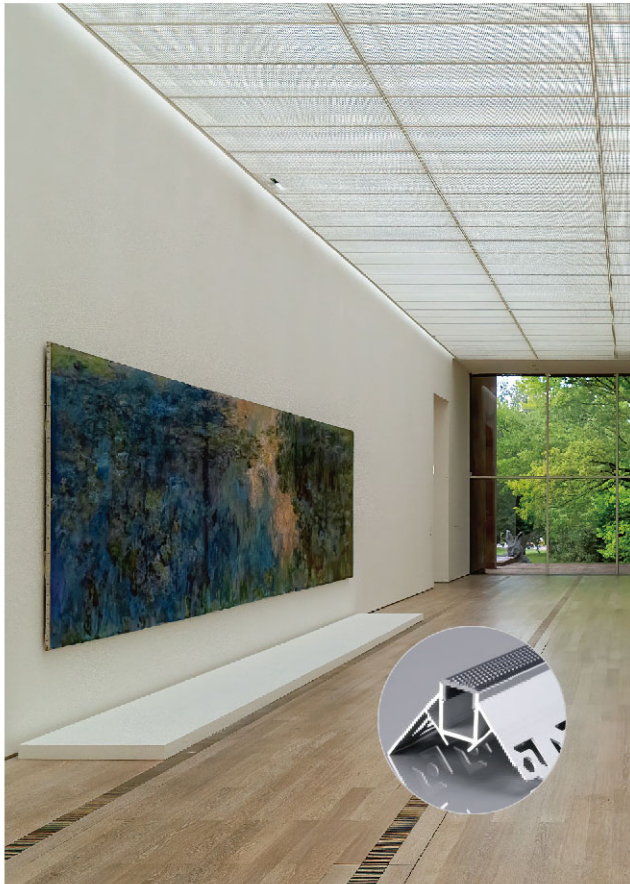



# Connectors


120° Outer connectors



130° Outer connectors



90° Outer connectors



180° Outer connectors



T shape connector



+ shape connector



90° Inner connector



Y shape connector




L shape connector 1



L shape connector 2













L shape connector 3

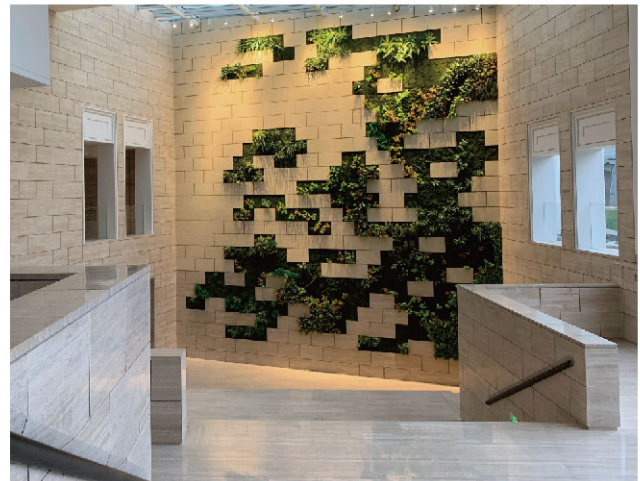



# LED Silicone Tube

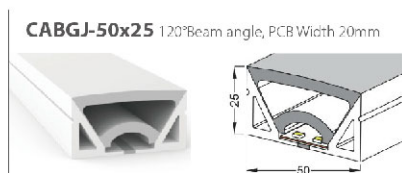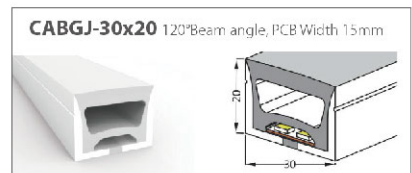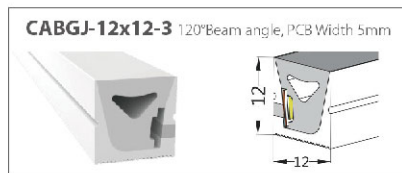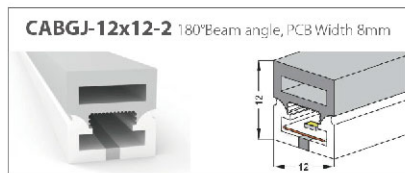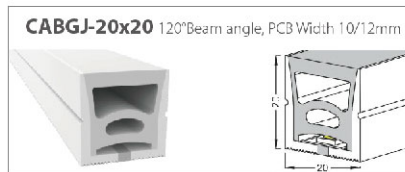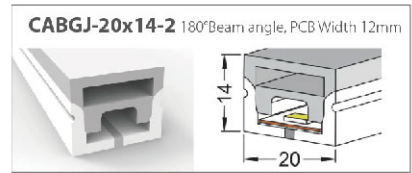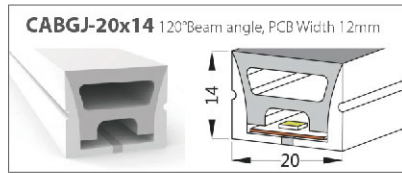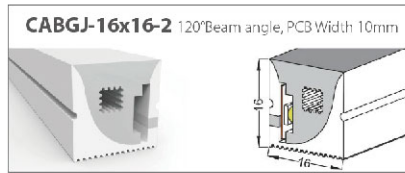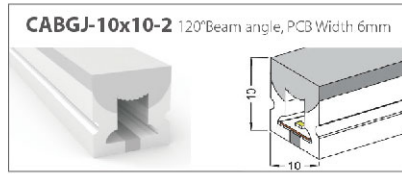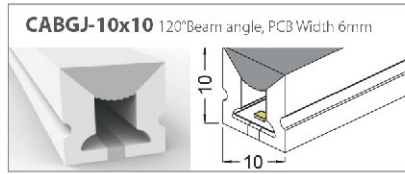





***LED Neon Lights & String Lights***





# LED String Light **NEW**

## SMART CHRISTMAS LIGHT STRING




**LD3001C-4W3WF-G1**  
Light Chain

AC100-240V DC4.5V 2.7W




**LD3001C-4W3WF-G1**  
Curtain

AC100-240V DC4.5V 2.7W

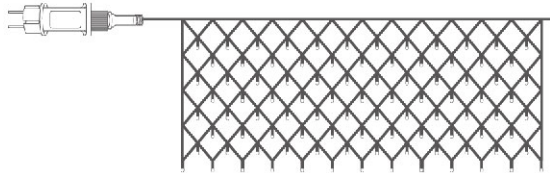


**LD3001C-6W3WF-G1**  
Net

AC100-240V DC3.1V 3.6W

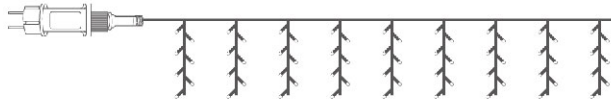

**LD3001C-4W3WF-G1**  
Curtain




AC100-240V DC4.5V 3.6W

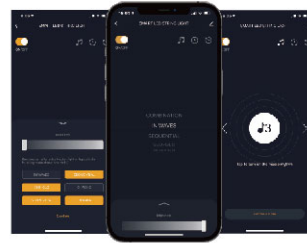


- Support APP Remote Control
- Timmer Setting
- Follow the Music to Change the Light



Colors Available

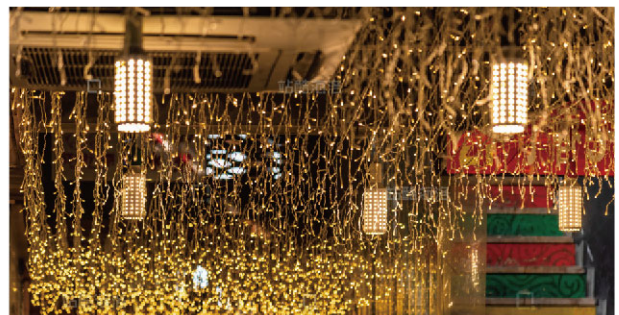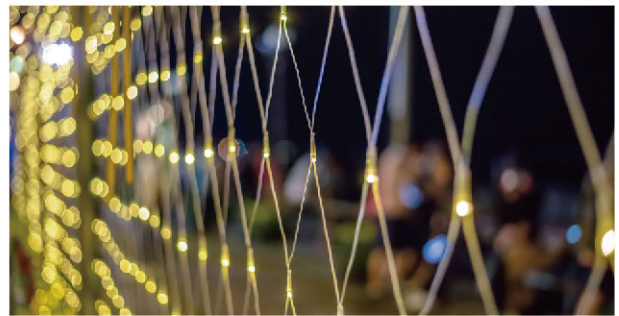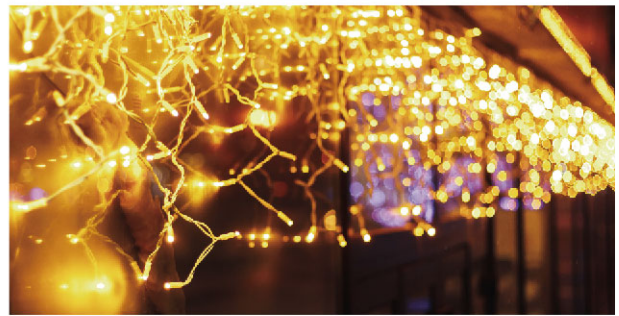

# LED String Light NEW

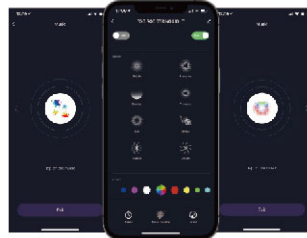

- Support APP Remote Control
- Timmer Setting
- Follow the Music to Change the Light
- Clap toggle function



## LD3003C-8W3WF3-G1

Light Chain

AC100-240V DC6V 8.4W

24	5m	H /	10cm
Ø5mm	100		

Colors Available




## LD3003C-8W3WF3-G1

Light Chain

AC100-240V DC6V 8.4W

8	5m	H /	10cm
Ø5mm	120		

Colors Available

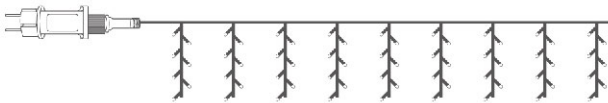

## LD3003C-8W3WF3-G1

Curtain

AC100-240V DC6V 8.4W


8	5m	H /	5cm
Ø5mm	204		

Colors Available





# LED String Light **NEW**

## TWO-COLOR INDUCTION LAMP BEADS

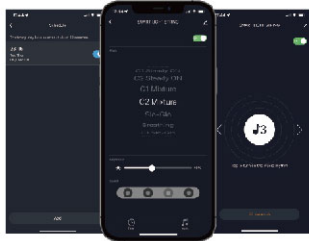

- Support APP Remote Control
- Timmer Setting
- Follow the Music to Change the Light

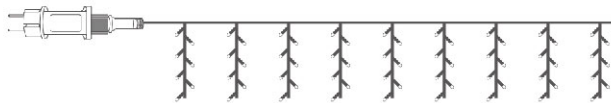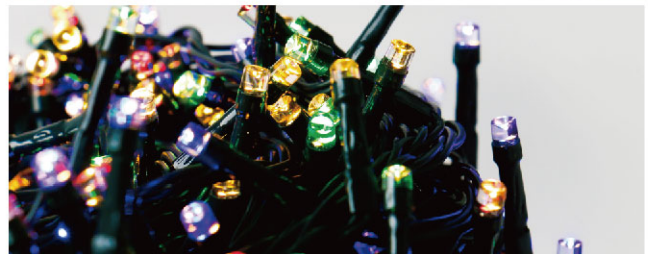


**LD3005C-4W3WF-G1**  
Curtain AC100-240V DC4.5V 3.6W

8 5m 30cm 10cm  
 Ø5mm 300




**LD3005C-3W3WF-G1**  
Light Chain AC100-240V DC4.5V 2.7W

24 5m / 10cm  
 Ø5mm 100

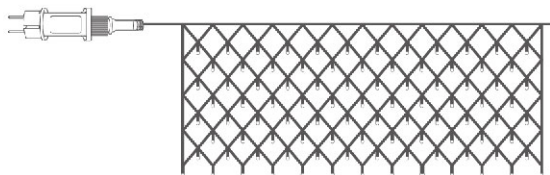


**LD3005C-6W3WF-G1**  
Net AC100-240V DC31V 3.6W

8 5m 2\*2m /  
 Ø5mm 160

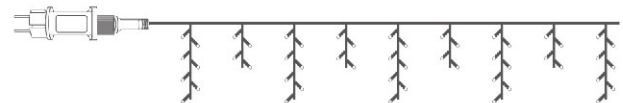

**LD3005C-6W3WF-G1**  
Icicle AC100-240V DC31V 3.6W

8 5m / 10cm  
 Ø5mm 240

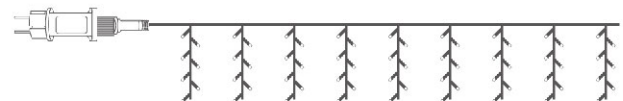


**LD3005C-4W3WF-G1**  
Curtain AC100-240V DC31V 3.6W

24 5m / 10cm  
 Ø5mm 200


# LED String Light **NEW**



- **APP control** --- equipped with TUYA smart chips, which can control the color and lighting mode of the lamp. This multi-color and variety of different patterns adorn all your special occasions, creating an amazing visual impact.
- **Durable wires and bulbs** --- our string lights are made of IP44 waterproof, PC cover and heavy wire materials. The design of high-grade decorative light strings can withstand harsh weather conditions. It will withstand all kinds of harsh weather and provide years of enjoyment.
- **Ideal decorative lamp** --- adopts a variety of color lighting and lighting methods to provide you with a soft and romantic atmosphere in parties, weddings, birthdays, festivals, anniversaries and other occasions. It is very suitable for balconies, gardens, decks, backyards, porches, balconies, cafes, restaurants, etc. to create the best atmosphere and beautiful lighting show.

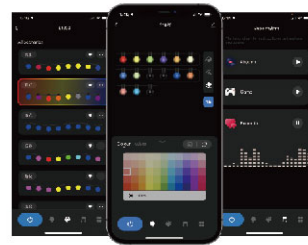

- Support APP Control Each Bulb Individually
- Timmer Setting
- Follow the Music to Change the Light
- Colors Available

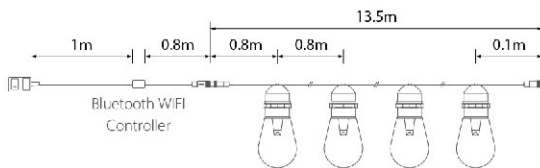

Dazzle



Light-Catching



Gradual




**LD30315C-05W3WF-G1**

PC3 core chandelier models

AC100-240V DC12V 1A






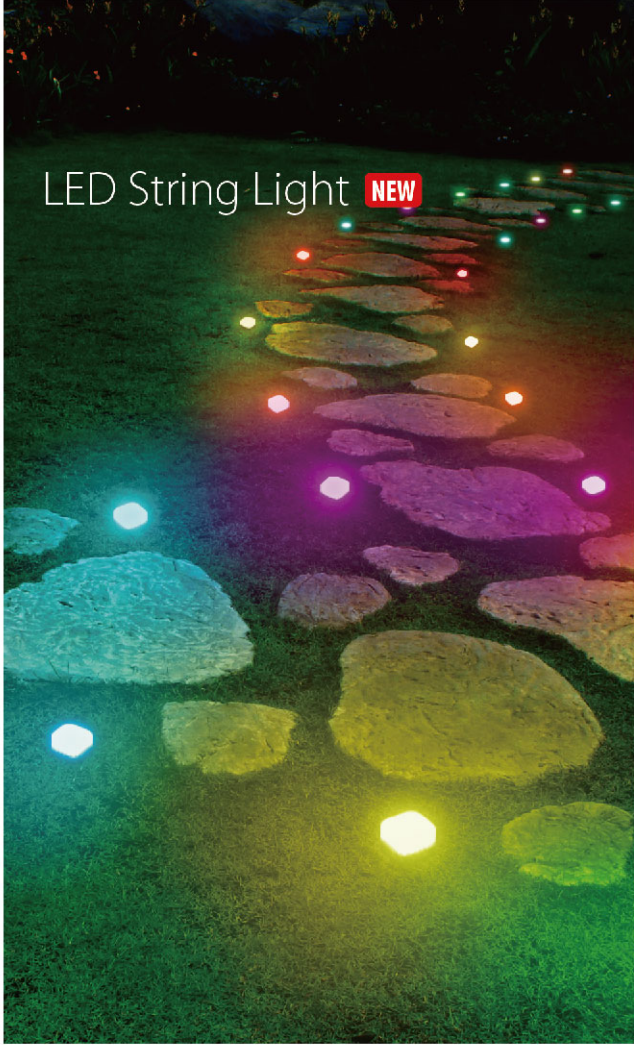

# LED String Light NEW



- **APP control** --- equipped with TUYA smart chips, which can control the color and lighting mode of the lamp. This multi-color and variety of different patterns adorn all your special occasions, creating an amazing visual impact.
- **Durable wires and bulbs** --- our string lights are made of IP44 waterproof, PC cover and heavy wire materials. The design of high-grade decorative light strings can withstand harsh weather conditions. It will withstand all kinds of harsh weather and provide years of enjoyment.
- **Ideal decorative lamp** --- adopts a variety of color lighting and lighting methods to provide you with a soft and romantic atmosphere in parties, weddings, birthdays, festivals, anniversaries and other occasions. It is very suitable for balconies, gardens, decks, backyards, porches, balconies, cafes, restaurants, etc. to create the best atmosphere and beautiful lighting show.

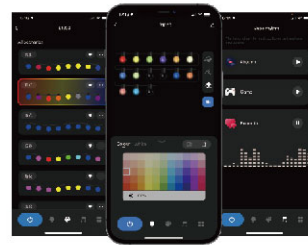

- Support APP Control Each Bulb Individually
- Timmer Setting
- Follow the Music to Change the Light
- Colors Available



Dazzle



Light-Catching



Gradual



**LD30316-8W3WF3-G1**

PC3 core chandelier models

AC100-240V DC12V 1A

